


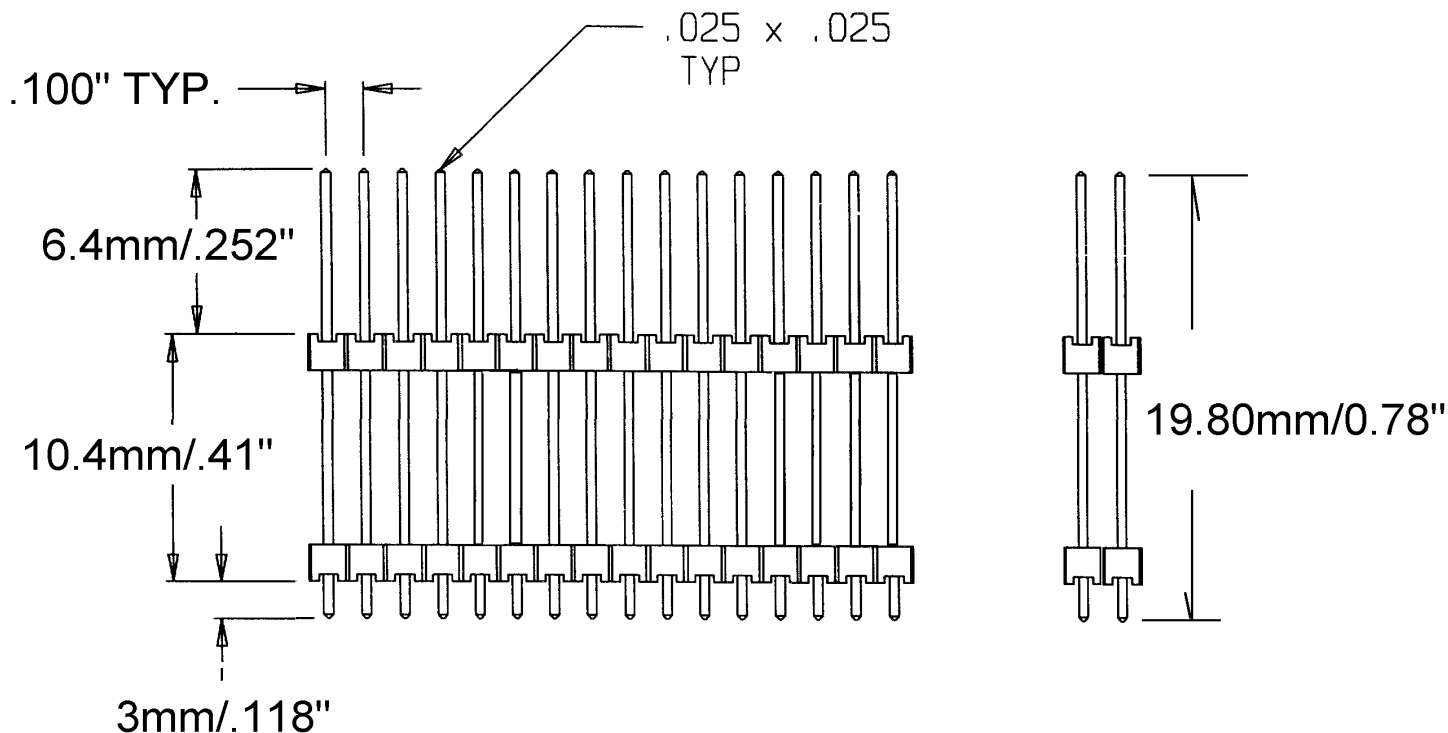

NOTES:

1. INSULATOR MATERIAL: BLACK GLASS FILLED POLYESTER.
2. TERMINAL MATERIAL: PHOSPHOR BRONZE.
3. CURRENT RATING: 3A CONTINUOUS.
4. OPERATING RANGE: -65°C TO +125°C.
5. PLATING: GOLD FLASH GOLD OVER 50μ" NICKEL
6. UL RATED
7. APPLY TO APC# 715-0050

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE: FRACTIONS DECIMALS ANGLES X.XXX ±0.005 MATERIAL  FINISH  DO NOT SCALE DRAWING	DRAWN S. CASPER 14 JUL 97		HO CHIEN www.hochien.com						
	ENGINEER D. DUBOIS 14 JUL 97								
	CHECKED D. DUBOIS 9/22/97		ITEM CONN, HDR, 25P. .1CTR X .41H STKG						
	ISSUED - -		PRODUCT 2542-2 PIN HEADER						
ARCHIVE MEDIA CODE 71500091.PRT		SIZE A		FSCM NO.		DWG. NO. 2542-2-2X25G-01		REV. 1	
THIRD ANGLE PROJECTION 									
		SCALE 2 : 1		FIRST USED ON				SHEET 1 OF 1	