
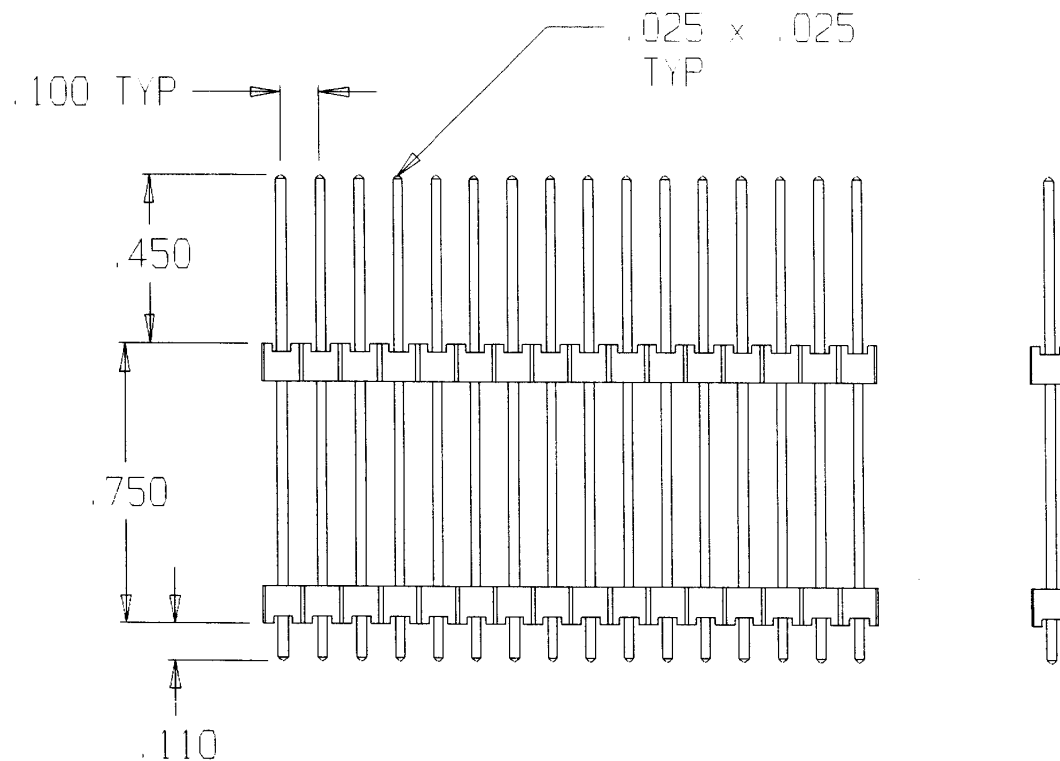





NOTES:

1. INSULATOR MATERIAL: BLACK GLASS FILLED POLYESTER.
2. TERMINAL MATERIAL: PHOSPHOR BRONZE.
3. CURRENT RATING: 3A CONTINUOUS.
4. OPERATING RANGE: -65°C TO +125°C.
5. PLATING: GOLD OVER 50u" NICKEL ON CONTACT AREA OF LONGER TAIL, GOLD FLASH ON BALANCE.
6. UL RATED AND CSA CERTIFIED.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE:		
FRACTIONS	DECIMALS	ANGLES
X.XXX ±0.005		
MATERIAL 		
FINISH 		
DO NOT SCALE DRAWING		

DRAWN	S. CASPER	14 JUL 97
ENGINEER	D. DUBOIS	14 JUL 97
CHECKED	D. DUBOIS	9/22/97
ISSUED	-	-
ARCHIVE MEDIA		71500091.PRT
CODE		
THIRD ANGLE PROJECTION		
		

HO CHIEN www.hochien.com			
ITEM CONN, HDR, 16P, 1CTR X .75H STKG			
PRODUCT 2544-2 PIN HEADER			
SIZE A	FSCM NO.	DWG. NO. 2544-2-1X16G-01	REV. 1
SCALE 2 : 1	FIRST USED ON		SHEET 1 OF 1