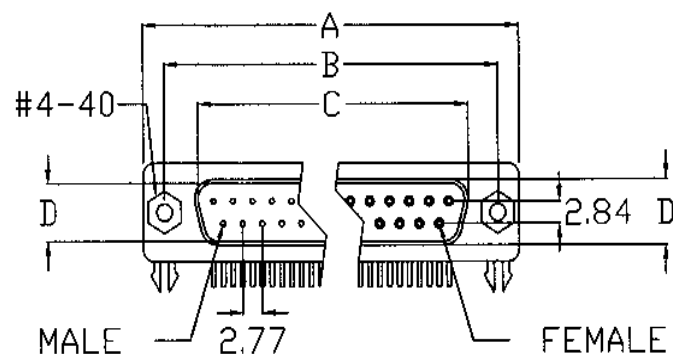

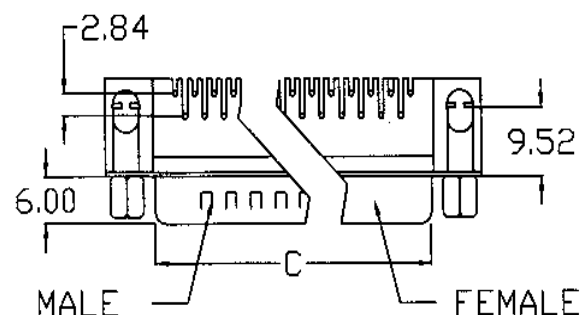


3013 - ☐ (FE)
PIN NO: ONLY "*" "

3013 -

TYPE	PIN NO.	SHELL PLATED	MONTNING
☐	☐	☐	☐
0:MALE 1:FEMALE	1:09 PIN 2:15 PIN 3:19 PIN 4:23 PIN 5:25 PIN 6:37 PIN	Z:Zinc plated T:Tin plated	Blank:W/BOARDLOCK SCROW FIXED A:RIVET W/BOARDLOCK AJ:RIVET W/BOARDLOCK & SCROW FIXED B:RIVET W/NON-THREAD L-SHAPE BJ:RIVET W/NON-THREAD L-SHAPE SCROW FIXED C:W/NON-THREAD L-SHAPE SCROW FIXED G:W/RIVET ONLY

MATERIAL

SOCKET CONTACT : Phosphor bronze Brass Gold-plated over nickel

INSULATOR : PBT & 30% Glass-fibre Reinforced UL-94-VO

CURRENT RATING : 5 amp

DIELECTRIC STRENGTH : 1000V for one minute

INSULATOR RESISANCE : 1000MΩ Min. at 500V DC

INSULATOR : Glass filled Nylon UL-94VO

TEMPERATURE : -55°C ~ +105°C

FE : Ferrite (EMI)

Dimension (mm)

Position	Plug (M) / Recept (F)	A	B	C	D	E
*09	Plug (M)	30.81	24.88	16.92	8.36	19.28
	Recept (F)			16.33	7.90	
*15	Plug (M)	39.14	33.32	25.25	8.36	27.51
	Recept (F)			24.66	7.90	
19	Plug (M)	44.70	38.81	30.73	8.36	33.03
	Recept (F)			30.15	7.90	
23	Plug (M)	50.28	44.30	36.22	8.36	38.54
	Recept (F)			35.64	7.90	
*25	Plug (M)	53.04	47.04	38.96	8.36	41.30
	Recept (F)			38.38	7.90	
*37	Plug (M)	69.32	63.50	55.42	8.36	57.71
	Recept (F)			54.84	7.90	



HO CHIEN ENTERPRISE CO. LTD

UNIT : mm

TOLERANCE : ± 0.25

TITLE : D-SUB CONNCTOR (STAMPED PIN)
3013-☐ D-SUB P.C.B. RIGHT ANGLE CONNECTOR
3013-☐ FE D-SUB P.C.B. RIGHT ANGLE CONNECTOR (EMI)

DR : RON CHEN	CHK : J.T,CHEN	APPD : C.Y.LIN	PAGE: 1 OF 1	HO CHIEN PIN NO. 3013 - ☐ 3013 - ☐ (FE)
------------------	-------------------	-------------------	-----------------	--