
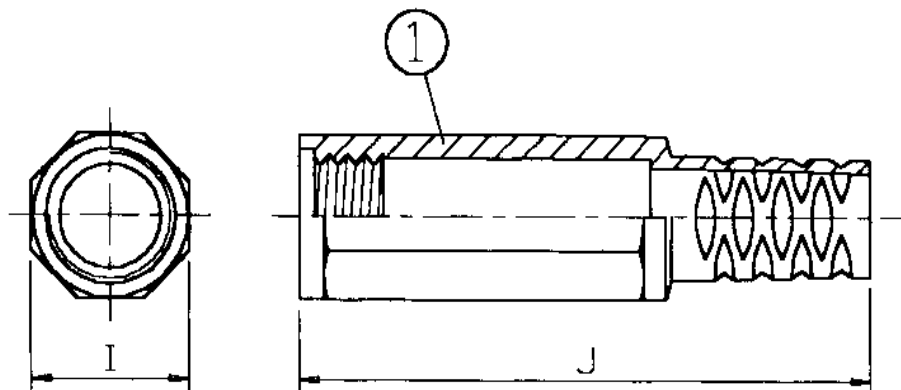


A	$\phi 3 \pm 0.1$	G	35.1 ± 0.1
B	$\phi 3.2 \pm 0.05$	H	3.8
C	$\phi 3.5 \pm 0.05$	I	10.2 ± 0.1
D	$\phi 8$	J	37.6 ± 0.3
E	14.2	K	52.3 ± 0.3
F	5.5		

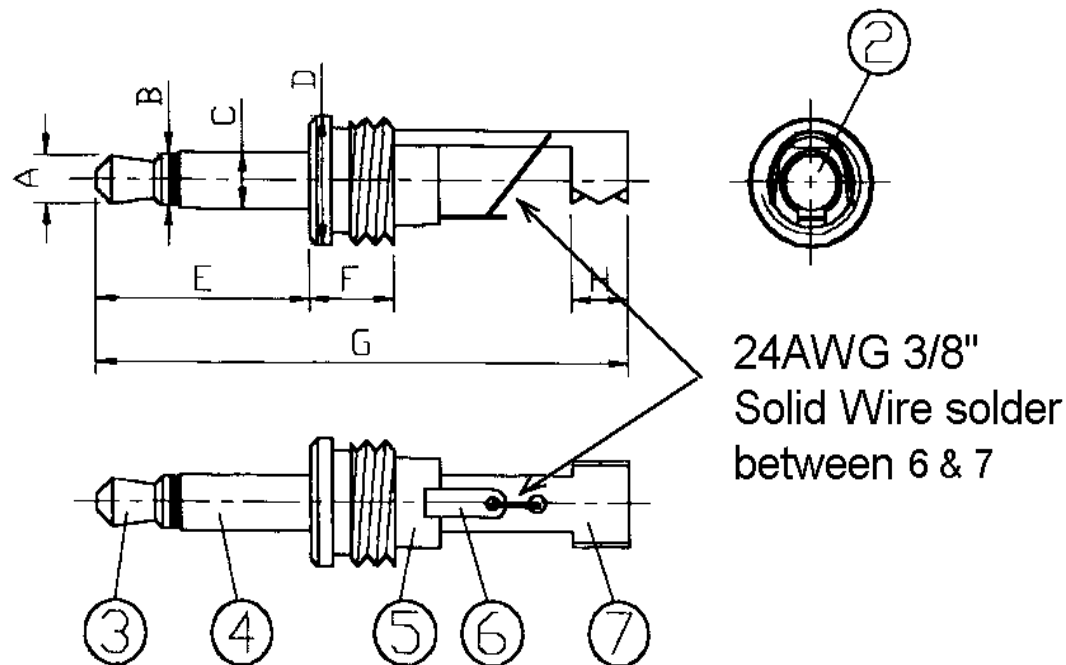

7	BIG COPPER SLICE	BRONZE		
6	SMALL SOLDER SLICE	BRONZE		
5	WHITE GRANULE	PDM		WHITE
4	COPPER TUBE & HEAD	BRONZE		
3	PEARL HEAD	BRONZE		
2	IRON TACK	BRONZE		
1	ANISE SHAPED SHELL	PE-208		BLACK
NO	DESCRIPTION	MATERIAL	DISPOSE	REMARK

HO CHIEN

TITLE

3.5MM MONO
PLUG

ITEM

8609-01

UNIT

mm

SCALE


2:1

DATE

910319

DRAWER

1. Make from 8609
2. Solder 24AWG 3/8" section of solid core wire as shown.
3. Trim any protruding wire from mounting holes and remove any flux residue.
4. Assembly Cap to Plug

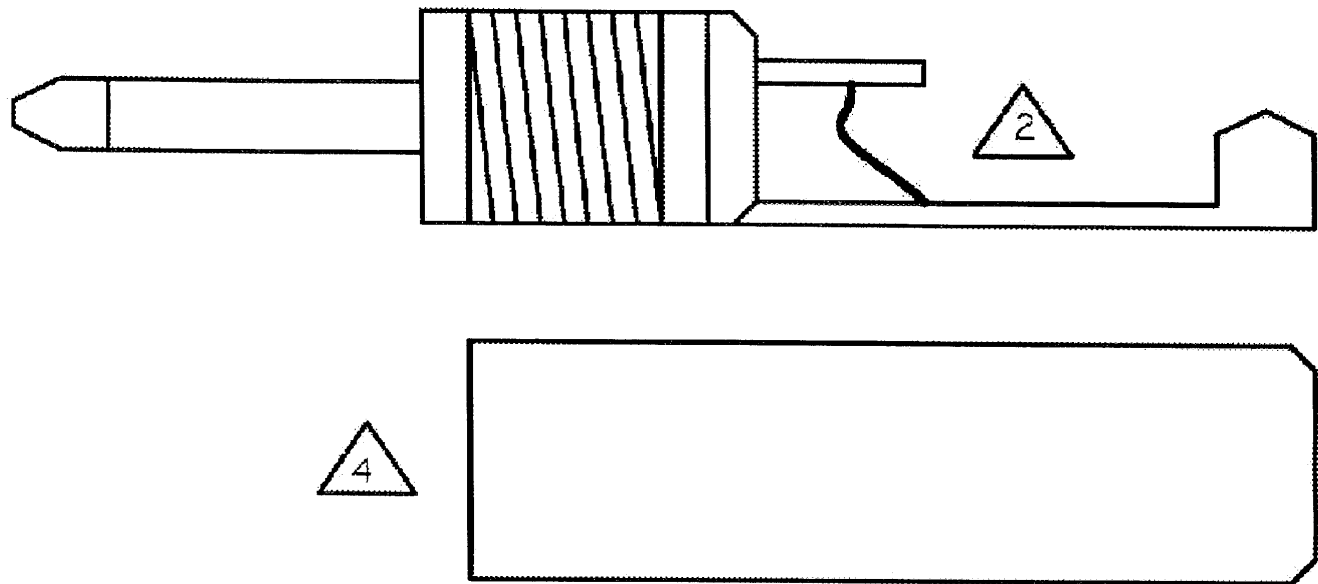

HO CHIEN <i>www.hochien.com</i>			
8609-01		G30 Interlock Plug	
N. Spatz		10/06/04	REV 000