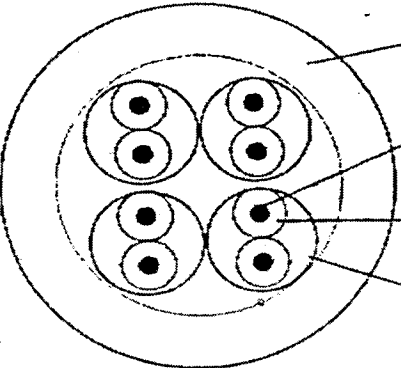


| SPECIFICATION: 4P*24AWG                                                        |               |                  | CONSTRUCTION D.W.G                                                                                                                                    |                |
|--------------------------------------------------------------------------------|---------------|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| ITEM                                                                           |               | SPECIFICATION    |                                                                     |                |
| CONDUCTOR                                                                      | AWG           | 24AWG            |                                                                                                                                                       |                |
|                                                                                | MATERIAL      | BARE COPPER      |                                                                                                                                                       |                |
|                                                                                | COND.SIZE     | 7/0.203±0.008 mm |                                                                                                                                                       |                |
| INSULATION                                                                     | MIN.AVG.THICK | 0.15 mm          |                                                                                                                                                       |                |
|                                                                                | MATERIAL      | HD-PE            |                                                                                                                                                       |                |
|                                                                                | O.D           | 0.99±0.05 mm     |                                                                                                                                                       |                |
|                                                                                | N.O.          | 4P               |                                                                                                                                                       |                |
| JACKET                                                                         | MIN.AVG.THICK | 0.50 mm          |                                                                                                                                                       |                |
|                                                                                | MATERIAL      | LIGHT PVC (TUBE) |                                                                                                                                                       |                |
|                                                                                | COLOUR        | GY22             |                                                                                                                                                       |                |
|                                                                                | O.D           | 5.70 ± 0.15 mm   |                                                                                                                                                       |                |
| ELECTRICAL CHARACTERISTICS                                                     |               |                  | COLOUR CODE:                                                                                                                                          |                |
| 1. Rating: TEMP 75°C<br>2. Conductor Resistance: AT 20°C MAX 24AWG: 93.25Ω/km; |               |                  | 1.BLUE * WHITE/BLUE      2.ORANGE* WHITE /ORANGE<br>3. GREEN* WHITE/GREEN    4. BROWN* WHITE/BROWN                                                    |                |
|                                                                                |               |                  | MARKING                                                                                                                                               |                |
|                                                                                |               |                  | E188601 (UL) TYPE CM 24AWG/4PRS(17) LL84201 CSA TYPE CMG FTA<br>UTP ETL VERIFIED TO TIA/EIA-568-B.2 CATEGORY 5E PATCH CORD PLANNED COMMUNICATIONS INC |                |
|                                                                                |               |                  | REMARK                                                                                                                                                |                |
|                                                                                |               |                  |  <b>COPARTNER WIRE &amp; CABLE<br/>(SHENZHEN) MFG CO., LTD.</b>  |                |
|                                                                                |               |                  | PART NO. 4400824E75                                                                                                                                   |                |
|                                                                                |               |                  | APPROVED                                                                                                                                              | CUSTOMER 伸束    |
|                                                                                |               |                  | CHECKED                                                                                                                                               | REV A/0        |
|                                                                                |               |                  | DRAWING ZTL                                                                                                                                           | DATE 2003/6/12 |

CP-EW-206A