



Note

1. Cable: 4/2 Wire, AWG#24, Unshielded, & Untwisted Cable.


Non-Shield Cable

2. The cable is designed for the connector mounted on VFD glass side with its lock latch faced upper or adjacent to the edge of glass.

Item	Part No.	QTY.	Remarks
1	02-03-20090	1	9 POS. Female D-Sub
2	HD-9	1	Plastic D-Sub CVR 4/40C
3	22-01-2065	1	Melex Housing
4	08-50-0113	4	or 08-52-0101 Melex Crimp
5	5014C	2.25 FT.	Alpha 4C/24 or [equiv.
6	163-0300	1	Mouse or Equir.
7		1 IN.	Shrink Tube
8	5012C	0.75 FT.	Alpha 2C/24 or [equiv.

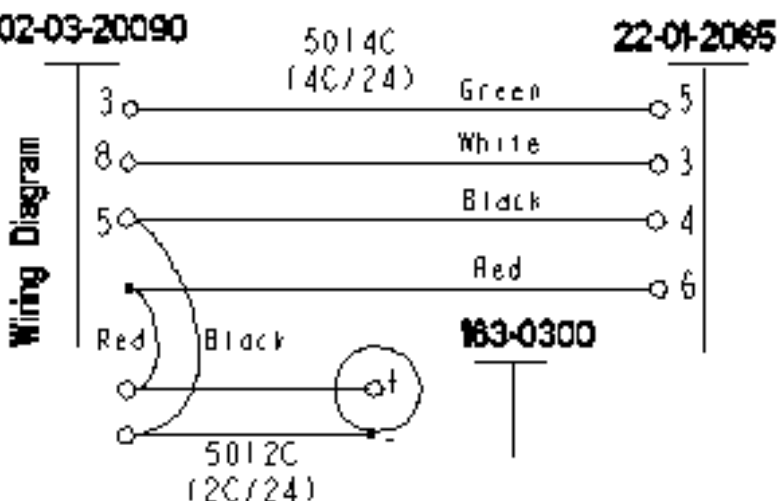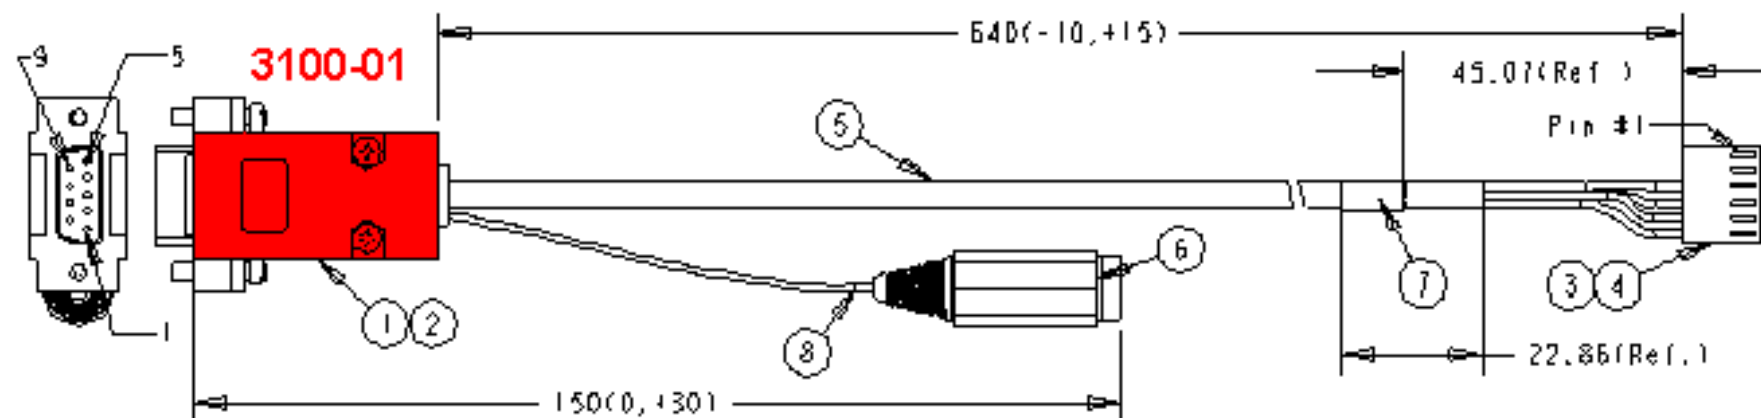

Rev.	Date	Description	Req.	Appd.
1	11/4/02	Created new NTC P/N.	MM	GC

 HO CHIEN Technology	(Please attention notes: All drawing tolerances are ±0.128.)		Data Cable with Power Line for GU 7000			
	REV	MM	REV	Date	P/N	
HO CHIEN			00-1	Date	CA-B6070-0001	
			00-2	Date	NTC-04-0004	
			00-3	Date	DRW No.	SRT