


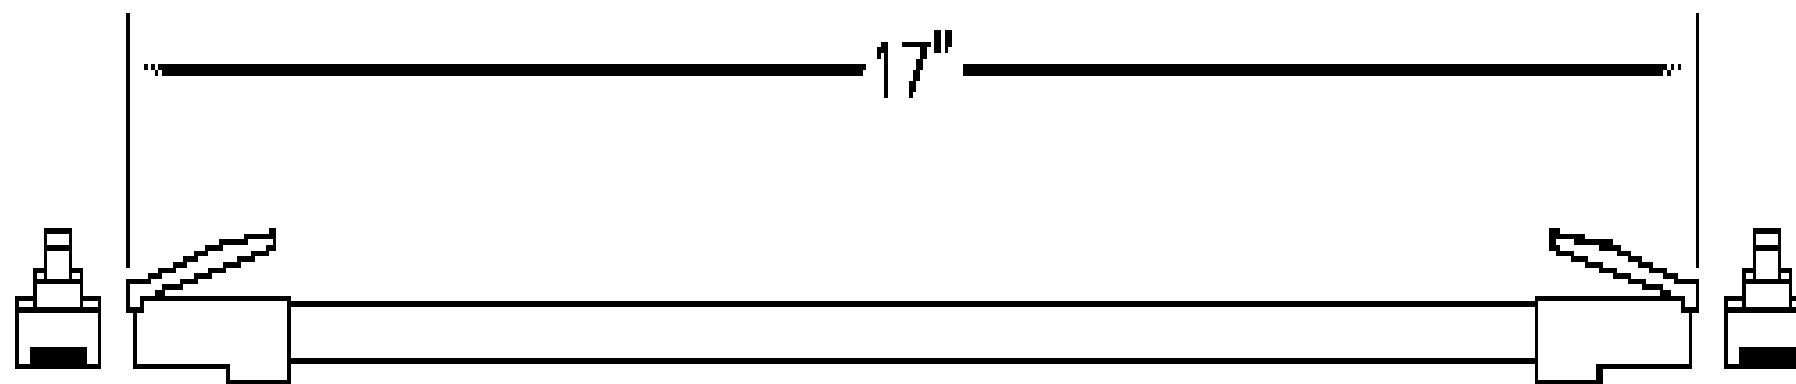

NOTES: UNLESS OTHERWISE SPECIFIED

1. CABLE SPEC: CAT5E, 8 WIRE, ONE TO ONE

2. Cat5E cable marking 300V and any others marking
as UL & CSA requested.

Details see page 2 for reference.

HO CHEN

www.hochien.com

CA-C5039-0002A

CBL-C53-XX-AM

CABLE CONSTRUCTION				87103019
Specifiction No.:	7/0.21BA *4PR		P/N.	L4S280BM0H54IO
UL File NO.:	E129760	CSA File NO.: LL80671	Date:	11-11-98'
	CM--CAT5	CSA Style: II A/B	Draw NO.:	CAT-5C.XLS
Construction Item			Construction ItemA	
Conductors	Construction AWG		AWG	24
	Material		--	Bare copper
	Conductors No:		--	7
	Conductors AWG:		AWG	32
	Conductors Size		mm	0.21
	O.D.		mm	0.63
Insulators	Material		--	PE
	Diameter		mm	0.98+/-0.05
	Average Thickness		mm	0.18 REF
	Color		--	AS COLOR CORE
Twist Pair	Direction		--	Right
Filler	Material		--	--
Layer	Pitch		mm	130 REF
	Direction			Left
	Diameter		mm	3.77 REF
Outside Jacket	Material		--	PVC
	Diameter		mm	5.30+/-0.15
	Average Thickness		mm	0.77 REF
	Extrusion		--	Semi-tubing
	Surface		--	Plane
	Color		--	C068
Marking	(A34) MULTI-LAN VERIFIED (UL) CAT5 AND ETL TO EIA/TIA -568A 4UTP			
	24AWG CM E129760 CSA LL80671 AWM II A/B 80 C 300V FT4			