



REVISION HISTORY				BY	DATE	APPROVED
REV	DESCRIPTION					
01	REVISED PRIOR TO RELEASE LENGTH INCREASED IDENTIFICATION LABELS ADDED			JLP	11/18/06	JLP
A	REVISED IAW ECO BU449			JLP	12/1/06	AL/JW/JHC

—	—	EMPTY	A1,A2,A5 SHELL	
J9	SHELL CENTER	COAX. SHIELD COAX. COND	A3 SHELL CENTER	PLAY 2 OUT
J8	SHELL CENTER	COAX. SHIELD COAX. COND	A4 SHELL CENTER	PLAY 1 OUT
J11	SHELL CENTER	COAX. SHIELD COAX. COND	A6 SHELL CENTER	LOOP
J10	SHELL CENTER	COAX. SHIELD COAX. COND	A7 SHELL CENTER	REF IN
J7	SHELL CENTER	COAX. SHIELD COAX. COND	A8 SHELL CENTER	RECORD IN
—	WIRE COLOR		J1	
PRO PANEL	WIRE CONNECTION TABLE			SIGNAL NAMES

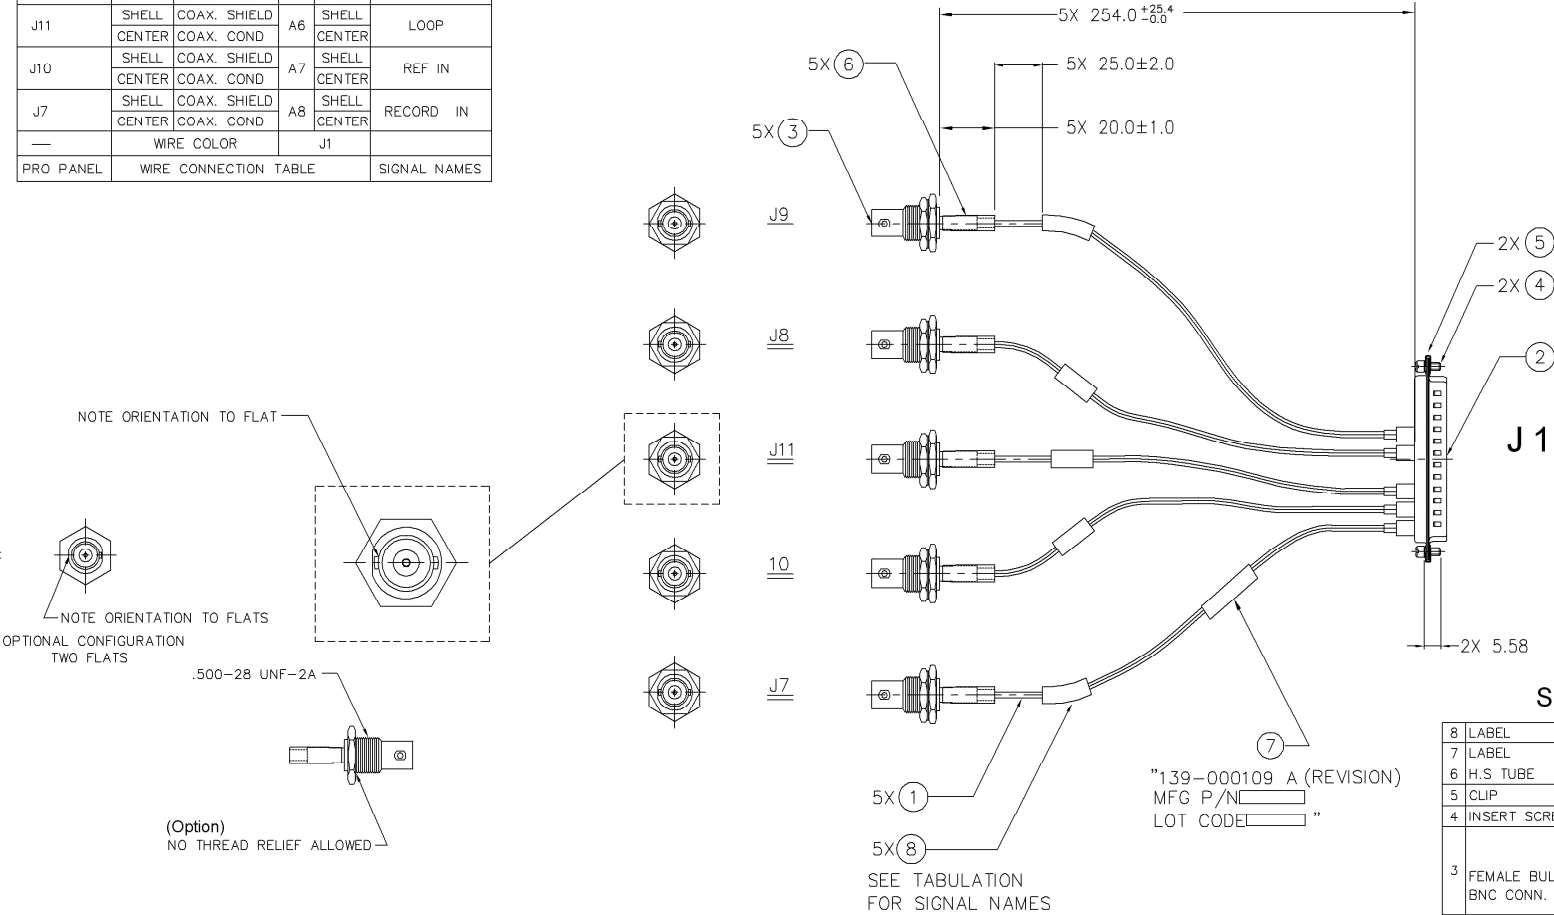

SPECIFICATION CONTROLLED

8	LABEL	5	SIGNAL NAME IDENTIFICATION LABEL (SEE TABULATION)
7	LABEL	1	CABLE IDENTIFICATION LABEL
6	H.S TUBE	5	UL224, COLOR: BLACK
5	CLIP	2	IRON, NICKEL PLATED, T=0.3MM
4	INSERT SCREW	2	STEEL, #4-40UNC-2A NICKEL PLATED
3	FEMALE BULKHEAD BNC CONN.	5	BODY AND FERRULE: BRASS, NICKEL PLATED CONTACT: BRASS, 15u" GOLD PLATED INSULATOR: TEFLON; NUT: BRASS IMPEDANCE: 75Ω
2	MALE 8W8P CONN.	1	INSULATOR: PBT, COLOR: BLACK, UL94V-0 SHELL: STEEL, NICKEL PLATED CONTACT: BRASS, 15u" GOLD PLATED, IMPEDANCE: 75Ω FERRULE: BRASS, GOLD FLASH
1	CABLE	5	CABLE: RG179/U 75Ω 28-30 AWG JACKET: BLACK PVC OD=2.55MM,
No.	ITEM	QTY	DESCRIPTION

NOTES: UNLESS OTHERWISE SPECIFIED

1 ALL DIMENSIONS ARE "MM".

2. ANY OPEN, MISWIRING, SHORT AND INTERMITTENT ARE NOT PERMITTED

3. INSULATION RESISTANCE: 5M OHMS/300V DC MIN.

4. DRAWING MAY NOT BE REMSED WITHOUT PRIOR HARRIS APPROVAL

5. CABLE MIN BEND RADII TO BE 23.0MM

RoHS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE				CABLE VIDEO 3 CHANNEL			
XXX +- .005	APPROVALS	DATE		HO CHIEN www.hochien.com PN# CA-B5042-0009			
.XX +- .015	J.PIDKOWICZ	FEB/28/06					
X +- .030	D.OESTER	FEB/28/06		139 000109			
DO NOT SCALE DRAWING	J.WATKINS	FEB/28/06		A			
	H.CREVE	FEB/28/06		SCALE: 1 OF 1			