


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
00	RELEASED IAW ECO	12/20/05	HC

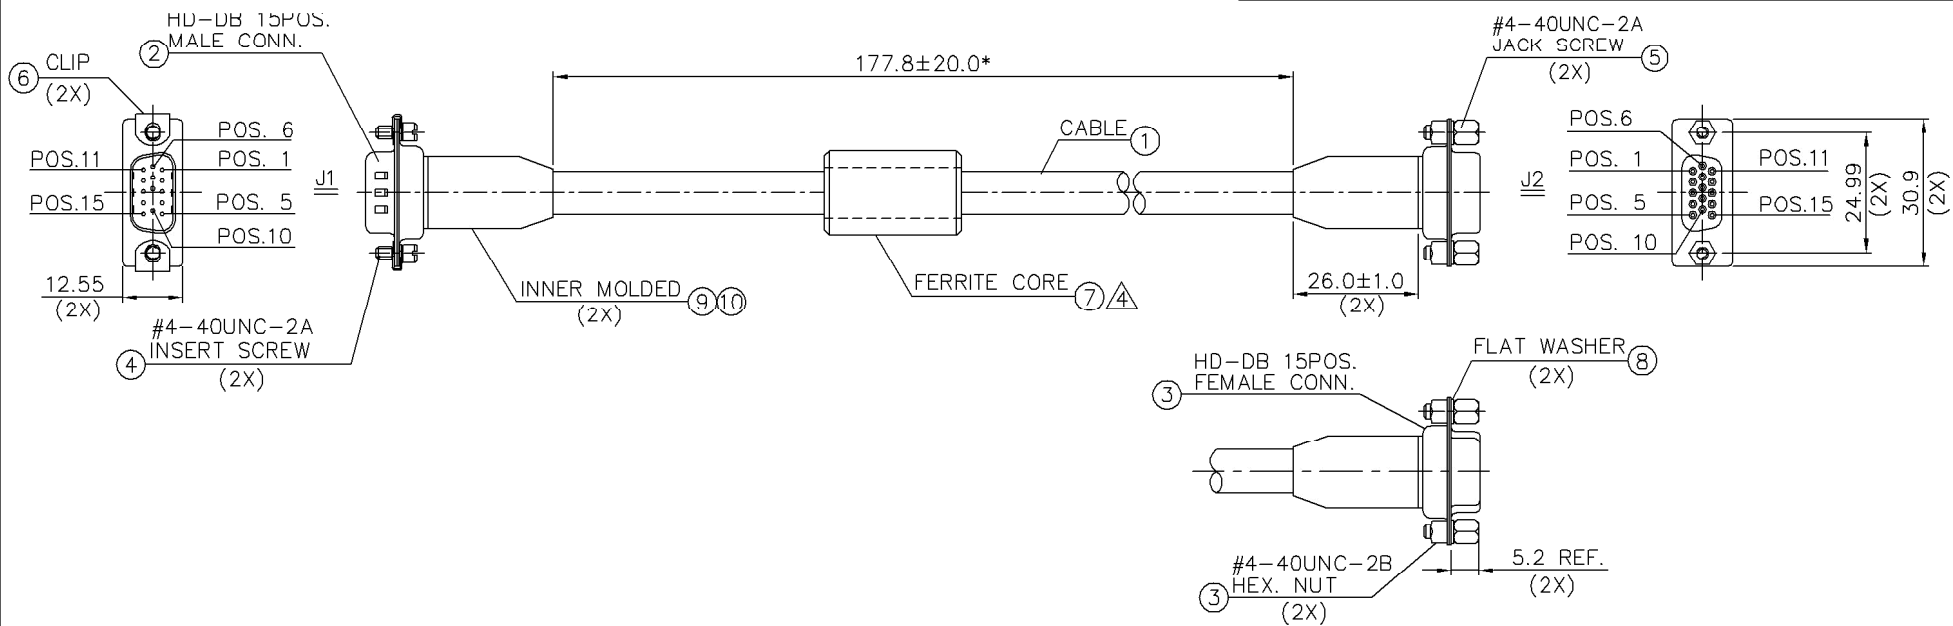

SHELL	EMPTY	9 SHELL
9	NO PIN	---
---	BRAID & DRIAN WIRE	---
15	BLACK	15
14	BROWN	14
12	RED	12
11	ORANGE	11
5	YELLOW	5
4	GREEN	4
10	GRAY	COAX. SHIELD 10
13		COAX. COND. 13
8	BLUE	COAX. SHIELD 8
3		COAX. COND. 3
7	GREEN	COAX. SHIELD 7
2		COAX. COND. 2
6	RED	COAX. SHIELD 6
1		COAX. COND. 1
J1	WIRE COLOR	J2

WIRE CONNECTION TABLE

NOTES:

- ALL DIMENSIONS ARE "MM".
 - ANY OPEN, MISWIRING, SHORT & INTERMITTENT ARE NOT PERMITTED.
 - INSULATION RESISTANCE: 20M OHMS/250V DC MIN.
- ⚠ KEEP THE FERRITE CORE LOOSE.

10	INNER MOLDED	14gm	PE, FOR MOLDED, COLOR: NATURAL
9	H.S TUBE	8PCS	I.D=ø1.0MM, L=20.0MM, UL224, COLOR: BLACK
8	FLAT WASHER	2PCS	I.D=ø3.0MM, L=10.0MM, UL224, COLOR: BLACK
7	FERRITE CORE	1PC	I.D=ø3.1MM, O.D=ø5.5MM, NICKEL PLATED
6	CLIP	2PCS	O.D=ø17.5MM, I.D=ø10.6MM, L=28.5MM
5	JACK SCREW	2PCS	IMPEDANCE: >95 Ω /25MHZ, >173 Ω /100MHZ
4	INSERT SCREW	2PCS	IRON, NICKEL PLATED, T=0.30MM
3	HD D-SUB 15POS. FEMALE CONN.	1PC	CONTACT: COPPER ALLOY, GOLD FLASH INSULATOR: PBT, UL94V-0, COLOR: BLACK SHELL: STEEL, NICKEL PLATED HEX NUT: #4-40UNC-2B, NICKEL PLATED
2	HD D-SUB 15POS. MALE CONN.	1PC	CONTACT: COPPER ALLOY, GOLD FLASH, NO PIN. 9 INSULATOR: PBT, UL94V-0, COLOR: BLACK SHELL: STEEL, NICKEL PLATED
1	CABLE	1PC	#28X4COAX+#26X6C+AL./MYLAR +DRAIN WIRE +BRAID COVERAGE: 85% MIN+JACKET: PVC UL2919, O.D=ø9.0±0.2MM (OUTER BRAID TO BE REMOVED) COLOR: BLACK(600-BLK-001)
No.	ITEM	Q'TY	DESCRIPTION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE .XXX +- .005 .XX +- .015 ANGULAR +- .1" .X +- .030 DO NOT SCALE DRAWING				CABLE VGA 15 PIN LOW PROFILE				
		APPROVALS						DATE
MATERIAL		DRAWN J PIDKOWICZ	09/06/05		HO CHIEN www.hochien.com			
		CHECKED J PIDKOWICZ	12/20/05					
		ENGR J WATKINS	12/20/05		PN# CA-B5042-0013			
MGR H CREVE	12/20/05							
FINISH				SIZE	PRJ NO.	DWG NO.	REV	
				C		139-000107	00	
				SCALE: NONE		SHEET 1 OF 1		