


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
00	RELEASED IAW ECO BU377	2/27/06	JLP/DJO
A	RELEASED IAW ECO BU449	12/1/06	AL/JW/HC

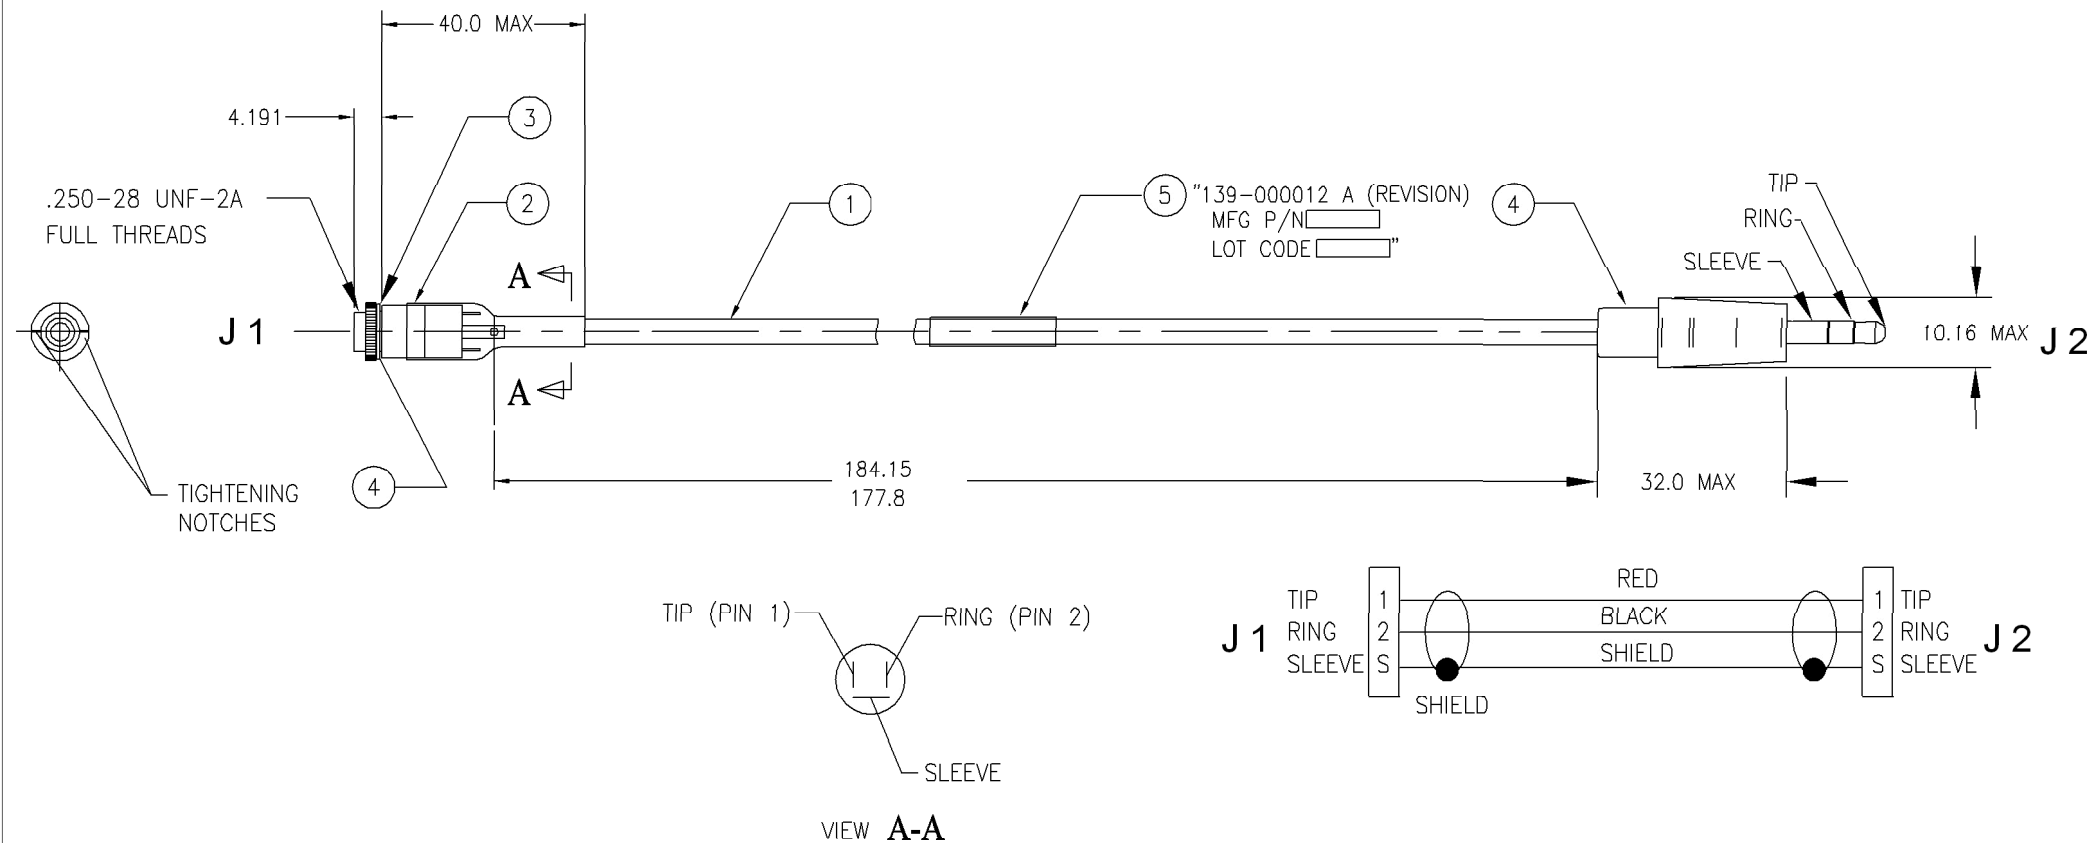

NOTES: UNLESS OTHERWISE SPECIFIED

- ALL DIMENSIONS ARE "MM"
- ANY OPEN, MISWIRING, SHORT AND INTERMITTENT ARE NOT PERMITTED.
- INSULATION RESISTANCE: 20M OHMS/250V DC MIN
- CABLE MIN BEND RADII TO BE 17MM

5	LABEL	1	CABLE IDENTIFICATION LABEL
4	STEREO PLUG	1	3.5MM STEREO PLUG WITH MOLDED STRAIN RELIEF NICKEL-PLATED
3	LOCK WASHER	1	EXTERNAL TOOTH LOCK WASHER .023-.028 THICK
2	PANEL MT JACK	1	3.5MM STEREO PANEL MOUNT JACK WITH MOLDED STRAIN RELIEF
1	CABLE	1	#24 AWG 2C WITH DRAIN WIRE+AL/MYLAR O.D=Ø 3.63MM MAX, PVC JACKET COLOR: BLK
NO.	ITEM	QTY	DESCRIPTION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE		APPROVALS		DATE		CABLE AUDIO, STEREO	
.XXX ± .005	1	DESIGN	J. PIDKOWICZ	9/6/05		HO CHIEN	
.XX ± .015		CHECKED	J. PIDKOWICZ	12/20/05		www.hochien.com	
.X ± .030		MFG				PN# CA-B5042-0014	
DO NOT SCALE DRAWING		DESIGN APPROVAL	J. WATKINS	12/20/05	SIZE D	PRJ NO.	DWG NO.
			H. CREVE	12/20/05			139-000112
							REV A
						SCALE: TO FIT	SHEET 1 OF 1

RoHS