


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
00	RELEASED IAW ECO BU377	2/27/06	JLP/DJO
A	RELEASED IAW ECO BU449	12/1/06	AL/JW/HC

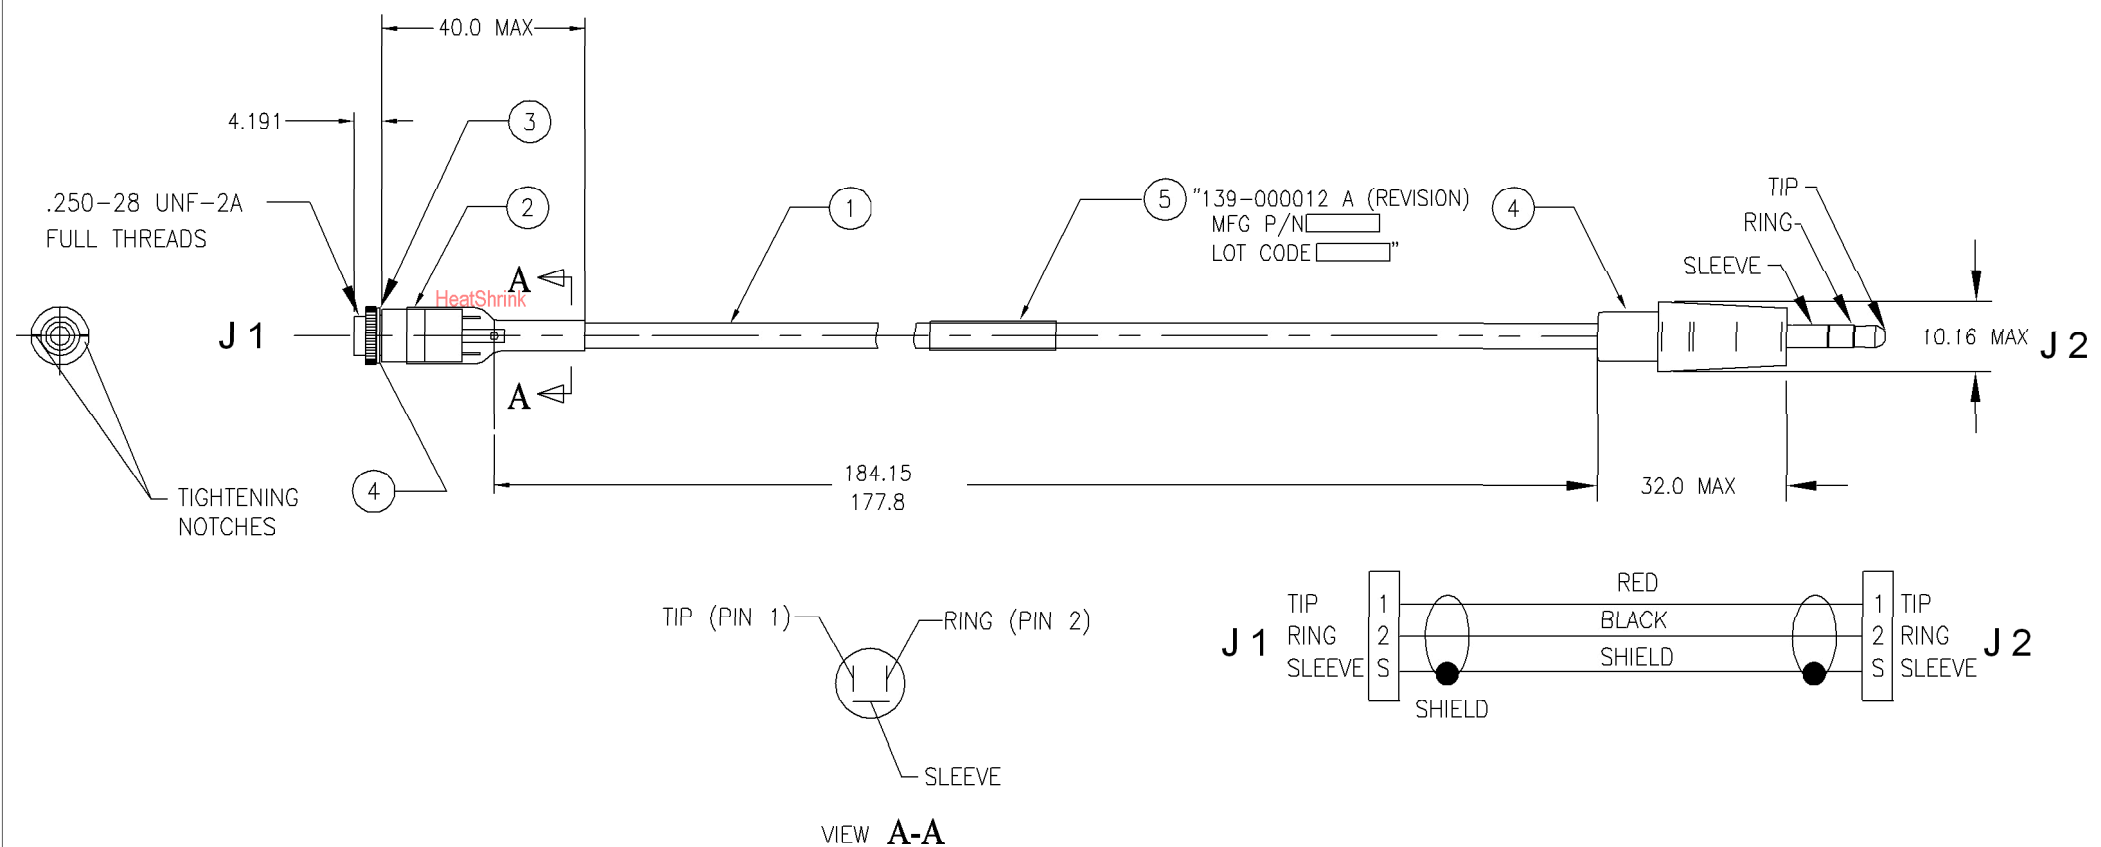

NOTES: UNLESS OTHERWISE SPECIFIED

- 1 ALL DIMENSIONS ARE "MM"
- 2. ANY OPEN, MISWIRING, SHORT AND INTERMITTENT ARE NOT PERMITTED.
- 3. INSULATION RESISTANCE: 20M OHMS/250V DC MIN
- 4. CABLE MIN BEND RADII TO BE 17MM

5	LABEL	1	CABLE IDENTIFICATION LABEL
4	STEREO PLUG	1	3.5MM STEREO PLUG WITH HeatShrink STRAIN RELIEF NICKEL-PLATED
3	LOCK WASHER	1	EXTERNAL TOOTH LOCK WASHER .023-.028 THICK
2	PANEL MT JACK	1	3.5MM STEREO PANEL MOUNT JACK WITH MOLDED STRAIN RELIEF
1	CABLE	1	#24 AWG 2C WITH DRAIN WIRE+AL/MYLAR O.D=Ø 3.63MM MAX, PVC JACKET COLOR: BLK
NO.	ITEM	QTY	DESCRIPTION

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE

.XXX ± .005
.XX ± .015
.X ± .030
DO NOT SCALE DRAWING

1

ANGULAR ± .1°

APPROVALS

DATE

DESIGN

J PIDKOWICZ

9/6/05

CHECKED

J.PIDKOWICZ

12/20/05

MFG

DATE

J WATKINS

12/20/05

DESIGN APPROVAL

H CREVE

12/20/05

CABLE AUDIO, STEREO

HO CHIEN

www.hochien.com

PN# CA-B5042-0014A

SIZE D

PRJ NO.

DWG NO.

139-000112

REV A

SCALE: TO FIT

SHEET 1 OF 1

RoHS