
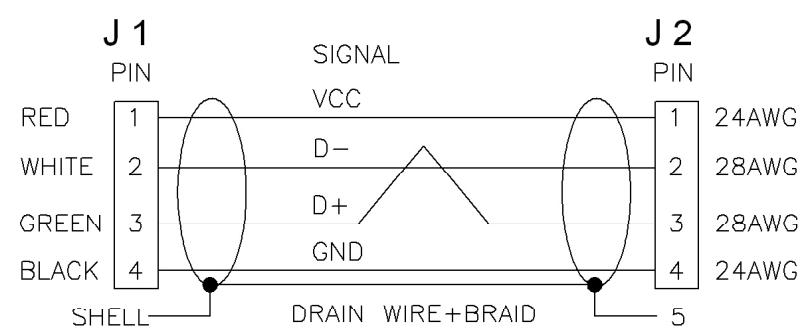


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
00	RELEASED IAW ECO	VOID	
01	REVISED IAW ECO BU377	2/20/06	JLP/DO
A	REVISED IAW ECO BU449	12/1/06	AL/JW/HC

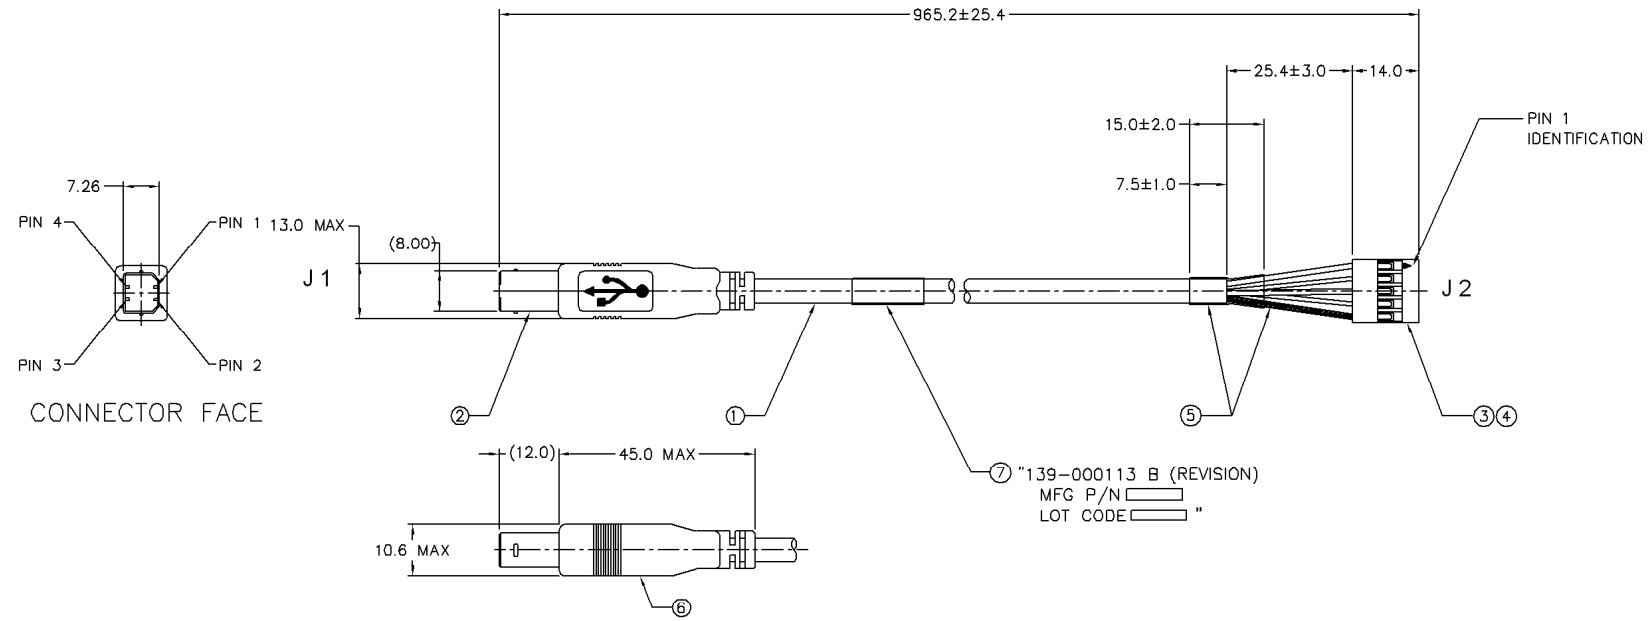

7	LABEL	1	CABLE IDENTIFICATION LABEL
6	OUTER MOLDED	8gm	PVC, SHORE A: 85±3, UL94V-0 COLOR: BLACK
5	H.S. TUBE	1	I.D=Ø5.0MM, UL224, L=15.0MM, COLOR: BLACK
5	H.S. TUBE	1	I.D=Ø1.5MM, UL224, L=30.0MM, COLOR: BLACK
4	CONTACT	5	COPPER ALY, GOLD FLASH, THICKNESS: 0.2MM WIRE RANGE: #22~#28.
3	5 PIN HOUSING	1	UL94V-1, COLOR: BLACK, PITCH: 2.54MM
2	USB 4 PIN MALE CONN. ("B" TYPE) (SOLDER TYPE)	1	CONTACT: 30u" GOLD PLATED INSULATOR: COLOR: PBT SHIELD CASE: NICKEL PLATED
1	CABLE	1	#28X1P+#24X2C+AL/MYLAR+DRAIN WIRE+BRAID COVERAGE: 65% MIN.+JACKET: PVC, UL2725 COLOR: BLACK, O.D=Ø4.5±0.1MM
No.	ITEM	QTY	DESCRIPTION

NOTES:

- ① ALL DIMENSIONS ARE "MM".
- ANY OPEN, MISWIRING, SHORT AND INTERMITTENT ARE NOT PERMITTED.
- CIRRIS 1000H OR EQUIVALENT CABLE TESTER USING FOLLOWING PARAMETERS:
INSULATION RESISTANCE: 300V DC, 10mS,
20M Ω MIN. CONTINUITY: 2.0 Ω MAX.
- CABLE MIN BEND RADII TO BE 15MM

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE ①
.XXX +- .005
.XX +- .015 ANGULAR +- .1°
.X +- .030
DO NOT SCALE DRAWING

MATERIAL
FINISH

APPROVALS		DATE
DRAWN	J PIDKOWICZ	09/06/05
CHECKED	J PIDKOWICZ	12/20/05
ENGR	J WATKINS	12/20/05
MGR	H CREVE	12/20/05

CABLE, USB PCBLED
TO MOTHERBOARD

HO CHIEN
www.hochien.com

PN# CA-B5042-0015

SIZE	PRJ NO.	DWG NO.	REV
C		139-000113	A
SCALE: NONE		SHEET 1 OF 1	

RoHS