



REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
00	RELEASED IAW ECO	VOID	HC
01	REVISED IAW ECO BU377	2/13/06	JLP/DJO
A	REVISED IAW ECO BU421	7/3/06	JLP/DJO
B	REVISED IAW BU449	12/1/06	AL/JW/HC

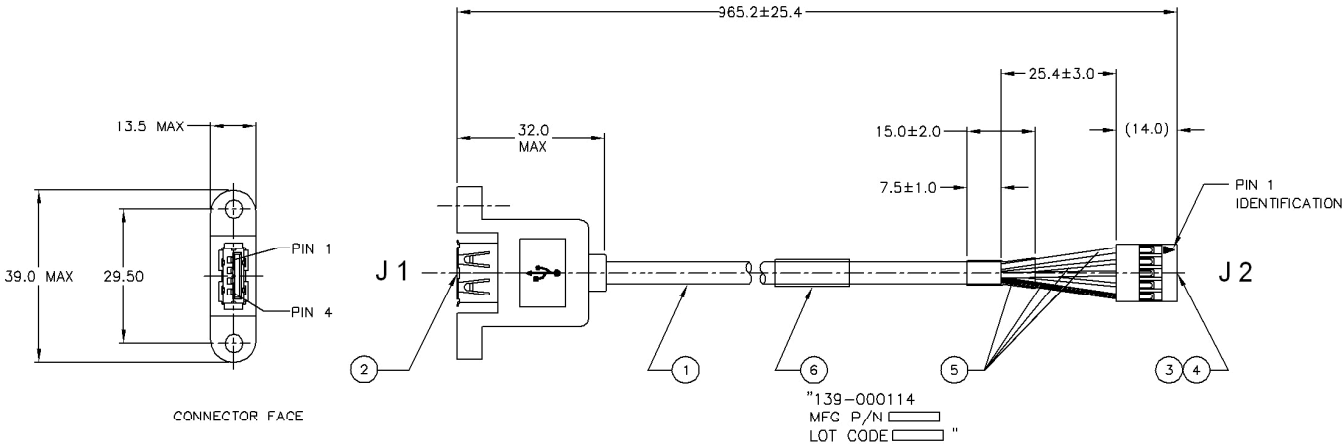

NOTES: UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS ARE "MM".
2. ANY OPEN, MISWIRING, SHORT & INTERMITTENT ARE NOT PERMITTED.
3. CIRRIIS 1000H OR EQUIVALENT CABLE TESTER USING FOLLOWING PARAMETERS:
300V DC, 10mS, 20M ΩMIN. & 2.0 ΩMAX.
4. CABLE MIN BEND RADII TO BE 7.6MM

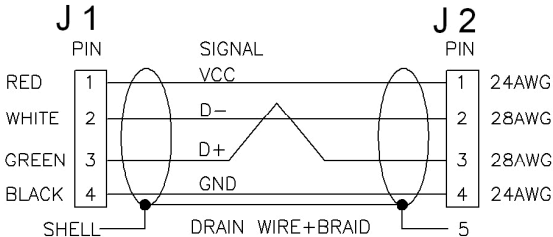

7	LABEL	1	CABLE IDENTIFICATION LABEL
5	H.S. TUBE	1	I.D=Ø5.0MM, UL224, L=15.0MM, COLOR: BLACK
		1	I.D=Ø1.5MM, UL224, L=30.0MM, COLOR: BLACK
4	CONTACT	5	COPPER ALY, GOLD FLASH, THICKNESS: 0.2MM WIRE RANGE: #22~#28.
3	5 PIN HOUSING	1	UL94V-1, COLOR: BLACK, PITCH: 2.54MM
2	USB 4 PIN MALE CONN. ("A" TYPE) (SOLDER TYPE)	1	CONTACT: 30u" GOLD PLATED INSULATOR: COLOR: PBT SHIELD CASE: NICKEL PLATED
1	CABLE	1	#28X1P+ #24X2C+AL/MYLAR+DRAIN WIRE+BRAID COVERAGE: 65% MIN.+JACKET: PVC, UL2725 COLOR: BLACK, O.D=Ø4.5±0.1MM
No.	ITEM	QTY	DESCRIPTION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE 1 .XXX +- .005 .XX +- .015 ANGULAR +- .1" .X +- .030 DO NOT SCALE DRAWING					CABLE, USB MOTHERBOARD TO CHASSIS			
	APPROVALS		DATE		HO CHIEN www.hochien.com			
	DRAWN J PIDKOWICZ		09/06/05		PN# CA-B5042-0016			
	CHECKED J PIDKOWICZ		12/20/05					
MATERIAL	ENGR J WATKINS		12/20/05		SIZE	PRJ NO.	DWG NO.	REV
FINISH	MGR H CREVE		12/20/05		C		139-000114	B
				SCALE: NONE		SHEET 1 OF 1		

RoHS