
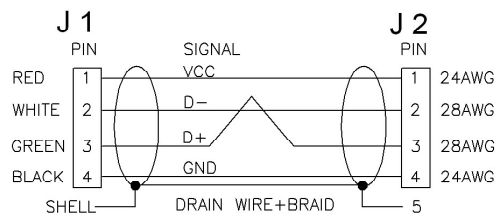


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
NC	RELEASED IAW ECO BU	X	X

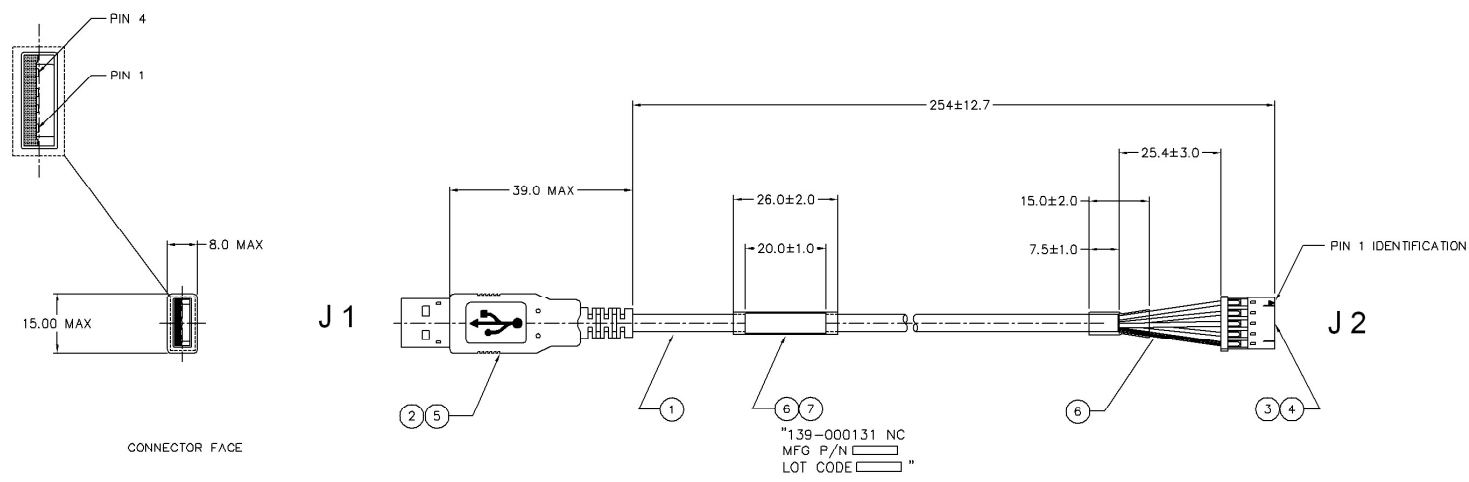

SPECIFICATION CONTROLLED

7	LABEL	1	W=20.0MM, L=18.0MM, CONTENT: SEE CHART
6	H.S. TUBE	1	I.D=Ø6.0MM, UL224, L=26.0MM, COLOR: CLEAR
		1	I.D=Ø1.5MM, UL224, L=27.40MM, COLOR: BLACK
5	OUTER MOLDED	A/R	PVC, SHORE A: 85±3, UL94V-0 COLOR: BLACK(600-BLK-001)
4	CONTACT	5	COPPER ALY, GOLD FLASH, THICKNESS: 0.2MM WIRE RANGE: #22~#28.
3	5 PIN HOUSING	1	UL94V-1, COLOR: BLACK, PITCH: 2.54MM
2	USB 4 PIN MALE CONN. ("A" TYPE) (SOLDER TYPE)	1	INSULATOR: THERMOPLASTIC, GLASS FILLED WITH COLOR: WHITE, UL94V-0 CONTACT: COPPER ALLOY, 30u" GOLD PLATED SHIELD CASE: COLD ROLLED STEEL, NICKEL PLATED COVER: FOR USB-A CONN., UL94V-0,
		1	#28X1P+ #24X2C+AL./MYLAR+DRAIN WIRE+BRAID COVERAGE: 65% MIN.+JACKET: PVC O.D=Ø4.8±0.1MM, COLOR: BLACK UL2725 & CSA II A/B FT1
1	USB 2.0 CABLE	1	
NO.	ITEM	QTY	DESCRIPTION

NOTES: UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS ARE "MM".
2. ANY OPEN, MISWIRING, SHORT & INTERMITTENT ARE NOT PERMITTED.
3. CIRRIIS 1000H OR EQUIVALENT CABLE TESTER USING FOLLOWING PARAMETERS:
300V DC, 10mS, 20M MIN. & 2.0 MAX.
4. CABLE MIN BEND RADII TO BE 7.6MM
5. DRAWING CANNOT BE CHANGED WITHOUT PRIOR HARRIS APPROVAL

RoHS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE		APPROVALS		DATE	
.XXX +- .005	1	DRAWN	J PIDKOWICZ	03/07/06	
.XX +- .015	ANGULAR +- .1°	CHECKED	J PIDKOWICZ	03/07/06	
.X +- .030	DO NOT SCALE DRAWING	ENGR	I LOZOVER	x	
MATERIAL		MGR	H CREVE	x	
FINISH					

HO CHIEN					
CABLE, USB-A					
PLUG TO AFTERBURNER3					
139-000131					
SIZE	PRJ NO.	DWG NO.	REV		
C		CA-B5042-0020	NC		
SCALE: NONE			SHEET	1 OF 1	