


REVISION HISTORY				
REV	DESCRIPTION	BY	DATE	APPROVED
NC	RELEASED IAW ECO BU X	JLP	X	X

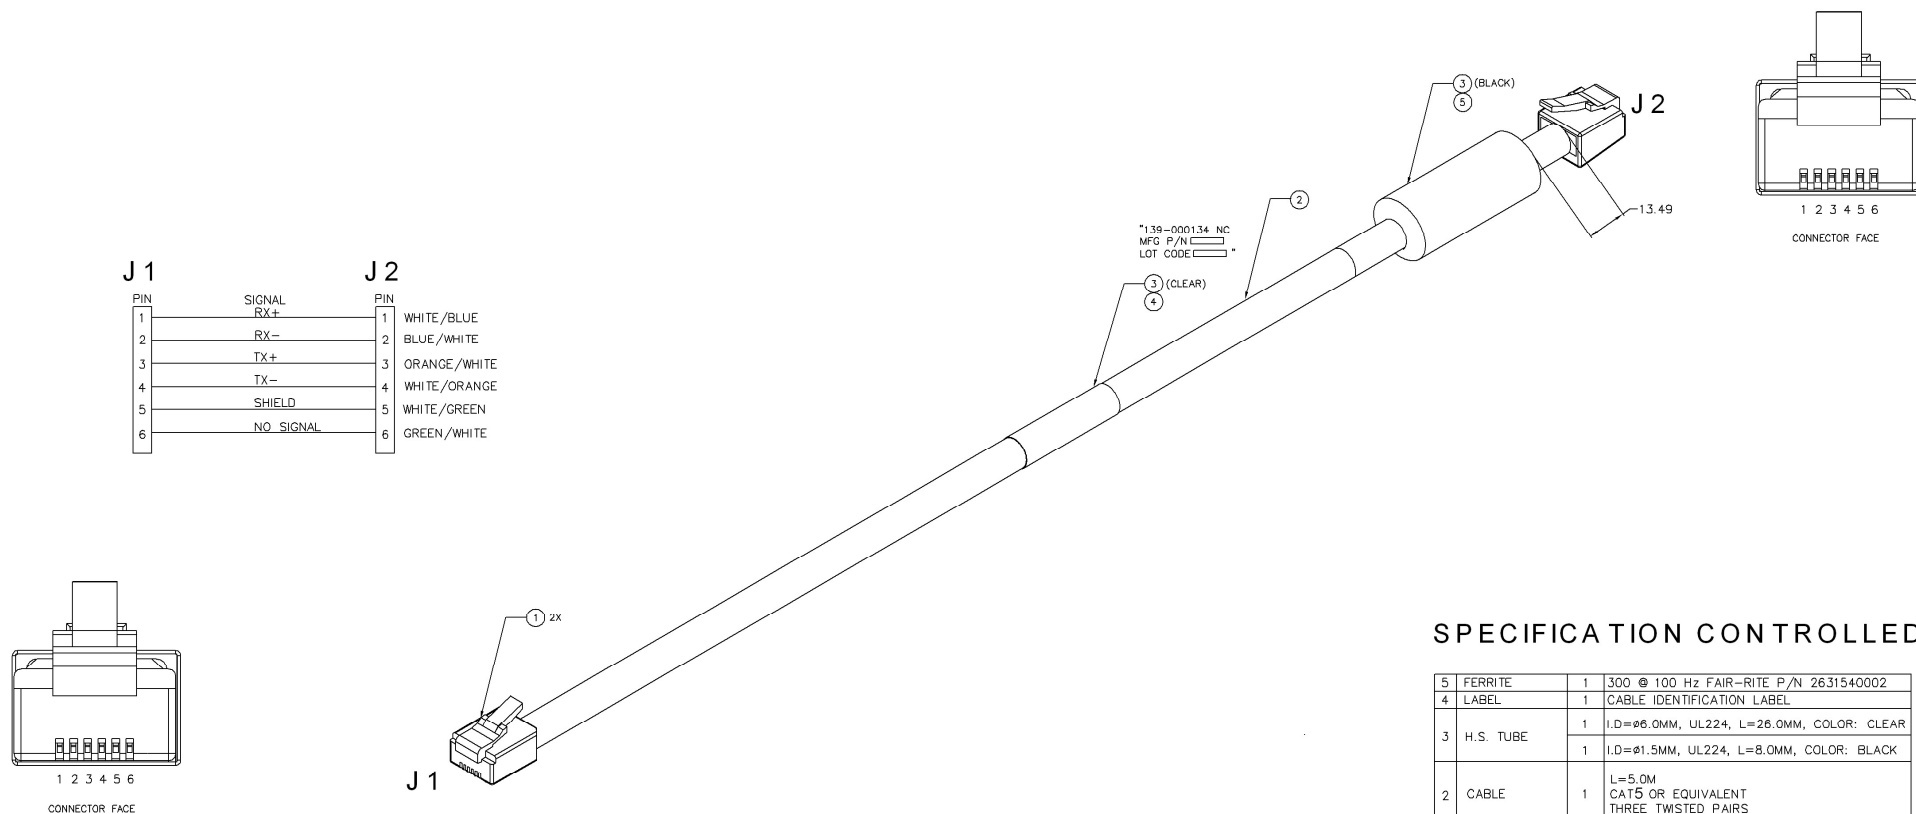

NOTES: UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS ARE "MM".
2. ANY OPEN, MISWIRING, SHORT & INTERMITTENT ARE NOT PERMITTED.
3. CABLE MIN BEND RADII TO BE 7.6MM
4. DRAWING CANNOT BE CHANGED WITHOUT PRIOR HARRIS APPROVAL

SPECIFICATION CONTROLLED

5	FERRITE	1	300 @ 100 Hz FAIR-RITE P/N 2631540002
4	LABEL	1	CABLE IDENTIFICATION LABEL
3	H.S. TUBE	1	I.D.=ø6.0MM, UL224, L=26.0MM, COLOR: CLEAR
		1	I.D.=ø1.5MM, UL224, L=8.0MM, COLOR: BLACK
2	CABLE	1	L=5.0M CAT5 OR EQUIVALENT THREE TWISTED PAIRS
1	RJ12 (6X6) MALE CONN.	2	CONTACT: COPPER ALLOY, GOLD FLASH
NO	ITEM	QTY	DESCRIPTION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		HO CHIEN	
.XXX = .005 .XX = .010 ANGRULAR = .1" .X = .030 NO MIT CHAM. ALLOWED	APPROVALS	DATE	
	DESIGN J. PIDKOWICZ	3/14/06	
	CHK X	X	
	APP X	X	
	BY X	X	
NOTES:			
	1. LOZOWER	3/14/06	
	2. H. GREVE		
SIZE	PRJ. NO.	DRG NO.	REV
D		CA-B5042-0023	
SCALE: NONE		SHEET 1 OF 1	