


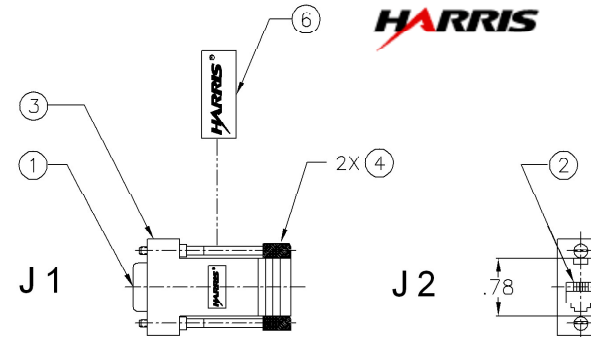


FACE OF CONNECTOR



FACE OF CONNECTOR

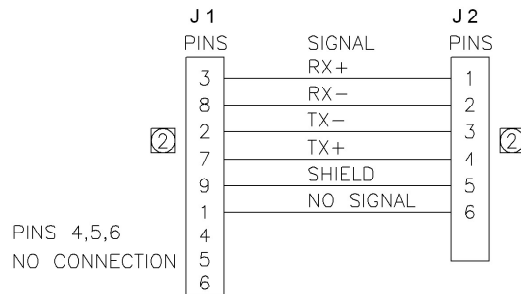

NOTES: UNLESS OTHERWISE SPECIFIED

1. ANY OPEN, MISWIRING, SHORT & INTERMITTENT ARE NOT PERMITTED.

- 2 HEATSHRINK ALL SOLDER CONNECTIONS

3. DRAWING MAY NOT BE CHANGED WITHOUT PRIOR APPROVAL FROM HARRIS

PRELIMINARY ONLY

SPECIFICATION CONTROLLED DRAWING

6	LABEL	1	HARRIS IDENTIFICATION
5	LABEL	1	PART NUMBER IDENTIFICATION
4	THUMBSCREW	2	4-40 UNC-2A MATERIAL: CRES
3	HOUSING	1	PLASTIC MOLD, ONE PIECE COLOR: BLACK
2	CONNECTOR	1	(6X6) RJ12 FEMALE CONTACT: COPPER ALLOY, GOLD FLASH
1	CONNECTOR	1	9 PIN D-SUB FEMALE CONTACT: GOLD FLASH WITH SOLDER TAIL INSULATOR: PBT, UL94V-0, COLOR: BLACK SHELL: NICKEL PLATED
NO.	ITEM	QTY	DESCRIPTION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TO FRACTIONS AND		HO CHIEN RJ12 TO DB9 ADAPTER TRIBUTARY, FEMALE 134-000/20	
.XXXX + .005 .XX + .015 ANGLEWAY + .1 .X + .030 DO NOT SCALE DRAWING	APPROVALS BY J. PILKOWICZ DATE 3/14/06 X X X X X X	SIZE D PRL NO. SCALE: NONE	DWG NO. CA-B5042-0024 SHEET 1 OF 1
TITLE DRAWN BY L. LOZOWER CHECKED BY H. CREVE	DATE 3/14/06		