

- Connector 1 : Comb D-Sub 17W5 Male, Power, 20A, Solder type
PN# 1120-15T0B
- Connector 2 : Comb D-Sub 17W5 Female, Power, 20A, Solder Type
PN# 1121-15T0B-2NA (6mm Nut mount front)
- Metal Hood : 3010-16-12MM <http://www.hochien.com/3010.htm>
with long thumb slotted screws - Male side only
PN# S018-1 <http://www.hochien.com/S018-1.pdf>


Wire: UL1015, 12 ~ 14WG/5C, UL1007, 24AWG/12C, Unshield
UL, 12 ~ 14AWG 5C on power contact
UL, 24AWG 12C on signal contact



Heat Shrink cable first than Braided Sleeving whole cable
Refer: Heyco Braided Sleeving, Black, part #8993, description #BS-500-FR
Spec: http://www.heyco.com/pages/products/section_4/4-18.html

100% Tested.

PIN#	Length
CA-B5042-0032C	24"
CA-B5042-0033C	66"

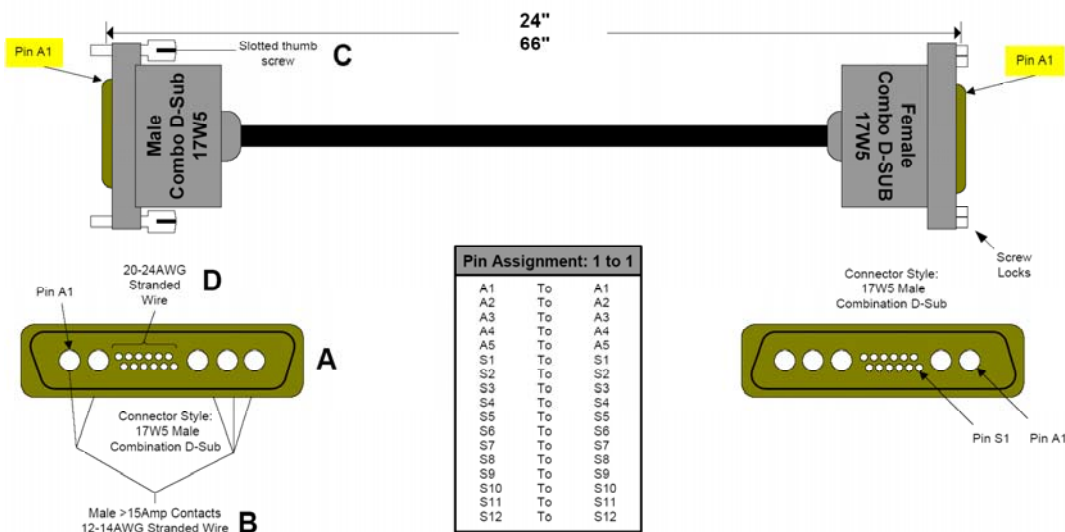

A	17W5, male, combo D-sub, solder cup, for cable mount.
B	Male, 20 amp power contacts for crimp. Wire: 24 or 66 inch Unshielded, insulated 12-14 AWG stranded wire
C	Slotted Thumb Screws
D	Wire: 24 or 66 inch unshielded, insulated 20-24 AWG stranded wire
Notes	→ Suggested Connectors MFG: connec. Ho-Chien → B ~24 Volt/15A 360W min power rating per power pin → Perform Electrical Test to verify connections. → ROHS Compliant