


Customer	ESP
Appv. Signature	
Appv. Date	

Item	Part	QTY.	Part No. & Remark
1	Housing	2	JST XHP-7
2	Contact	10	JST SXH-001T-P0.6
3	Cable 6C/22 AWG, 7/32 Strand	A/R	General Cable C4066 or Equiv.
4	Shrink Tube	2	Min. 25mm length as shown

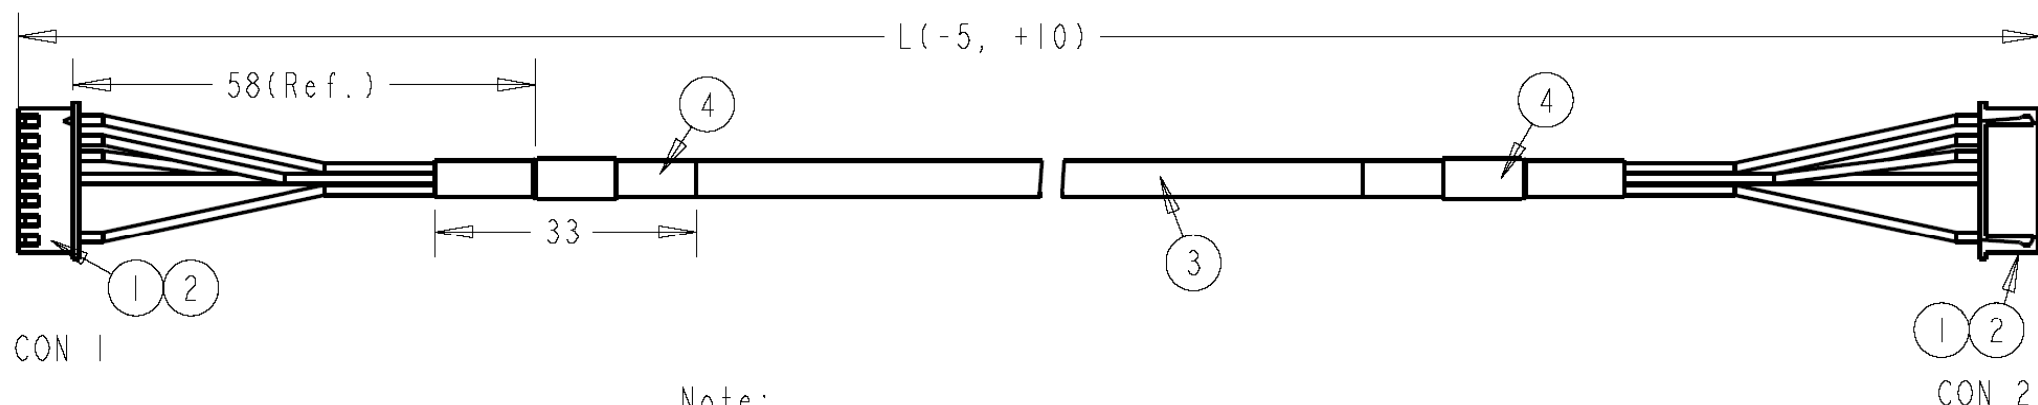


Note:

1. Use 22 AWG unshielded cable for all (Don't use Twisted pair);
2. Cut Brown (or Yellow) color wire;
3. Not use substitute part for JST connector;
4. All components including solder material should meet RoHS Compliance.

Wiring Table

CON 1	Wire Color	CON 2
Pin #1	White	Pin #1
Pin #2	Red	Pin #2
Pin #3	Green	Pin #3
Pin #4	Blue	Pin #4
Pin #5	N/C	Pin #5
Pin #6	N/C	Pin #6
Pin #7	Black	Pin #7

Rel.	4/6/07	Create a new NTC P/N	SX	CN
Rev	Date	Description	Req	Appd



3rd Angle Projection

Unless otherwise noted:
All linear tolerances
are -1, +2%.

UNIT
MM

Cable Assembly for GU3K

DRN	SX	Date	4/6/07	P/N:	CA-B6070-0181A_B
CHK'D	CN	Date	4/6/07	Project	Filename n/c 2 0027 1
APP'D	CN	Date	4/6/07	DRN No.	SHT OF

HO CHIEN
www.hochien.com

400	400 mm	NTC-02-0027-400	CA-B6070-0181B
300	300 mm	NIC-02-0027-300	CA-B6070-0181A
L	Length	NTC P/N	HO CHIEN PN#