


Customer	ESP
Appv. Signature	
Appv. Date	

Item	Part	QTY.	Part No. & Remarks
1	9 POS. Female D-Sub	1	Regal 4008-9 or Equiv.
2	Plastic D-Sub CVR 4/40SC	1	HD-9 or Equiv.
3	Housing	1	JST Housing XHP-7
4	Contact	5	SXH-001T-P0.6
5	Cable 6C/22 AWG, 7/30 Strand	A/R.	Geeral Cable C4066 or Equiv.
6	Shirnk Tube	1 IN.	

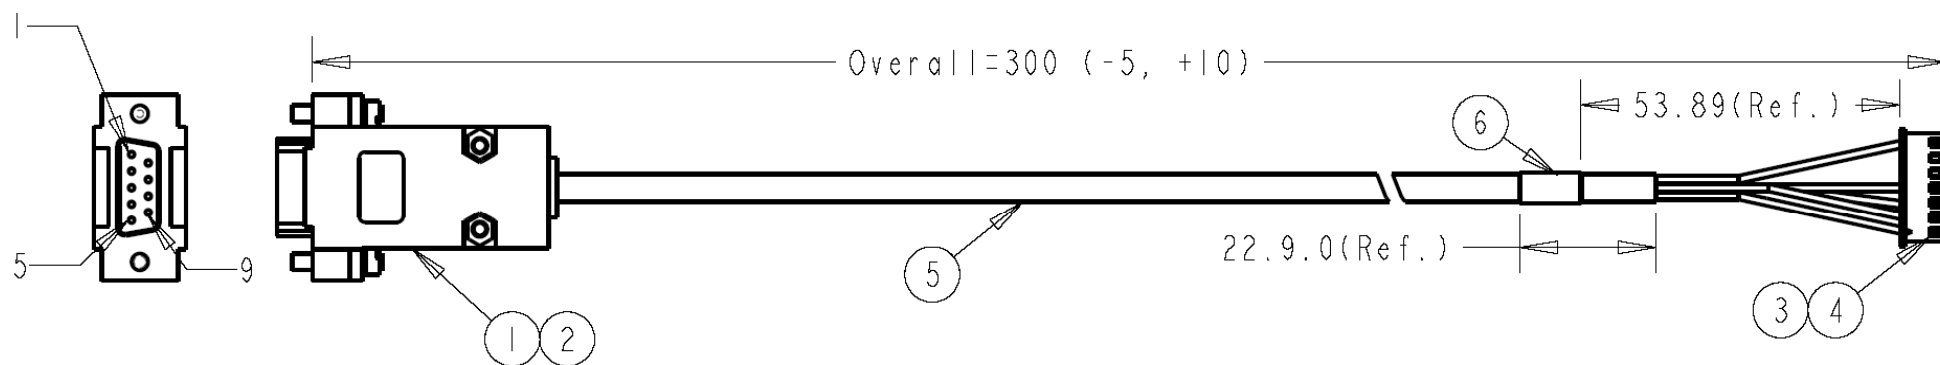


Note:

1. USE 22 AWG unshielded cable (Don't Use Twisted pair);
2. Cut Brown (or Yellow) color wire;
3. No substitute part for JST connector;
4. All components including solder material should meet RoHS Compliance.

WIRING TABLE:

DB 9 Side	Wire Color	JST 7 pin Side
Pin #3	Black	Pin #1
Pin #8	White	Pin #2
Pin #7	Red	Pin #3
Pin #2	Green	Pin #4
Pin #5	Blue	Pin #7
Pin #1	N/C	Pin #5
Pin #4	N/C	Pin #6
Pin #6	N/C	
Pin #9	N/C	

Rel.	4/6/07	Create a new NTC P/N	SX	CN
Rev.	Date	Description	Req.	Appd



3rd Angle Projection

Unless otherwise noted:
All linear tolerances
are -1, +2%.

UNIT MM

HO CHIEN
www.hochien.com

Cable for GU-3K, Divergence, and X port

DRN	SX	Date	4/06/07	P/N:	CA-B6070-0182
CHK'D	CN	Date	4/06/07	Project	Filename n/c 04 0012
APP'D	CN	Date	4/06/07	DRN No.	SHT OF