



# Disk Drive Power Connection System

- Used in 1822 series housing
- Applicable wires: AWG #26 ~ #20
- Insulation O.D.: .071" (1.8mm) max.
- UL File No.:E114003
- CSA File No.:LR86545

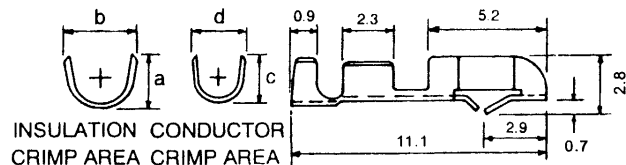

| Part No  | Dimension (mm) |     |     |     | Wire                     |                          | Terminal          |                 |            | Q'ty/Reel |
|----------|----------------|-----|-----|-----|--------------------------|--------------------------|-------------------|-----------------|------------|-----------|
|          | a              | b   | c   | d   | Accommodation<br>(# AWG) | Insulation<br>(O.D. MAX) | Thickness<br>(mm) | Material        | Finish     |           |
| 26T-6202 | 3.2            | 2.6 | 1.7 | 2.0 | #24 ~ #20                | φ 1.8mm                  | 0.2               | Brass           | Tin-plated | 8,000     |
| 26T-6502 |                |     |     |     |                          |                          |                   | Phosphor bronze |            |           |
| 26T-1202 | 2.6            | 2.3 | 1.7 | 2.0 | #26 ~ #22                | φ 1.58mm                 |                   | Brass           |            | 12,000    |
| 26T-1502 |                |     |     |     |                          |                          |                   | Phosphor bronze |            |           |

- Material: 94V-0 nylon
- 2-12 circuits available
- Standard color: white
- Accepts 26T series terminal
- Mates with 1823, 1824 series header
- UL File No.:E114003
- CSA File No.:LR86545

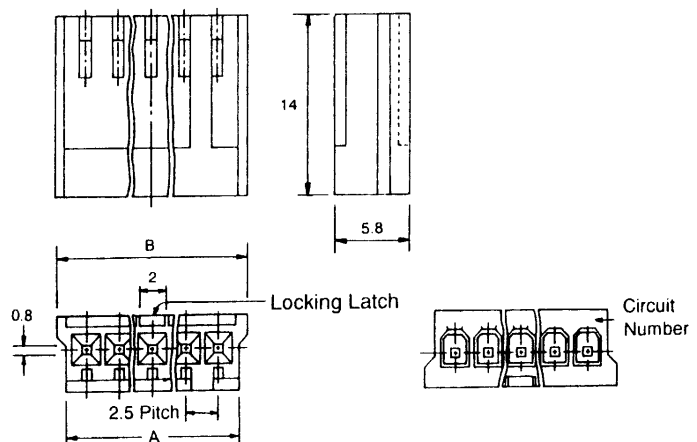

| Circuits | Dim. A      | Dim. B      | Circuits | Dim. A       | Dim. B        |
|----------|-------------|-------------|----------|--------------|---------------|
| 2        | .220 ( 5.6) | .272 ( 6.9) | 8        | .811 (20.6)  | .862 ( 21.9)  |
| 3        | .319 ( 8.1) | .370 ( 9.4) | 9        | .909 (23.1)  | .961 ( 24.4)  |
| 4        | .417 (10.6) | .469 (11.9) | 10       | 1.008 (25.6) | 1.079 ( 26.9) |
| 5        | .516 (13.1) | .567 (14.4) | 11       | 1.106 (28.1) | 1.157 ( 29.4) |
| 6        | .614 (15.6) | .665 (16.9) | 12       | 1.205 (30.6) | 1.256 ( 31.9) |
| 7        | .713 (18.1) | .764 (19.4) |          |              |               |