
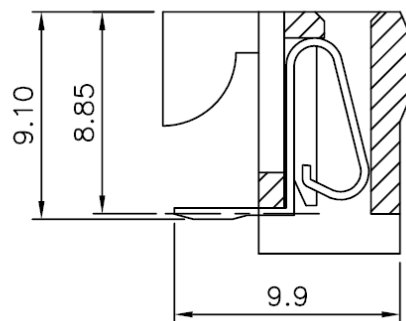
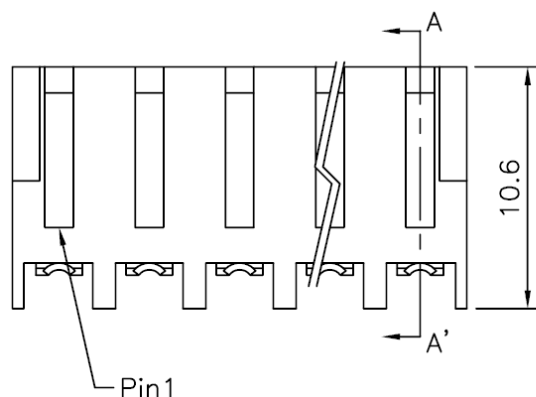
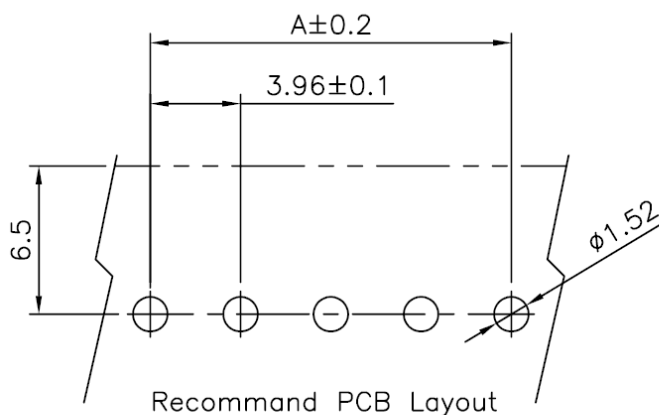


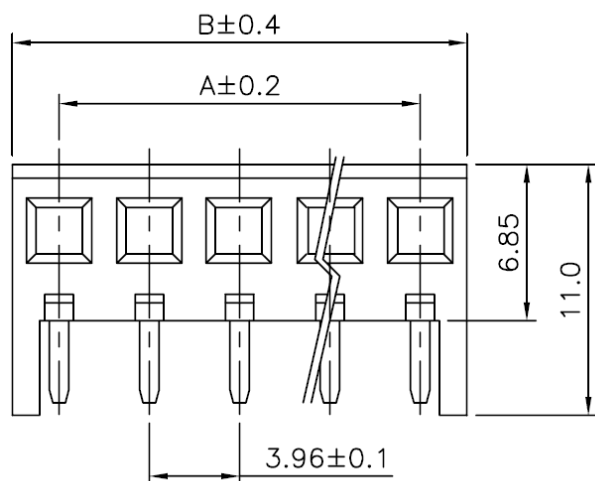

A-A' Section

SPECIFICATIONS

- Voltage Rating : 250 V AC/DC
- Current Rating : 5A AC/DC
- Withstanding Voltage : 1,500V AC/minute
- Insulation Resistance : 1,000M Ω min
- Temperature Range : - 24°C to + 105°C
- Contact Resistance : 20m Ω max

WAFER

- Part No. : JS-5017A-XXR
JS-5017A-XXR : GP Produces
- Poles : 2 - 20
- Material : Contact : Brass, Tin Plased
Base : Nylon 66 UL94V-2
- Q' ty : 1,000 pcs./Bag

Poles	Part No.	Dimensions(mm)	
		A	B
2	JS-5017A-02R	3.96	8.06
3	JS-5017A-03R	7.92	12.02
4	JS-5017A-04R	11.88	15.98
5	JS-5017A-05R	15.84	19.94
6	JS-5017A-06R	19.80	23.90
7	JS-5017A-07R	23.76	27.86
8	JS-5017A-08R	27.72	31.82
9	JS-5017A-09R	31.68	35.78
10	JS-5017A-10R	35.64	39.74
11	JS-5017A-11R	39.60	43.70
12	JS-5017A-12R	43.56	47.66
13	JS-5017A-13R	47.52	51.62
14	JS-5017A-14R	51.48	55.58
15	JS-5017A-15R	55.44	59.54
16	JS-5017A-16R	59.40	63.50
17	JS-5017A-17R	63.36	67.46
18	JS-5017A-18R	67.32	71.42
19	JS-5017A-19R	71.28	75.38
20	JS-5017A-20R	75.24	79.34

HO CHIEN
www.hochien.com

PART NO JS-5017A-XXR

3.96mm Top/Side/Bottom Entry Type Wafer

APPROVED BY	SCALE	UNIT	TOLERANCE	LTR	REVISION RECORD	DATE	LTR	REVISION RECORD	DATE
林陳鏢	3:1	mm	.0 ±0.3	ECR	RoHS Compliant	07/01/04			
CHECKED BY	PROJ	VER NO.	.00 ±0.2						
			.000 ±0.1						
DRAWN BY	DATE	SIZE	ALL ±						
余秀麗	2005/05/15	A4	ANGLE						
			0° ±						
			.0° ±						

CUSTOMER

Conforms to The RoHS Instruction