
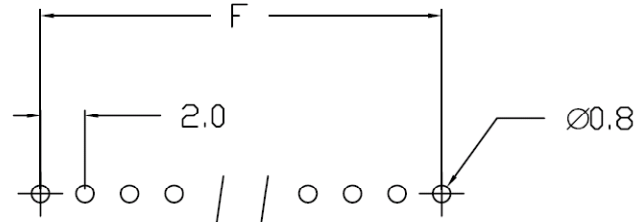




REVISION	DESCREPTION	DATE	APPD
0	SET UP	MAR/29/2007	C.Y.LIN

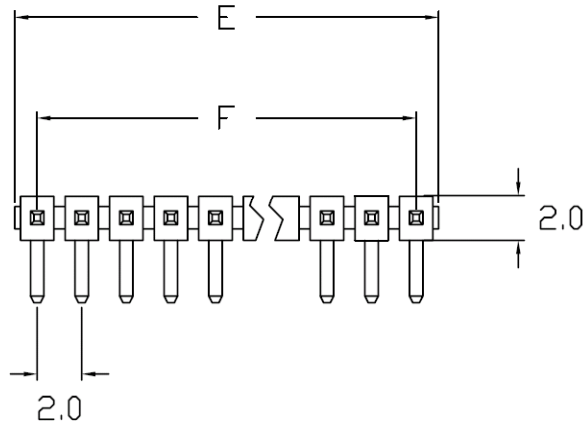

P.C.Board Layout

2525 - 1 x □ □ - 9.8

NO. OF CONTACT 2 ~ 40 pos
CONTACT PLATING G=Gold plated
 T=Tin plated
PIN LENGTH * Black color only

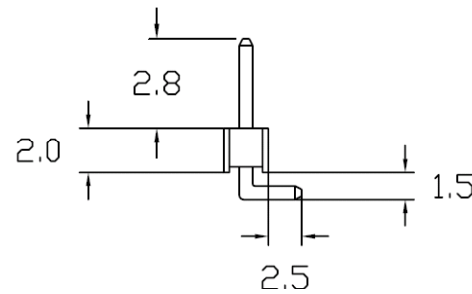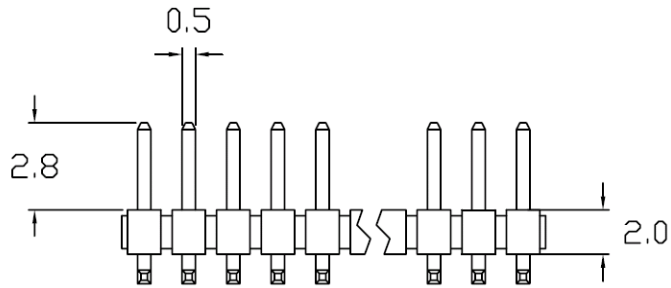

Dimension (mm)		2 to 40 pos. avail. per row
Tolerance : ±0.2		
E	2.00 x No. of position per Row	
F	2.00 x No. of position per Row - 2.00	

MATERIAL & ELECTRICAL
 INSULATOR : Nylon 6T UL 94-V0
 CONTACT : Brass
 CURRENT RATING : 1 Amp
 CONTACT RESISTANCE : 20mΩ Max. at 100mA DC
 INSULATOR RESISTANCE : 500MΩ Min. at 500V DC
 TEMPERATURE : -55°C ~ +105°C

 **HO CHIEN ENTERPRISE CO. LTD**

TITLE: 2.00mm CENTER UN-SHROUDED HEADER STRIP; RIGHT ANGLE

DR: RON CHEN	CHK: J.T,CHEN	APPD: C.Y.LIN	PAGE: 1 OF 1	HO CHIEN P/N. 2525 -1x □ □ -9.8
--------------	---------------	---------------	--------------	---------------------------------