

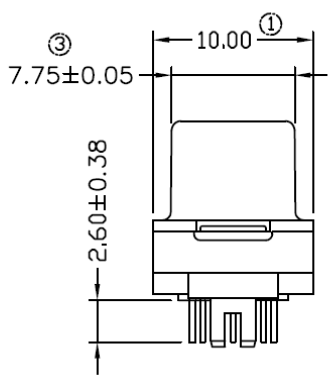
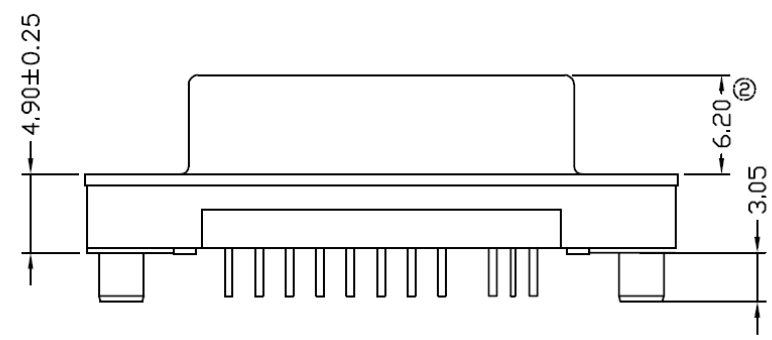


REV.	NOTES	DATE
A	RELEASED	2004/04/08
B	① 4.90 ⇨ 5.00, 9.80 ⇨ 10.00	2004/07/15
C	② 36.80±0.15 ⇨ 37.00±0.15, 6.30 ⇨ 6.20	2004/07/20
D	③ 7.70 ⇨ 7.55±0.05	2005/02/28
E	增加料號:AVI+40245-28B0	2005/07/23
F	增加料號:AVI+40241-28B9	2006/04/23
G	額定電流為3.0 A	2006/12/08

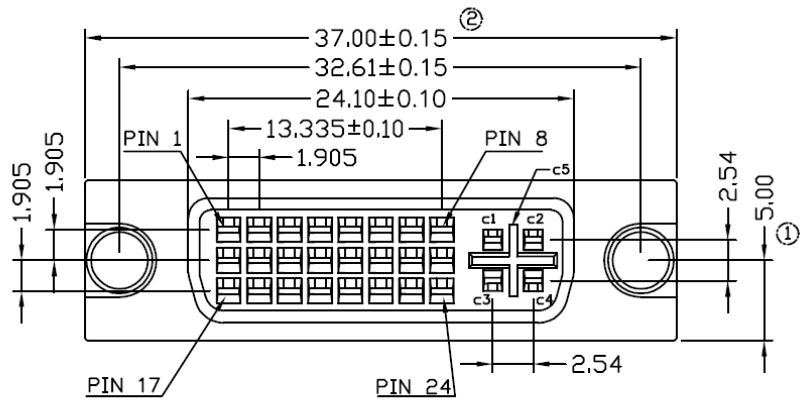

NOTES:
1.MATERIALS:
INSULATOR: GLASS FIBER REINFORCED THERMOPLASTIC LCP UL94V-0,
CONTACT: PHOSPHOR BRONZE, GOLD FLASH ON CONTACT, TIN PLATED ON TAIL 100u", OVER NICKEL PLATED 50u",
SHELL: ZINC ALLOY NICKEL PLATED.
2.ELECTRICAL:
INSULATION RESISTANCE: 1000 MEGOHMS MINIMUM
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
VOLTAGE RATING: 40 VOLTS AC(RMS) MAXIMUM
CURRENT RATING: 3.0 AMPS PER CIRCUIT
CONTACT RESISTANCE: 20 MILLIOHMS MAXIMUM
3.MECHANICAL PERFORMANCE:
INSERTION FORCES: 4.5kgf MAXIMUM
WITHDRAWAL FORCES: 1kgf MINIMUM, 4kgf MAXIMUM
DURABILITY: 100 CYCLES MINIMUM
4.ENVIRONMENTAL:
TEMPERATURE RANGE: -20°C TO +85°C

Patr No.	Insulator Color	
AVI+40245-28B0	BIEGE	W/O SCREW
AVI+40241-28B9	BIEGE	W SCREW

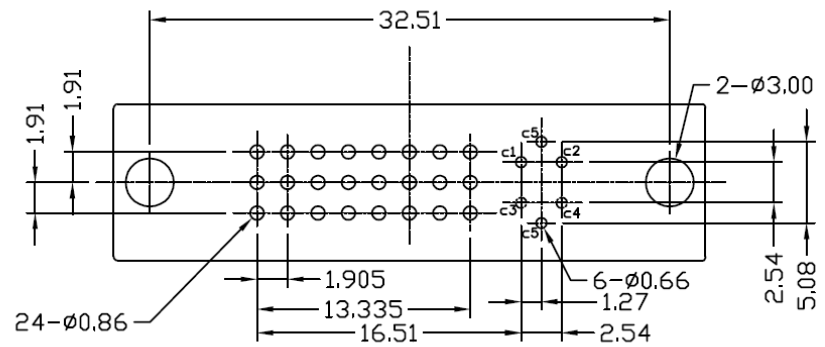

PCB LAYOUT (BOTTOM VIEW)TOLARANCE:±0.05

單位(UNITS)	mm
數量(QT'Y)	N/A
材料(MT'L)	SEE NOTE
處理(FINISH)	SEE NOTE

DIMENSIONS TOLERANCE
METRIC
.0= ±.20
.00= ±.10
.000= ±.05
.0000= ±
ANG.= ± 2°

繪圖(DRAW)	
設計(DE'N)	
審校(CH'K)	
核准(APP'D)	

HO CHIENT

www.hochien.com

圖名(NAME)

DVI 24+5 180度母座BC

料號(PART NUMBER)

AVI-40245-28B0

圖號(DRAW NUMBER)

RAVI4024528B0

圖檔(FILE NAME ,DWG)

E:GCT/A/VI

比例(SCALE)

1/1

圖紙(SIZE)

A4

頁次(SHEET)

1

版次(REV.)

G