


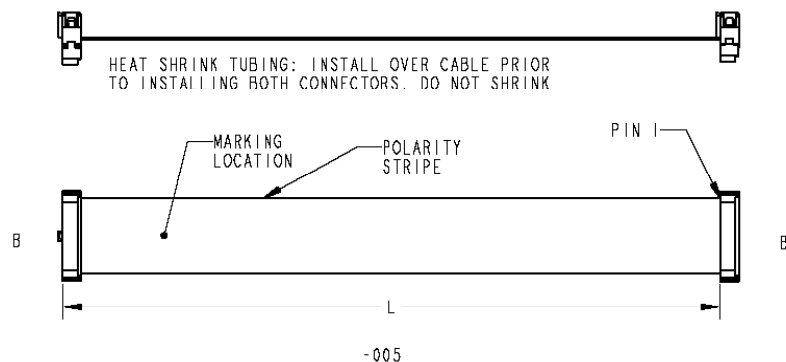

POWERWARE P/N	LENGTH L±0.25"	APPROVED VENDOR HO-CHEN
152601951-001	5.0	CA-C1267-0001
152601951-002	9.0	CA-C1267-0002A
152601951-003	9.0	CA-C1267-0003
152601951-004	6.0	CA-C1267-0004
152601951-005	22.0	CA-C1267-0009A
152601951-006	33.0	CA-C1267-0008A
152601951-007	28.0	CA-C1267-0002B

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL/COMPONENT SHALL MEET ROHS REGULATIONS PER EATON POWER QUALITY SPECIFICATION (164080496).
2. BULK PACKAGING SHALL INDICATE CONTENTS ARE ROHS COMPLIANT.
3. DOCUMENTATION INDICATING MATERIAL/COMPONENT IS ROHS COMPLIANT (CERTIFICATE OF COMPLIANCE, MATERIAL ANALYSIS, ETC) SHALL BE AVAILABLE UPON REQUEST.

DESCRIPTION: X-SLOT RIBBON CABLE

SPECIFICATIONS:



FERRITE: (-002, -004, & -007 ONLY) D.M. STEWARD 28B0686-200H, FERRICO F5-RH-17.5X28.5X9.5

HEAT SHRINK TUBING: (-002, -003, -005, & -007 ONLY) POLYOLEFIN, 600V, UL & CSA APPROVED

MARKING: COMPLETE ASSEMBLY TO BE PERMANENTLY MARKED WITH POWERWARE P/N AND REV. LEVEL. LOCATION AS SHOWN.


CONNECTOR SPECIFICATIONS		
DESCRIPTION	PCB EDGE CONNECTOR	FEMALE SOCKET TRANSITION W/ STRAIN RELIEF
CONNECTOR I.D.	A	B
HOUSING MATERIAL	PBT	PBT
CONTACT MATERIAL	PHOSPHOR BRONZE	PHOSPHOR BRONZE
CONTACT PLATING	GOLD OVER NICKEL	GOLD OVER NICKEL
# OF CONTACTS	20	20

CABLE SPECIFICATIONS	
DESCRIPTION	RIBBON CABLE
# OF CONDUCTORS	20
WIRE GAGE (AWG)	#28
INSULATION	PVC
VOLTAGE RATING	300V
TEMPERATURE RATING	105°C
FLAMMABILITY RATING	VW-1
AGENCY APPROVAL	UL, CSA

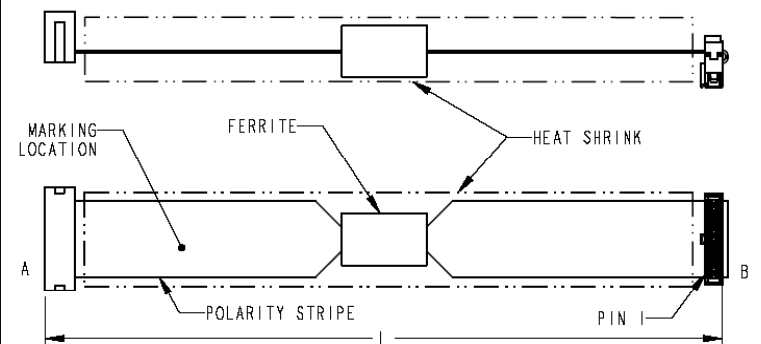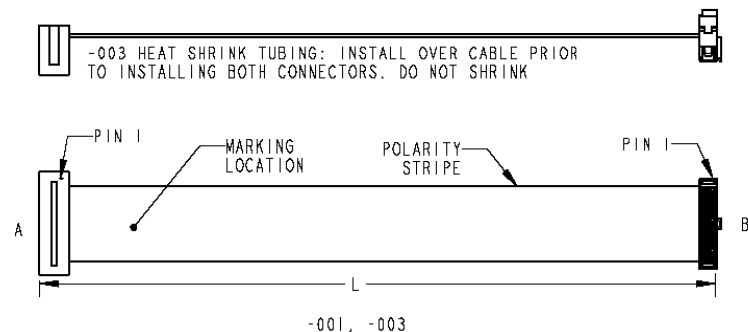

INSTALL HEAT SHRINK TUBING OVER CABLE AND FERRITE PRIOR TO INSTALLING BOTH CONNECTORS. DO NOT SHRINK.

-006 (NO FERRITE, NO HEAT SHRINK)

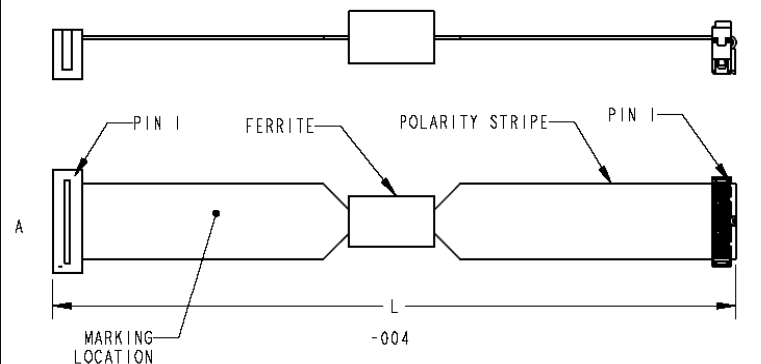

METRIC



HO CHEN

SIZE: C

DESCRIPTION: CABLE ASSY RIBBON X-SLOT

MODIFIED BY: M. CARNES

DATE: 15-JAN-2009

ECO: 0006361

STATE: RELEASED

PRO-ENGINEER GENERATED

UNLESS OTHERWISE SPECIFIED TOLERANCES ON DIMENSIONS ARE:
 ANGLES: ±1/2°
 HOLES: ±0.13
 DECIMALS: 0.X: ±0.75 X, 1 FOR X < 3: ±1
 DIMENSIONS ARE IN MILLIMETERS (INCHES) AND AFTER PLATING

PART NAME: 152601951

REVISION: 4

SCALE: 0.250
 DO NOT SCALE
 DRAWING OR
 CHANGE MANUALLY
 SHEET: 1 OF 1