

PCB LAYOUT
(Top View)

SPECIFICATION

1. Electrical Char.

Insulation Resistance : 500M-Ohm Min.
 Contact Resistance : 20milli-Ohm Max.
 Rating Current : 1.5A Max.
 Rating Voltage : 120V AC.
 Dielectric Voltage : 1,000 Vrms 60 Sec. Min.


2. Physical char.

Housing : Nylon (UL 94V-0)
 Color : Black Color
 Spring Wire : 0.35mm Thickness Phosphor Bronze
 Gold Plating Over Nickel
 Temperature Range : - 25 /+90 Deg C
 Durability : 500 Mating cycles Min.

3. LED fillings.

Forward DC Current : 2 mA
 Forward Voltage : 1.8 Volts Typical
 Reverse Voltage : 5 Volts Min.

HC 068SH 8 F X B4 N1 XX

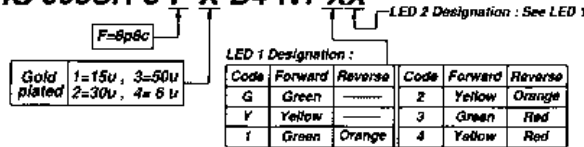

HO CHIEN

www.hochien.com

TITLE

RJ45 Side Entry PCB Jack With LED
 UL & CUL FILE NO. E131820

MODULAR JACKS ASSY FOR
 HC 068SH 8 F X B4 N1 XX

SCALE SIZE DWG. NO. 9768S-8L SERIES

DWG. NO.

AS068008

| NOT SCALED DRAWING | TOLERANCE UNLESS OTHERWISE NOTICE | INCH | MM | DR. | DATE |
|----------------------------|--------------------------------------|------------|------------------------------------|----------------|------------|
| THIRD ANGLE PROJECTION | LINEAR | MM INCH | 00±0.01 000±0.005 0000±0.002 | Steven | AUG-18 '04 |
| | ANGLE | °/30' | RADIAL | +0.45 -0.15 | Johnn |
| | | | | Billy | AUG-18 '04 |