

HO CHIEN



.079"(2.0mm) Crimp Terminal Housing

Specifications:

- Current rating: 3A AC, DC
- Voltage rating: 250V AC, DC
- Withstanding voltage: 800V AC/minute
- Insulation resistance: 1000M Ω min.
- Contact resistance: Initial value / 10m Ω max.
After environmental testing / 20m Ω max.
- Temperature rise: -25 $^{\circ}$ C ~ 85 $^{\circ}$ C max.
(including temperature rise)

HCA2025T Series Crimp Terminal

- Material: Phosphor bronze
- Finished: Tin-plated
- Used in 2026-N series housing
- Wire range: AWG #22 ~ #28
- Thickness: 0.2mm
- UL file No.:E114003

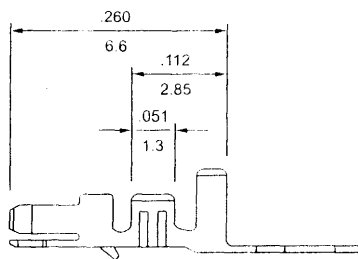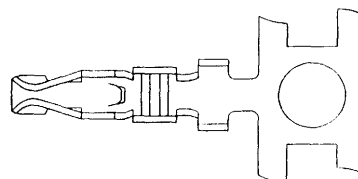


Ordering Information

Part No.	Wire size
2025T1	#24 ~ #28 AWG
2025T2	#22 ~ #26 AWG

HCA2026-N Series Crimp Terminal Housing

- 10 ~ 32 circuits available
- Material: Nylon 66, UL 94V-0
- Standard color: White
- Accepts 2025T terminal
- Mates with ALEX 2027, 2028 series headers
- UL file No.:E114003

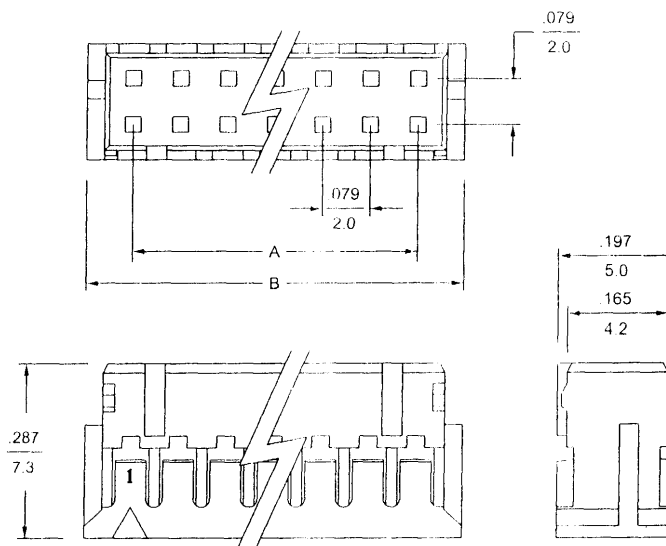

Dimensional Information - in (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
10	0.315 (8.0)	0.469 (11.9)	18	0.630 (16.0)	0.783 (19.9)	26	0.945 (24.0)	1.098 (27.9)
12	0.394 (10.0)	0.547 (13.9)	20	0.709 (18.0)	0.862 (21.9)	28	1.024 (26.0)	1.177 (29.9)
14	0.472 (12.0)	0.626 (15.9)	22	0.787 (20.0)	0.941 (23.9)	30	1.102 (28.0)	1.256 (31.9)
16	0.551 (14.0)	0.705 (17.9)	24	0.866 (22.0)	1.020 (25.9)	32	1.181 (30.0)	1.335 (33.9)