



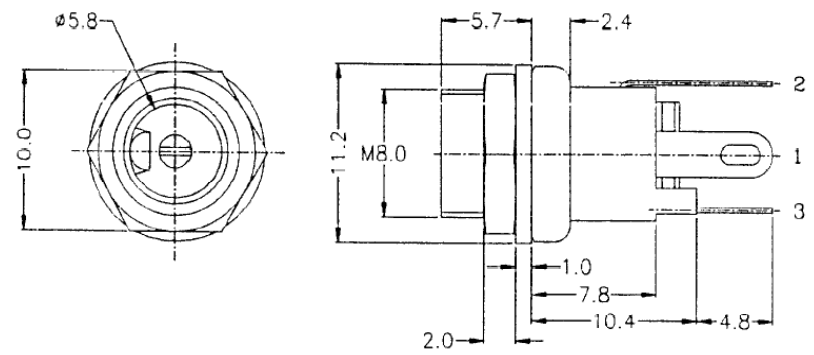

NOTE I

MATERIAL

- Pin Contact: Copper
- Break Terminal: Brass
- Sleeve Spring: Phosphor Bronze
- Pin Terminal: Brass
- Contact Plating: 0.00381mm [.000150"] Tin over .00127mm [.00005"] nickel
- Housing: PBT and 15% Glass Fiber reinforced UL 94-V0



NOTE II

ELECTRICAL PERFORMANCE

- Current Rating: 1 Amp
- Dielectric Strength: 500V AC for one minute
- Insulator resistance: 100 Megohms Min @ 500 DC
- Contact resistance: 30 Milliohms Max

PART NUMBER		
SCD-026		
MATERIAL	DR	HO CHIEN
	CHK	
ELECTRICAL PERFORMANCE	APPD	DC POWER JACK CENTER PIN DIA. 2mm
	APPD	
UNIT mm	SCALE	WEIGHT
THIS DRAWING IS A CONTROLLED DOCUMENT OF HO CHIEN ENTERPRISE CO. LTD. IT IS SUBJECT TO CHANGE		PAGE 1 OF 1
		HO CHIEN P/N NO. SCD-026