


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	JST-SHDR-20V-S-B		1
2	JST-SSH-003GA-P0.2		20
3	875681063		2

28AWG
PVC or Teflon
insulation
wire 2-20 can
be same color

28AWG
PVC or Teflon
insulation
wire, pin 1 different
color from 2-20.

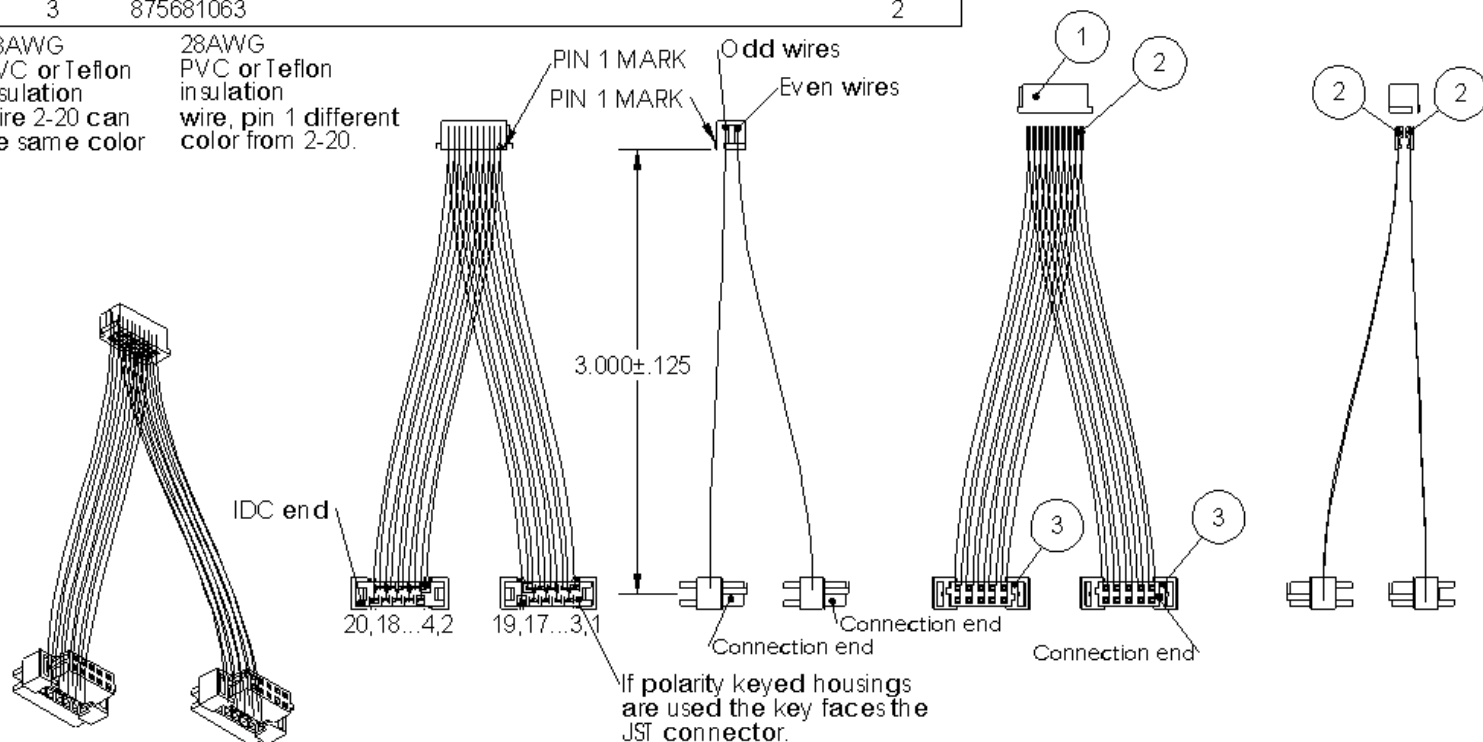

If polarity keyed housings
are used the key faces the
JST connector.

PROPRIETARY AND CONFIDENTIAL
THIS INFORMATION IS CONTAINED HEREIN
UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL 1/64
ANGULAR MAX 1/2 BEND ±
TWO PLACE DECIMAL ±0.01
THREE PLACE DECIMAL ±0.005
FOUR PLACE DECIMAL ±0.001
MATERIAL
FINISH
APPLICATOR
DO NOT SCALE DRAWING

		UNLESS OTHERWISE SPECIFIED:		NAME		DATE		TITLE:	
		DIMENSIONS ARE IN INCHES		DRAWN				Printer Cable ASSY	
		TOLERANCES:		CHECKED					
		FRACTIONAL 1/64		ENG APPR.					
		ANGULAR MAX 1/2 BEND ±		MFG APPR.					
		TWO PLACE DECIMAL ±0.01		Q.A.					
		THREE PLACE DECIMAL ±0.005		COMMENTS:					
		FOUR PLACE DECIMAL ±0.001							
		MATERIAL							
		FINISH							
		APPLICATOR							
		DO NOT SCALE DRAWING							

HO CHIEN
www.hochien.com

SIZE A	DWG. NO. CA-C5063-0001	REV
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1