

Features:

- 10 ~ 32 circuits available
- Contact: Tin-plated brass
- Insulation: Nylon 66, UL 94V-0
- Standard color: Nature
- Mates with ALEX 2026-N series housing


Specifications:

- Current rating: 3A AC, DC
- Voltage rating: 250V AC, DC
- Contact resistance: Initial value/10m Ω max.
After environmental testing/20m Ω max.
- Insulation resistance: 1000M Ω min.
- Withstanding voltage: 800V AC/minute
- Temperature rise: -25°C ~ 85°C max.
(including temperature rise)

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
10	8.0	12.0	18	16.0	20.0	26	24.0	28.0
12	10.0	14.0	20	18.0	22.0	28	26.0	30.0
14	12.0	16.0	22	20.0	24.0	30	28.0	32.0
16	14.0	18.0	24	22.0	26.0	32	30.0	34.0

Rev.	DESCRIPTION	DATE	APPD.

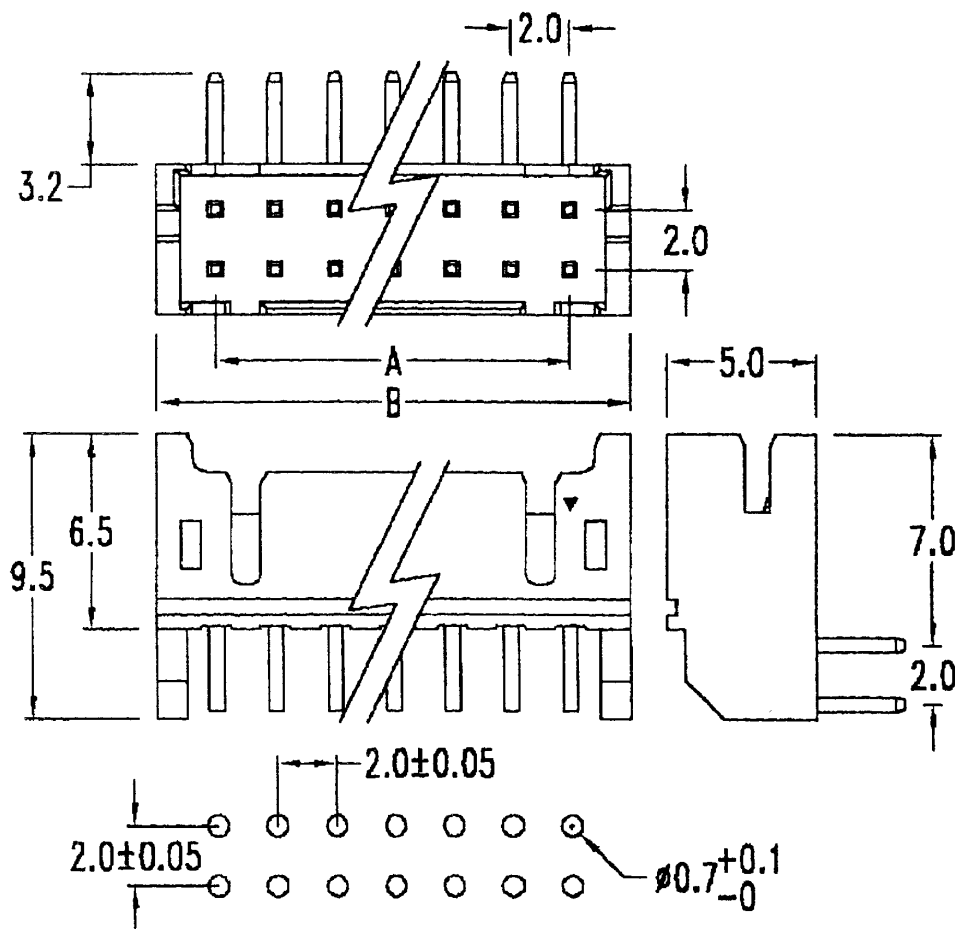

P.C. board hole dimensions

CUSTOMER APPROVAL

UNLESS OTHERWISE
SPECIFIED TOLERANCE

.000 ± 0.05 (mm)

.00 ± 0.15 (mm)

.0 ± 0.25 (mm)

UNIT:mm

Material:

Finish:

Q'ty:

APPROVAL

DRAWN: 劉桂伊

DESIGNED: 林玉梅

CHECKED: 林泰克

APPROVED: 劉俊銘

DATE

2000
10/26

2000
10/26

2000
10/26

2000
10/26

HO CHIEN

www.hochien.com

TITLE: .079"(2.0mm) Right Angle Headers

P/N: HCA2028-N

Eng. No.: 2028W-xx0000