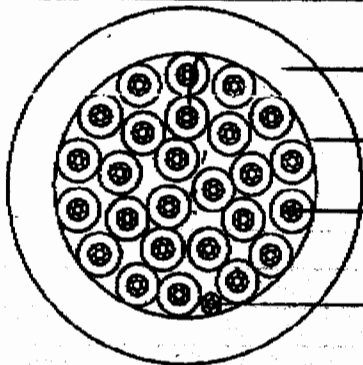


SPECIFCATION		UL2464 26AWG/26C+DW+AL/MY+Jacket		CROSS SECTION	
ITEM		SPECIFICATION			
CONDUCTOR	AWG	26AWG			
	MATERIAL	TINNED COPPER			
	COND.SIZE	7/0.16mm			
INSULATION	AVG.THICK	0.26mm			
	MATERIAL	SR-PVC			
	OD	1.00±0.05mm			
DRAIN	MATERIAL	TINNED COPPER			
	COND.SIZE	7/0.16mm			
SHIELD	MATERIAL	AL/MYLAR (Face inside)			
	COVERAGE	100%			
	OVERLAP	25%			
JACKET	AVG.THICK	0.86mm			
	MATERIAL	80℃ 70P/PVC			
	COLOR	GRAY/HALF MATT (CUL09002) (GY22)			
	OD	8.00±0.20mm			
TO:仲東工程 钟R FM:慶龍工程				COLOR CODE	
				26AWG/26C: 1.BLACK 2.BROWN 3.RED 4.ORANGE 5.YELLOW 6.GREEN 7.BLUE 8.PURPLE 9.GRAY10.WHITE 11.PINK 12.LHGT GREEN 13.LIGHT BLUE 14.RED/BLACK15.BROWN/BLACK 16.ORANGE/BLACK 17.YELLOW/BLACK 18.GREEN/BLACK 19.BLUE/BLACK 20.PURPLE/BLACK 21.GRAY/BLACK 22.WHITE/BLACK 23.PINK/BLACK 24.LIGHT GREEN/BLACK 25.LIGHT LBUE/BLACK 26.BLACK/WHITE	
				MARKING	
				E238846  AWM 2464 26AWG 80℃ 300V VW-1 CHINGLUNG	
				PRINTING COLOR	
				BLACK	
				APPROVED	
				CUSTOMER	
				CHECKED	
				P.NO.	
DRAWING					
DATE					
19-Jul-06					