


Riveted Open Hex Nuts of
#4-40 UNC


REVISION	DESCREPTION	DATE	APPD
0	SET UP	JAN/12/2007	C.Y.LIN

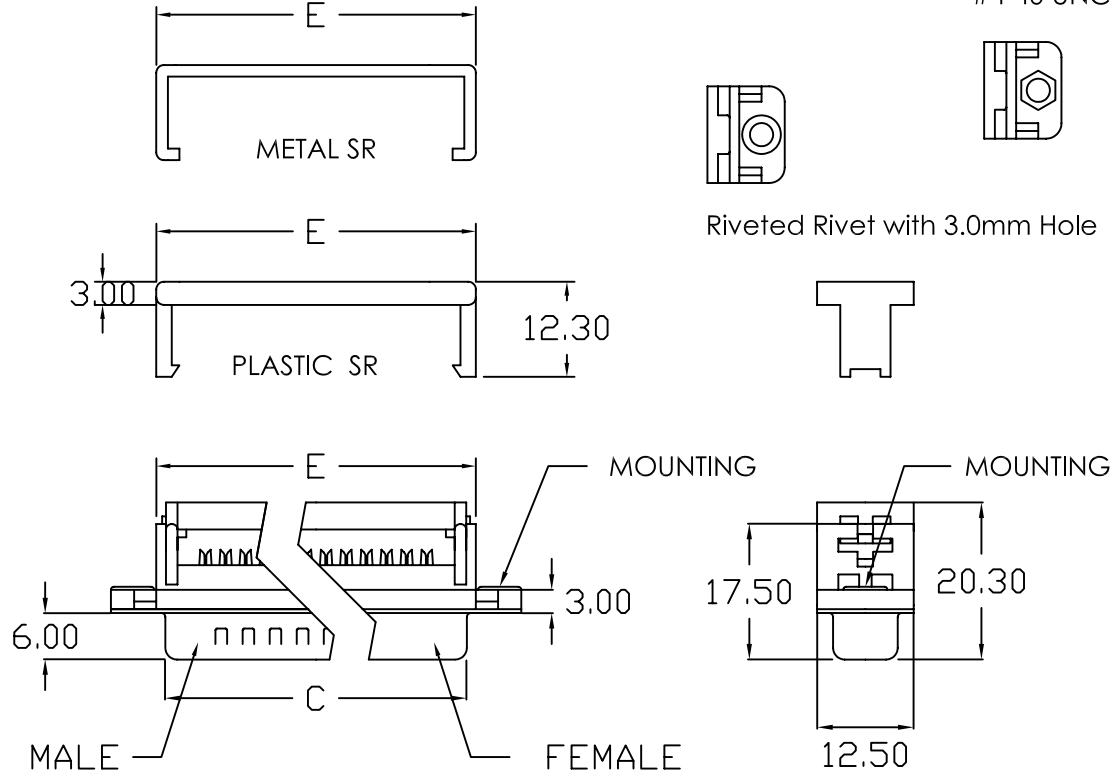

3027 -

CONTACT TYPE
0=Male (Plug)
1=Female (Receptacle)
NO. OF CONTACT
1=9Pin
2=15Pin
5=25Pin
6=37Pin
CONTACT PLATING
Blank=Selectiv Gold plated
F =10u" Inch Gold
E=15u" Inch Gold
D=30u" Inch Gold
MOUNTING OPTIONS
Blank=shell with 3.05mm Hole
B=Riveted Open Hex Nuts of 4#40 unc
ACCESSORY
Blank=With METAL Strain Relief
P=With PLASTIC Strain Relief

INSULATOR COLOR
Blank=Blue
Bk=Black

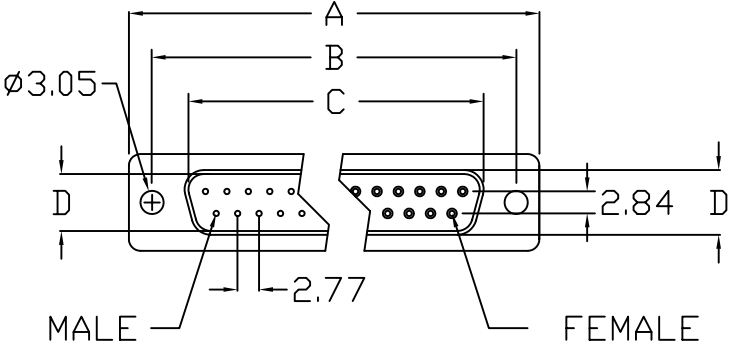

MATERIAL & ELECTRICAL
SHELL : Steel Tin plated
INSULATOR : PBT & 30% Glass-fibre UL 94-V0
CONTACT : Phosphor bronze
PLATING : Selective gold-flash over nickel
CURRENT RATING : 1A (28 AWG)
DIELECTRIC STRENGTH : 1000V for one minute
INSULATOR RESISTANCE : 1000MΩ Min. at 500V DC
TEMPERATURE : -55°C ~ +105°C

3027 Dimension (mm)						Tolerance : ±0.2
Position	Plug (M) / Recept (F)	A	B	C	D	E
9	Plug (M)	30.81	24.88	16.92	8.36	19.28
	Recept (F)			16.33	7.90	
15	Plug (M)	39.14	33.32	25.25	8.36	27.51
	Recept (F)			24.66	7.90	
25	Plug (M)	53.04	47.04	38.96	8.36	41.30
	Recept (F)			38.38	7.90	
37	Plug (M)	69.32	63.50	55.42	8.36	57.71
	Recept (F)			54.84	7.90	



HO CHIEN ENTERPRISE CO. LTD

TITLE :
D-SUB IDC TYPE STANDARD PROFILE METAL/PLASTIC FLANGE ;
FOR FLAT RIBBON CABLE

DR : RON CHEN	CHK : J.T.CHEN	APPD : C.Y.LIN
------------------	-------------------	-------------------

PAGE: 1 OF 1	HO CHIEN P/N. 3027 SERIES
-----------------	------------------------------