


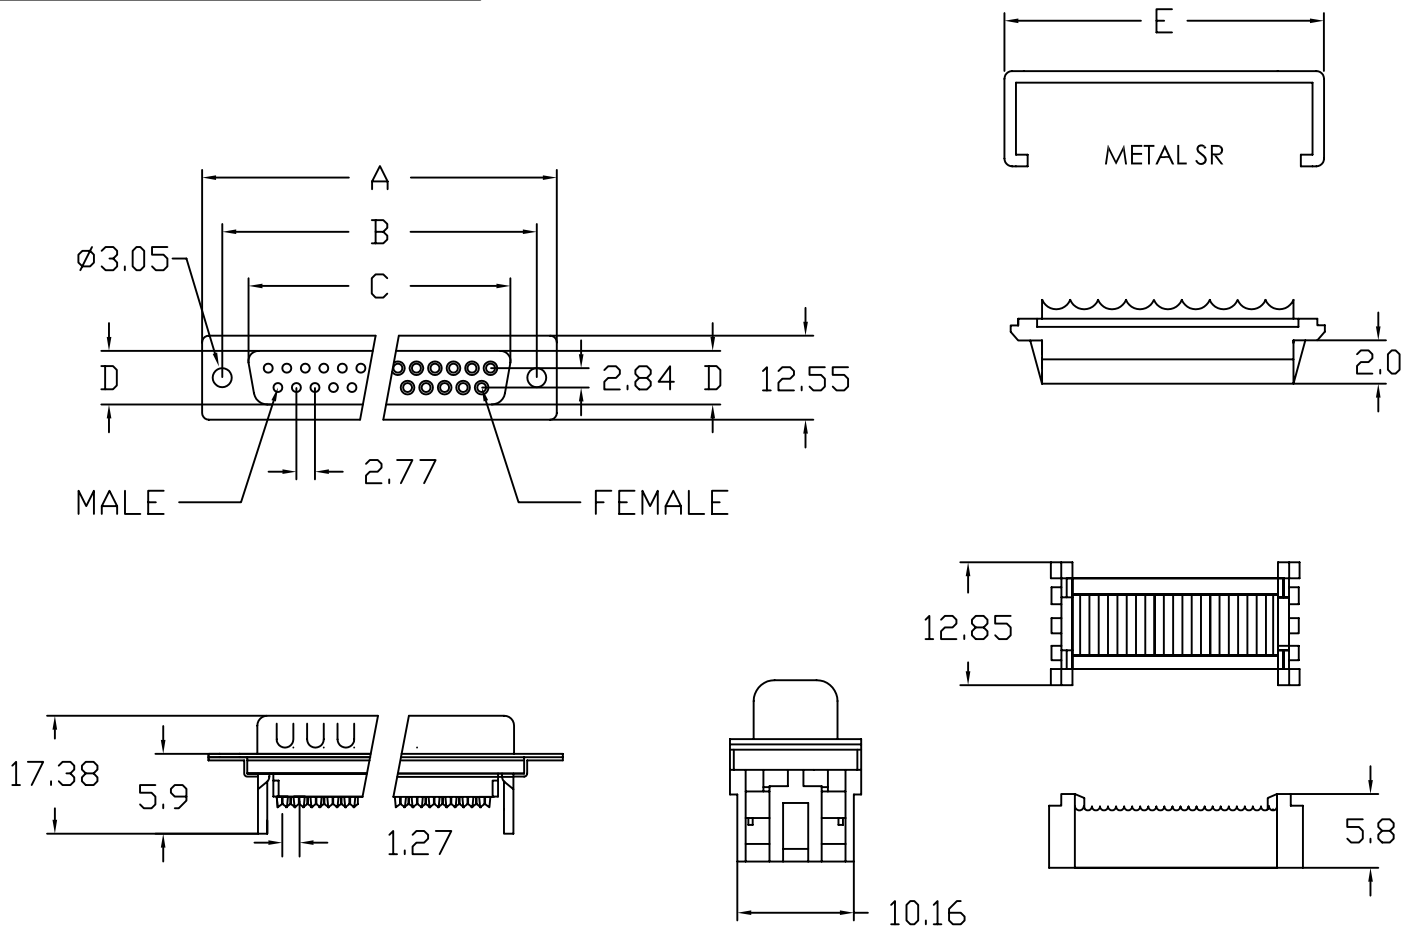

MATERIAL & ELECTRICAL
SHELL : Steel Tin Plated
INSULATOR : PBT & 30% Glass-fibre UL 94-V0
CONTACT : Phosphor bronze
PLATING : Selective gold plated over nickel
CURRENT RATING : 1A (28 AWG)
INSULATOR RESISANCE : 1000M Ω Min. at 500V DC
TEMPERATURE : -55°C ~ +105°C

REVISION	DESCREPTION	DATE	APPD
0	RoHS	DEC/01/2005	C.Y.LIN

3047 - ☐ ☐ ☐ ☐ ☐

CONTACT TYPE _____
0=Male (Plug)
1=Female (Receptacle)

NO. OF CONTACT _____
1=9Pin
2=15Pin
5=25Pin
6=37Pin

CONTACT PLATING _____
Blank=Selectiv Gold plated
F =10u" Inch Gold
E=15u" Inch Gold
D=30u" Inch Gold

MOUNTING OPTIONS _____
Blank=Shell with 3.05mm Hole
2N=Riveted 2.5mm Open Hex Nuts on Rear Shell

INSULATOR COLOR _____
Blank=Black
B=Blue

3047 Dimension (mm)						Tolerance : ± 0.2
Position	Plug (M) / Recept (F)	A	B	C	D	E
09	Plug (M)	30.81	24.88	16.92	8.36	19.28
	Recept (F)			16.33	7.90	
15	Plug (M)	39.14	33.32	25.25	8.36	27.51
	Recept (F)			24.66	7.90	
25	Plug (M)	53.04	47.04	38.96	8.36	41.30
	Recept (F)			38.38	7.90	
37	Plug (M)	69.32	63.50	55.42	8.36	57.71
	Recept (F)			54.84	7.90	



HO CHIEN ENTERPRISE CO. LTD

TITLE : D-SUB IDC TYPE STANDARD PROFILE METAL FLANGE ;
FOR FLAT RIBBON CABLE

DR : RON CHEN	CHK : J.T.CHEN	APPD : C.Y.LIN	PAGE: 1 OF 1	HO CHIEN P/N. 3047 SERIES
------------------	-------------------	-------------------	-----------------	------------------------------