




.J18	SHELL CENTER	COAX. SHIELD COAX. COND	A1	SHELL CENTER	PLAY 4 OUT
J17	SHELL CENTER	COAX. SHIELD COAX. COND	A2	SHELL CENTER	PLAY 2 OUT
J15	SHELL CENTER	COAX. SHIELD COAX. COND	A3	SHELL CENTER	PLAY 3 OUT
J14	SHELL CENTER	COAX. SHIELD COAX. COND	A4	SHELL CENTER	PLAY 1 OUT
J16	SHELL CENTER	COAX. SHIELD COAX. COND	A5	SHELL CENTER	RECORD 2 IN
J20	SHELL CENTER	COAX. SHIELD COAX. COND	A6	SHELL CENTER	LOOP
J19	SHELL CENTER	COAX. SHIELD COAX. COND	A7	SHELL CENTER	REF IN
J13	SHELL CENTER	COAX. SHIELD COAX. COND	A8	SHELL CENTER	RECORD 1 IN
—	WIRE COLOR		J1		
PRO PANEL	WIRE CONNECTION TABLE				SIGNAL NAME

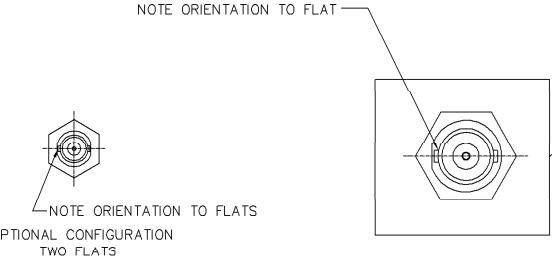

- NOTES: UNLESS OTHERWISE SPECIFIED
- 1 ALL DIMENSIONS ARE "MM".
2. ANY OPEN, MISWIRING, SHORT AND INTERMITTENT ARE NOT PERMITTED
3. INSULATION RESISTANCE: 5M OHMS/300V DC MIN.
4. CABLE MIN BEND RADII TO BE 23.0MM

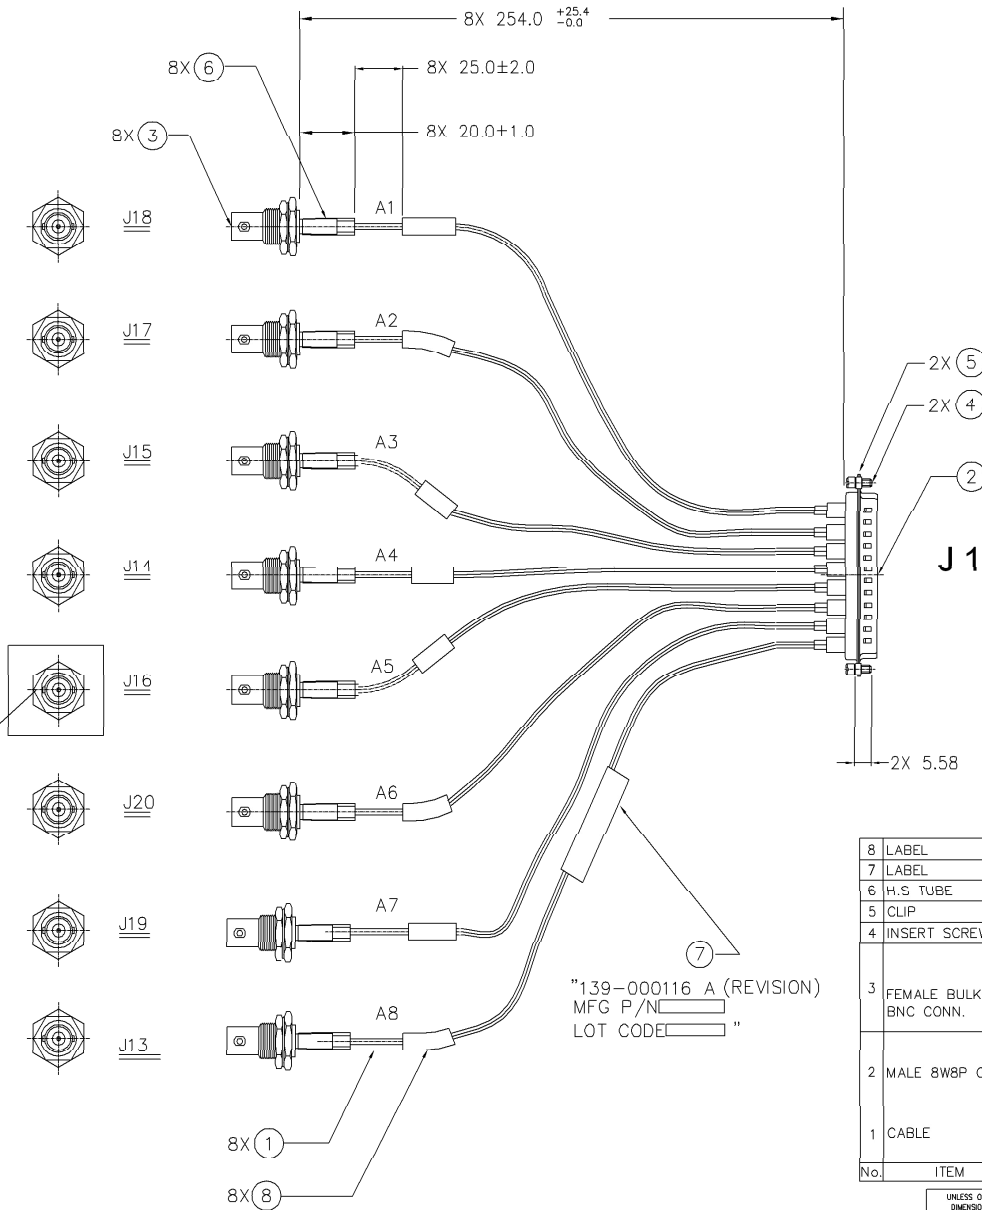

SEE TABULATION
FOR SIGNAL NAMES

REV	DESCRIPTION	BY	DATE	APPROVED
01	REVISED PRIOR TO RELEASE LENGTH INCREASED IDENTIFICATION LABEL & ADDED	JLP	11/16/05	JLP
02	REVISED PRIOR TO RELEASE CORRECTED LABEL ID, PROPANEL, CALLOUTS, AND LENGTH	JLP	11/28/05	JLP
03	REVISED IAW ECO BU377	JLP	2/21/06	JLP/DJD
A	REVISED IAW ECO BU449	JLP	12/1/06	AL/JW/HK

8 LABEL	8	SIGNAL NAME IDENTIFICATION LABEL (SEE TABULATION)
7 LABEL	1	CABLE IDENTIFICATION LABEL
6 H.S. TUBE	8	UL224, COLOR: BLACK
5 CLIP	2	IRON, NICKEL PLATED, T=0.3MM
4 INSERT SCREW	2	STEEL, #4-40UNC-2A NICKEL PLATED
3 FEMALE BULKHEAD BNC CONN.	8	BODY AND FERRULE: BRASS, NICKEL PLATED CONTACT: BRASS, 15u" GOLD PLATED INSULATOR: TEFLON; NUT: BRASS IMPEDANCE: 75Ω
2 MALE 8WB8P CONN.	1	INSULATOR: PBT, COLOR: BLACK, UL94V-0 SHELL: STEEL, NICKEL PLATED CONTACT: BRASS, 15u" GOLD PLATED, IMPEDANCE: 75Ω FERRULE: BRASS, GOLD FLASH
1 CABLE	8	CABLE: RG179/U 75Ω 28-30 AWG JACKET: BLACK PVC OD=2.55MM,

No.	ITEM	QTY	DESCRIPTION
8	LABEL	8	SIGNAL NAME IDENTIFICATION LABEL (SEE TABULATION)
7	LABEL	1	CABLE IDENTIFICATION LABEL
6	H.S. TUBE	8	UL224, COLOR: BLACK
5	CLIP	2	IRON, NICKEL PLATED, T=0.3MM
4	INSERT SCREW	2	STEEL, #4-40UNC-2A NICKEL PLATED
3	FEMALE BULKHEAD BNC CONN.	8	BODY AND FERRULE: BRASS, NICKEL PLATED CONTACT: BRASS, 15u" GOLD PLATED INSULATOR: TEFLON; NUT: BRASS IMPEDANCE: 75Ω
2	MALE 8WB8P CONN.	1	INSULATOR: PBT, COLOR: BLACK, UL94V-0 SHELL: STEEL, NICKEL PLATED CONTACT: BRASS, 15u" GOLD PLATED, IMPEDANCE: 75Ω FERRULE: BRASS, GOLD FLASH
1	CABLE	8	CABLE: RG179/U 75Ω 28-30 AWG JACKET: BLACK PVC OD=2.55MM,

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE		APPROVALS		DATE	
XXX ± .005		J. POKORNY	DEC/20/05		
.XX ± .015	ANGULAR ± .1°	J. POKORNY	DEC/20/05		
X ± .030		J. POKORNY	DEC/20/05		
DO NOT SCALE DRAWING					
SCALE: NONE					

CABLE VIDEO 6 CHANNEL	
HO CHIEN	
www.hochien.com	
PN# CA-B5042-0008B	
SIZE: D	REV: A
DATE: DEC/20/05	SCALE: NONE
SHEET: 1 OF 1	

RoHS