
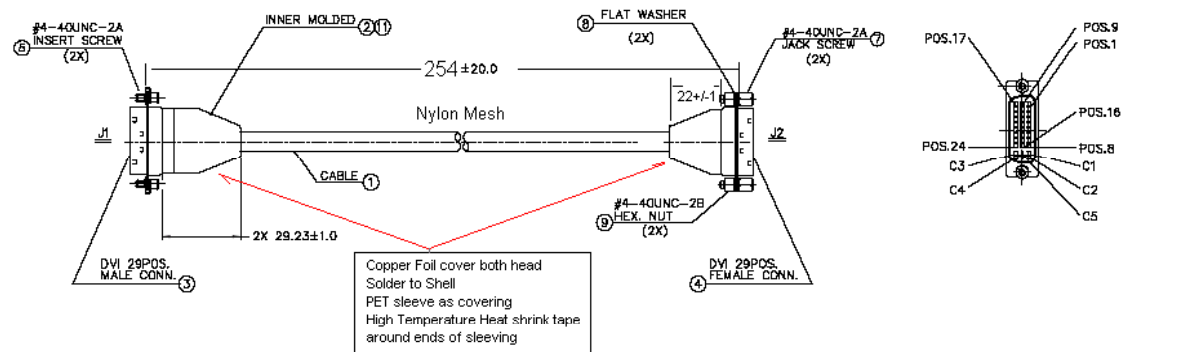


J1 PIN NO.	SIGNAL	WIRING		J2 PIN NO.
1	T.M.D.S 2-	BLACK	INSULATED	1
2	T.M.D.S 2+	GREY		2
3	T.M.D.S 2/4 SHIELD	DRAIN	INSULATED	3
3	T.M.D.S 2/4 SHIELD	DRAIN		3
4	T.M.D.S DATA 4-	GREEN		4
5	T.M.D.S DATA 4+	WHITE		5
6	DDC CLOCK		RED	6
7	DDC DATA		GREEN	7
8	ANALOG VERT SYNC		PURPLE	8
9	T.M.D.S DATA 1-	TAN	INSULATED	9
10	T.M.D.S DATA 1+	WHITE		10
11	T.M.D.S 1/3 SHIELD	DRAIN	INSULATED	11
11	T.M.D.S 1/3 SHIELD	DRAIN		11
12	T.M.D.S 3-	BLUE		12
13	T.M.D.S 3+	WHITE		13
14	+5V POWER		BLACK	14
15	GROUND		BROWN	15
16	HOT PLUG DETECT		WHITE	16
17	T.M.D.S DATA 0-	RED	INSULATED	17
18	T.M.D.S DATA 0+	WHITE		18
18	T.M.D.S 0/5 SHIELD	DRAIN	INSULATED	19
19	T.M.D.S 0/5 SHIELD	DRAIN		19
20	T.M.D.S DATA 5-	PURPLE	INSULATED	20
21	T.M.D.S DATA 5+	LT BLUE		21
22	T.M.D.S CLOCK SHIELD	DRAIN	INSULATED	22
23	T.M.D.S CLOCK+	PINK		23
24	T.M.D.S CLOCK-	ORANGE		24
C1	ANALOG RED	RED	COAX COND	C1
C5	ANALOG GROUND		COAX SHIELD	C5
C2	ANALOG GREEN	GREEN	COAX COND	C2
C5	ANALOG GROUND		COAX SHIELD	C5
C3	ANALOG BLUE	BLUE	COAX COND	C3
C5	ANALOG GROUND		COAX SHIELD	C5
C4	ANALOG HORIZ SYNC	GREY	COAX COND	C4
C5	ANALOG GROUND		COAX SHIELD	C5

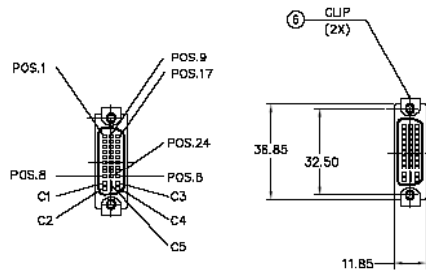

- NOTES:
1. ALL DIMENSIONS ARE "MM".
 2. ANY OPEN, MISWIRING, SHORT & INTERMITTENT ARE NOT PERMITTED.
 3. INSULATION RESISTANCE: 20M OHMS/250V DC MIN.

11	INNER MOLDED	16gm	PE FOR MOLDED, COLOR: NATURAL
10	H.S. TUBE	1PC	LD=#3.0MM, L=20.0MM, UL224, COLOR: BLACK
		3PCS	LD=#1.5MM, L=20.0MM, UL224, COLOR: BLACK
		8PCS	LD=#3.0MM, L=10.0MM, UL224, COLOR: BLACK
9	HEX. NUT	2PCS	#4-40UNC-2B, MATERIAL: BRASS FINISH: NICKEL PLATED
8	FLAT WASHER	2PCS	LD=#3.1MM, O.D=#5.5MM, NICKEL PLATED
7	JACK SCREW	2PCS	#4-40UNC-2A, NICKEL PLATED
6	CLIP	2PCS	IRON, NICKEL PLATED, T=0.30MM
5	INSERT SCREW	2PCS	#4-40UNC-2A, NICKEL PLATED
4	DVI FEMALE CONN.	2PC	CONTACT: COPPER ALLOY, GOLD FLASH INSULATOR: THERMOPLASTIC, COLOR: WHITE UL94V-0 SHELL: STEEL, NICKEL PLATED
3	DVI MALE CONN.	2PC	CONTACT: COPPER ALLOY, GOLD FLASH INSULATOR: THERMOPLASTIC, COLOR: WHITE UL94V-0 SHELL: STEEL, NICKEL PLATED
2	JUMP WIRE	1PC	#26, UL1061, L=35.0MM, COLOR: OPTION
1	CABLE	1PC	REMOVED +AL/NYLON +DRAIN WIRE +BRAID add nylon mesh UL2819, O.D=#7.0±0.2MM BLACK(800-BLK-DD1)
No.	ITEM	Q'TY	DESCRIPTION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: .XXX ± .005 .XX ± .010 .X ± .030 ANGULAR ± .1° 3D NOT SCALE DRAWING		APPROVALS DATE JEFF PIDKOWICZ 12/20/05		HO CHIEN www.hochien.com	
CABLE LOW PROFILE DUAL DVI-I/D 139-000124		SIZE PRJ NO. DNG NO. REV		CA-B5042-0019A 1.00	