
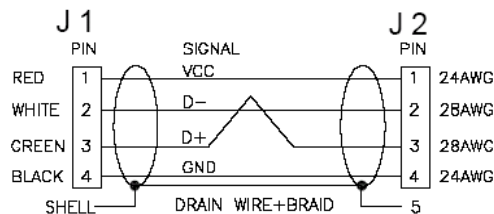


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
NC	RELEASED IAW ECO BU	X	X

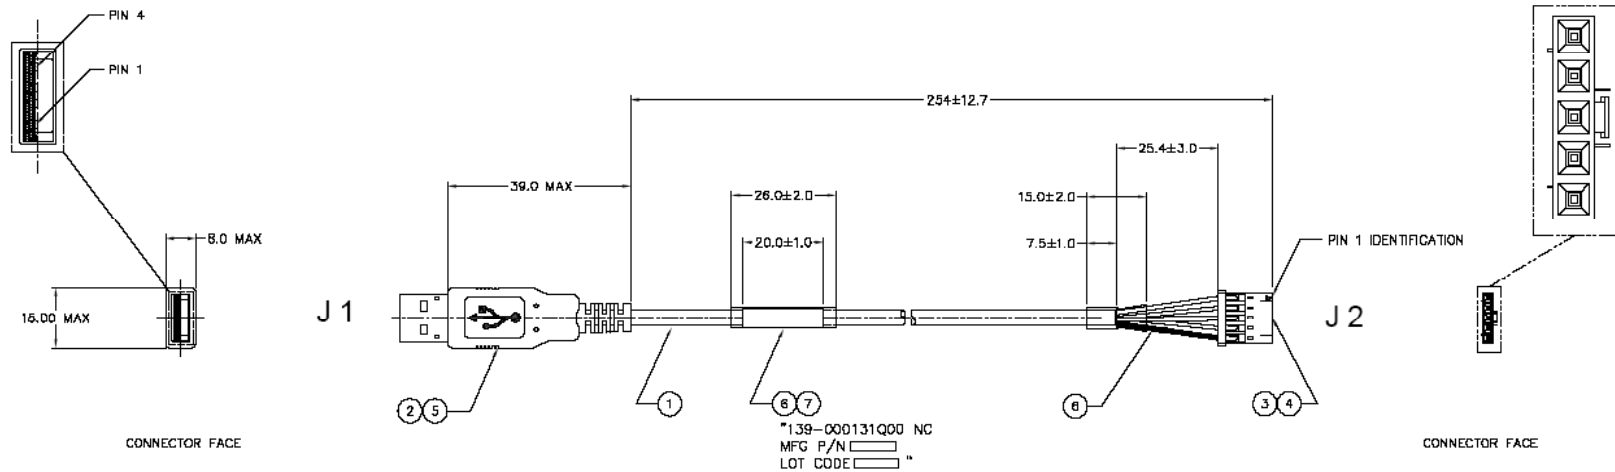

SPECIFICATION CONTROLLED

7	LABEL	1	W=20.0MM, L=18.0MM, CONTENT: SEE CHART
6	H.S. TUBE	1	I.D.=#6.0MM, UL224, L=26.0MM, COLOR: CLEAR
		1	I.D.=#1.5MM, UL224, L=27.40MM, COLOR: BLACK
5	OUTER MOLDED	A/R	PVC, SHORE A: 85±3, UL94V-0 COLOR: BLACK(600-BLK-001)
4	CONTACT	5	COPPER ALY, GOLD FLASH, THICKNESS: 0.2MM WIRE RANGE: #22~#28. MOLEX 16-02-0096
3	5 PIN HOUSING	1	UL94V-1, COLOR: BLACK, PITCH: 2.54MM MOLEX 50-57-9705
2	USB 4 PIN MALE CONN. ("A" TYPE) (SOLDER TYPE)	1	INSULATOR: THERMOPLASTIC, GLASS FILLED WITH COLOR: WHITE, UL94V-0
		1	CONTACT: COPPER ALLOY, 30u" GOLD PLATED SHIELD CASE: COLD ROLLED STEEL, NICKEL PLATED COVER: FOR USB-A CONN., UL94V-0,
1	USB 2.0 CABLE	1	#28X1P+#24X2C+AL./MYLAR+DRAIN WIRE+BRAID COVERAGE: 65% MIN.+JACKET: PVC O.D.=#4.8±0.1MM, COLOR: BLACK UL2725 & CSA II A/B FTI
NO.	ITEM	QTY	DESCRIPTION

NOTES: UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS ARE "MM".
2. ANY OPEN, MISWIRING, SHORT & INTERMITTENT ARE NOT PERMITTED.
3. CIRRIIS 1000H OR EQUIVALENT CABLE TESTER USING FOLLOWING PARAMETERS:
300V DC, 10ms, 2DM MIN. & 2.0 MAX.
4. CABLE MIN BEND RADII TO BE 7.6MM

RoHS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE				HO CHIEN www.hochien.com	
.XXX +- .005 .XX +- .015 .X +- .030 DO NOT SCALE DRAWING		APPROVALS		DATE	
1		J PIDKOWICZ		01/26/07	
MATERIAL		A LOMBARD		X	
		I LOZOVER		X	
FINISH		J WATKINS		x	
				SCALE: NONE	
				SHEET 1 OF 1	
				CABLE, USB-A PLUG TO AFTERBURNER3 139-000131Q00	
		SIZE		PRJ NO.	
		C		DWG NO.	
				CA-B5042-0020A	
				REV NC	