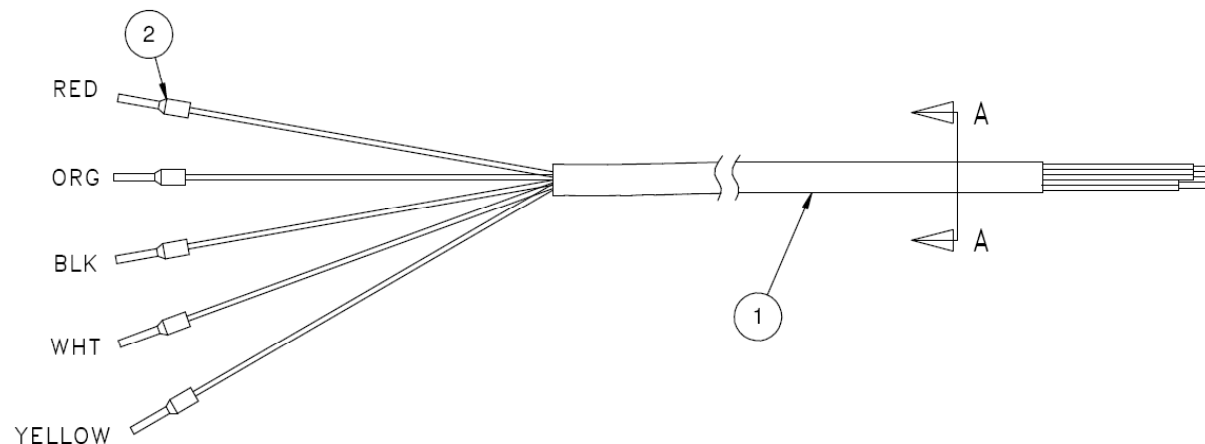
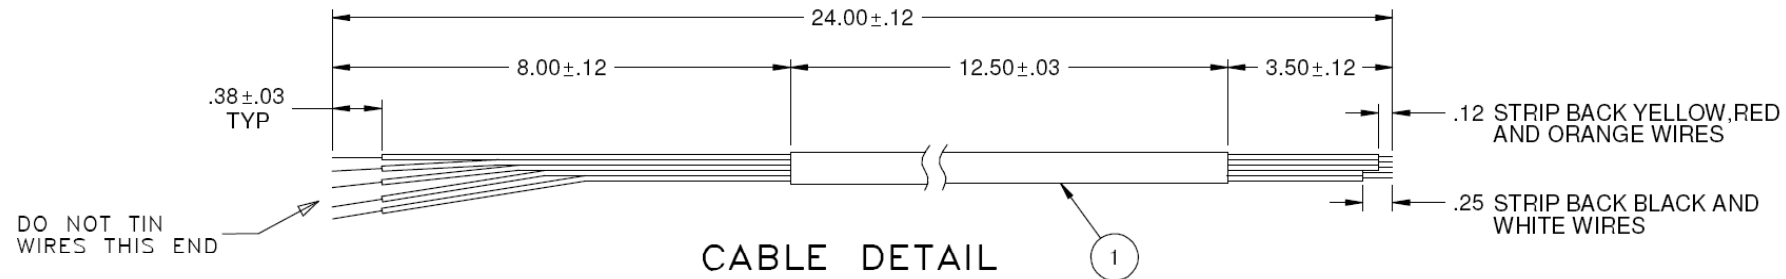


Cable, 5 Conductor PN# 3559189

CONDUCTOR: 20 AWG (41x36) TINNED COPPER

INSULATION: .006" WALL,TEFZEL INSULATION

UL STYLE 10109

COLOR CODE: BLACK,WHITE RED,ORANGE,YELLOW

CABLING: 5 CONDUCTORS CABLED TOGETHER WITH FILLER FOR ROUNDNESS

SEPARATOR: MYLAR

JACKET: .045" WALL,FLAME RETARDANT POLYURETHANE JACKET, BLACK

NOM O.D.: .230 ±.010

OPERATING TEMP.: -20 DEG C TO 80 DEG C

VOLTAGE RATING: 300 VOLT

UL STYLE: 20233 PASSES UL VW-1 FLAME TEST

2	CONNECTOR,PIN,FERRULE,20GA	1916633	5
1	CABLE,5-COND,20GA,SPECIAL	3559189	2
ITEM	DESCRIPTION	PART NO.	QTY.
Tolerance unless otherwise specified		DESCRIPTION	
Decimal 2 Places±.01 3 Places±.005 Fractional±1/64 Angular±1/2° Capacitance±10% Resistance±5% Welding±1/8		PROBE,ANALOG,METER CABLE ASSY,3559188	
SCALE 3:1 APP BY RKE DATE 9-25-07 DWN BY MDK DATE 9-20-07 CHK BY KAM DATE 9-25-07		REL ECO 44779 MCN	REV ECO
HO CHIEN www.hochien.com		PART NUMBER CA-B0600-0011	REV

PN# 1916633
Phoenix PN# 32 00 01 4

Ferrules with plastic sleeve, color range



Dimensioned drawing

