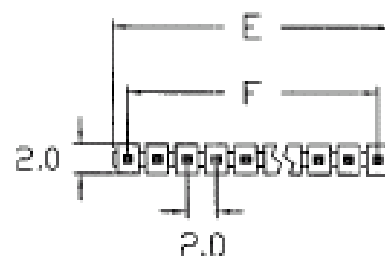


REVISION	DESCRIPTION	DATE	APPD
0	SET UP	MAR/17/2000	C.Y.LIN

2524-1X □□G7.6

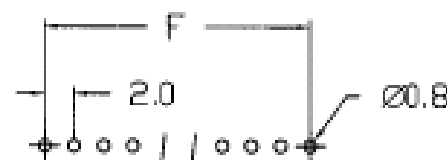
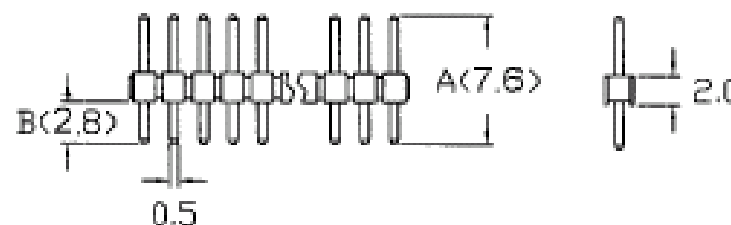


2524 - 1 x □□□□

NO. OF CONTACT 2 ~ 40 pos

CONTACT PLATING
G=Gold plated
T=Tin plated

PIN LENGTH
* Black color only

P.C.B. Board Layout

Dimension (mm)		2 to 40 pos, avail. per row
Tolerance : ± 0.2		
E	2.00 x No. of position per Row	
F	2.00 x No. of position per Row - 2.00	

MATERIAL & ELECTRICAL

INSULATOR : P.B.T. +30% Glass fiber UL 94-V0

CONTACT : Brass

CURRENT RATING : 1 Amp

CONTACT RESISTANCE : 20mΩ Max. at 100mA DC

INSULATOR RESISTANCE : 500MΩ Min. at 500V DC

TEMPERATURE : -55°C ~ +105°C

UNIT : mm

TOLERANCE : ± 0.2



HO CHIEN ENTERPRISE CO. LTD.

TITLE :

0.078" (2.00mm) PIN HEADER STRAIGHT

DR :

RON CHEN

CHK :

J.T.CHEN

APPD :

C.Y.LIN

HO CHIEN
PIN NO.

2524-1X □□G7.6-2.8