


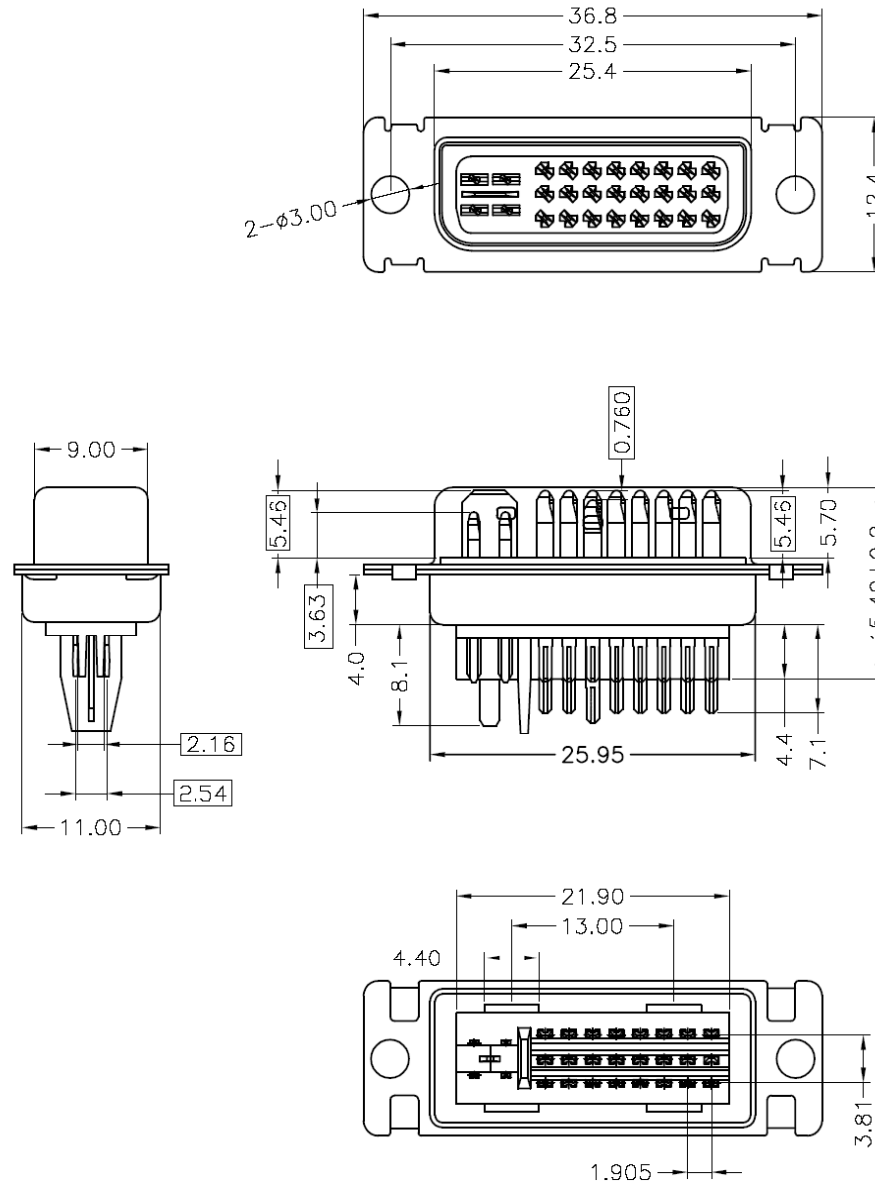

NOTE:

MATERIALS

- 1.HOUSING : PBT+25%
- 2.CONTACT : BRASS, GOLD/TIN PALTED
- 3.FRONT SHIELD : SPCC, NICKEL PALTED
- 4.BACK SHIELD : SPCC, TIN PLATED

SPECIFICATION:

- 1.CURRENT RATING: 1.5 AMP. MAX
- 2.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC R.M.S. FOR ONE MINUTE
- 3.INSULATION RESISTANCE: 1000M OHMS MIN.AT 500V DC
- 4.CONCACT RESISTANCE: 20m OHMS MAX
- 5.OPERATING TEMPERATURE: 0°C TO +85°C
- 6.MAX. PROCESSING TEMPERATURE:
230°C FOR 30~60 SECONDS(HI.-TEMP.PLASTIC)
- 7.THE 14PIN HIGHEST SHORT 0.76m/m OTHER PIN

備注:

重點尺寸標示: [X X]

PART NO.	PLATING	COLOR	FRONT SHELL	BACK SHELL
AVI+11245-20B	GOLD/TIN PLATED	BLACK	NICKEL PLATED	TIN PLATED
AVI+11245-29B	GOLD/TIN PLATED	WHITE	NICKEL PLATED	TIN PLATED
AVI+11245-T0B	GOLD(3u'')/TIN PLATED	BLACK	NICKEL PLATED	TIN PLATED
AVI+11245-T9B	GOLD(3u'')/TIN PLATED	WHITE	NICKEL PLATED	TIN PLATED
AV+11245-T8B	GOLD(3u'')/TIN PLATED	貝古色	NICKEL PLATED	TIN PLATED
AVI+11245-29B1	GOLD/TIN PLATED	WHITE	GOLD PLATED	TIN PLATED

單位(UNITS)	mm	HO CHIEN www.hochien.com	
數量(QU'TY)	N/A		
材料(MT'L)	SEE NOTE		
處理(FINISH)	SEE NOTE		
繪圖(DRAW)		圖名(NAME)	
設計(DE'N)		DVI 24+5公(BC) 半金黑 RoHS	
審校(CH'K)		料號(PART NUMBER)	AVI+11245-20B
核准(APP'D)		圖號(DRAW NUMBER)	RAVI1124520B
		圖檔(FILE NAME .DWG)	E:GCT/A/VI/11/B
		比例(SCALE)	1/1
		圖紙(SIZE)	A4
		頁次(SHEET)	1
		版次(REV.)	A

DIMENSIONS TOLERANCE

METRIC

.0= ±.30
.00= ±.20
.000= ±.10
.0000= ±.05
ANG.= ±2°