


DESCRIPTION: ROUND, JACKETED, RIBBON CABLE ASSEMBLY

CABLE SPECIFICATION	
DESCRIPTION	ROUND, JACKET RIBBON CABLE
# OF CONDUCTORS	14
WIRE GAGE	#28 AWG (7 X 36 AWG)
INSULATION – CONDUCTOR & JACKET	PVC
JACKET THICKNESS	0.4 mm MINIMUM
CABLE DIAMETER	7.37 mm
VOLTAGE RATING	300 V
TEMPERATURE RATING	80°C
FLAMMABILITY RATING	CL2, FT1
AGENCY APPROVALS	UL (STYLE 20267), CSA
APPROVED VENDOR	P/N
3M	3759/14
TYCO (AMP)	4-1437373-9
AMPHENOL (SPECTRA-STRIP)	159-2801-214

DESCRIPTION	FEMALE SOCKET TRANSITION WITH STRAIN RELIEF
# OF CONTACTS	14
HOUSING MATERIAL	PBT
CONTACT MATERIAL	PHOSPHOR BRONZE
CONTACT PLATING	GOLD OVER NICKEL
APPROVED VENDOR	P/N
HO-CHIEN	2540-14

POWERWARE	LENGTH	APPROVED VENDOR
P/N	L (mm)	HO-CHIEN
176200200-001	220	CA-C1267-0010

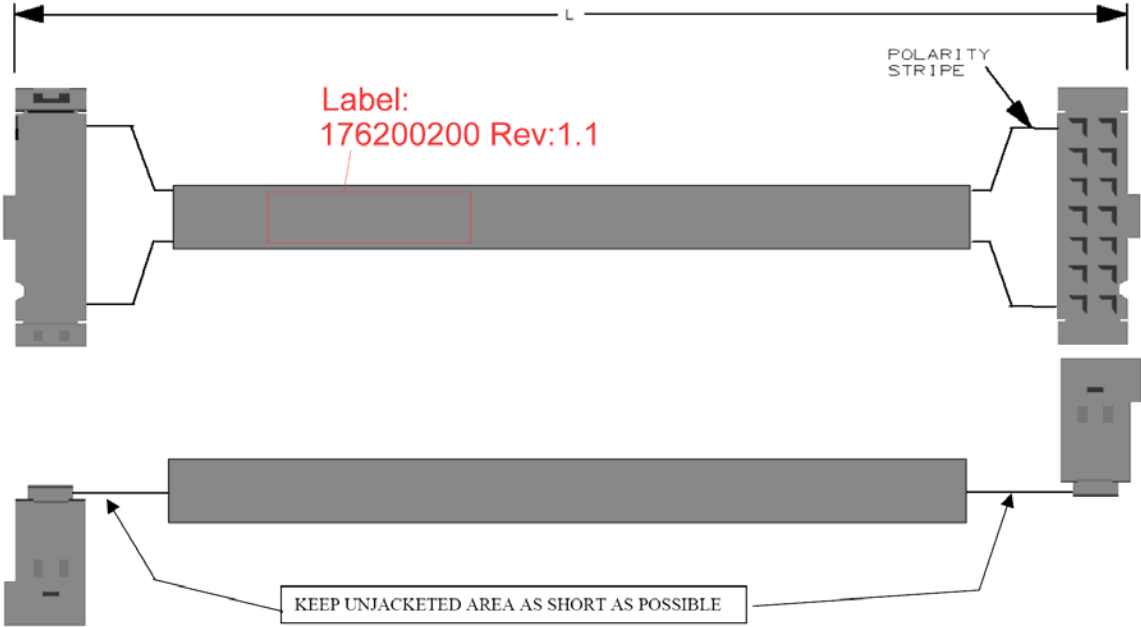

2540-14 (w Strain relief)
Ribbon Cable is not wrap under Strain relief.

Description: ROUND, JACKETED, RIBBON CABLE ASSEMBLY				Specification No. 176200200	
METRIC	Dimensions are in millimeters unless otherwise specified	Format: MS Word	Sheet: 1	of 1	
Modified By:			Modification Date:		
Status: RELEASED			Size: B		