



.098" (2,5mm) Headers



HCA2568-XX Series

Right Angle Pin Fully Shrouded Header


- 2-20 Circuits
- UL 94V-0 nylon 6/6
- Tin plated brass pins
- .027" (0,7mm) right angle round pins
- Polarized
- Mates with 2564 crimp terminal housing
- Friction lock
- UL File No.: E 114003
- CSA File No.: LR 86545



inches
mm

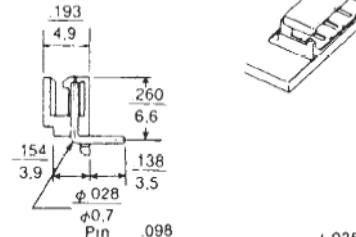

P.C. Board Hole Dimensions



Dimensional & Ordering Information-mm (in)

Circuits	Part No.	Dim. A	Dim. B	Circuits	Part No.	Dim. A	Dim. B
2	2568-02	2.5 (0.098)	7.5(0.295)	12	2568-12	27.5 (1.083)	32.5(1.280)
3	2568-03	5.0 (1.97)	10.0(0.394)	13	2568-13	30.0 (1.181)	35.0(1.378)
4	2568-04	7.5 (2.95)	12.5(0.492)	14	2568-14	32.5 (1.280)	37.5(1.476)
5	2568-05	10.0 (3.94)	15.0(0.591)	15	2568-15	35.0 (1.378)	40.0(1.575)
6	2568-06	12.5 (4.92)	17.5(0.689)	16	2568-16	37.5 (1.476)	42.5(1.673)
7	2568-07	15.0 (5.91)	20.0(0.787)	17	2568-17	40.0 (1.575)	45.0(1.772)
8	2568-08	17.5 (6.89)	22.5(0.886)	18	2568-18	42.5 (1.673)	47.5(1.870)
9	2568-09	20.0 (7.87)	25.0(0.984)	19	2568-19	45.0 (1.772)	50.0(1.969)
10	2568-10	22.5 (8.86)	27.5(1.083)	20	2568-20	47.5 (1.870)	52.5(2.067)
11	2568-11	25.0 (9.84)	30.0(1.181)				