


HCME040-350XX

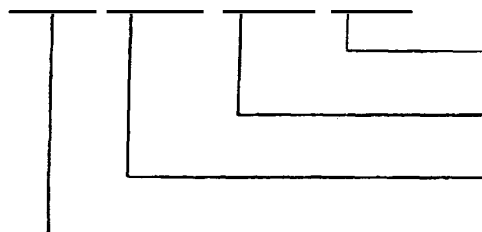





□ □ : Poles

350 : Pitch 3.50mm

040 : Standard

ME : Type

PCB Layout

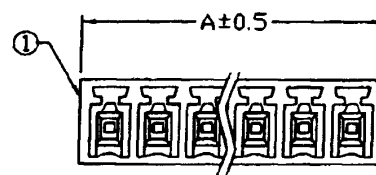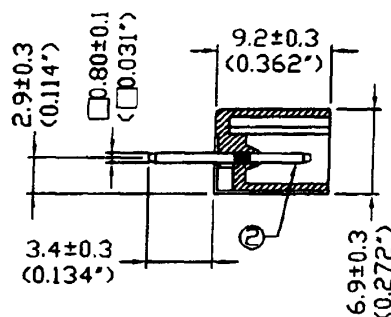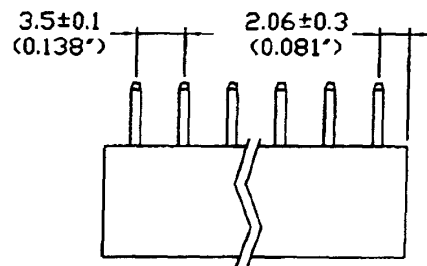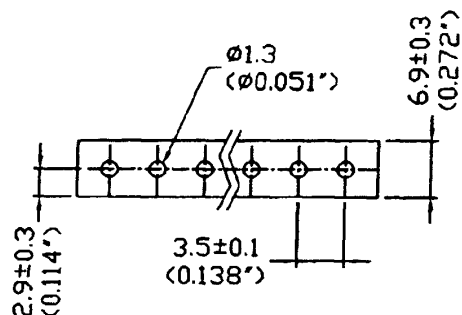

Pitch: 3.50mm (0.138inch)					
Poles	A(mm)	A(in)	Poles	A(mm)	A(in)
2	7.60	0.299	15	53.10	2.091
3	11.10	0.437	16	56.60	2.229
4	14.60	0.575	17	60.10	2.367
5	18.10	0.713	18	63.60	2.505
6	21.60	0.850	19	67.10	2.643
7	25.10	0.988	20	70.60	2.781
8	28.60	1.125	21	74.10	2.919
9	32.10	1.264	22	77.60	3.057
10	35.60	1.402	23	81.10	3.195
11	39.10	1.539	24	84.60	3.333
12	42.60	1.677	25		
13	46.10	1.815	26		
14	49.60	1.953	27		

Current rating : 12Amp AC150V

Insulation withstands volt : AC2000V min

Insulation resistance : >2000MΩ DC500V

Operation temperature : -40°C to +105°C

	Material		Plating/Finish	Remark
1	Insulating body	Polyamide 66(UL94V-0)		Green
2	Solder pin	Brass	Tin plated	
3				

HO CHIEN

www.hochien.com