


REV.	DESCRIPTION	DATE
02	區分塑膠材質	鄒運明 06-03-03
03	增加端子接觸點及杯口標注	肖澤 06-10-04

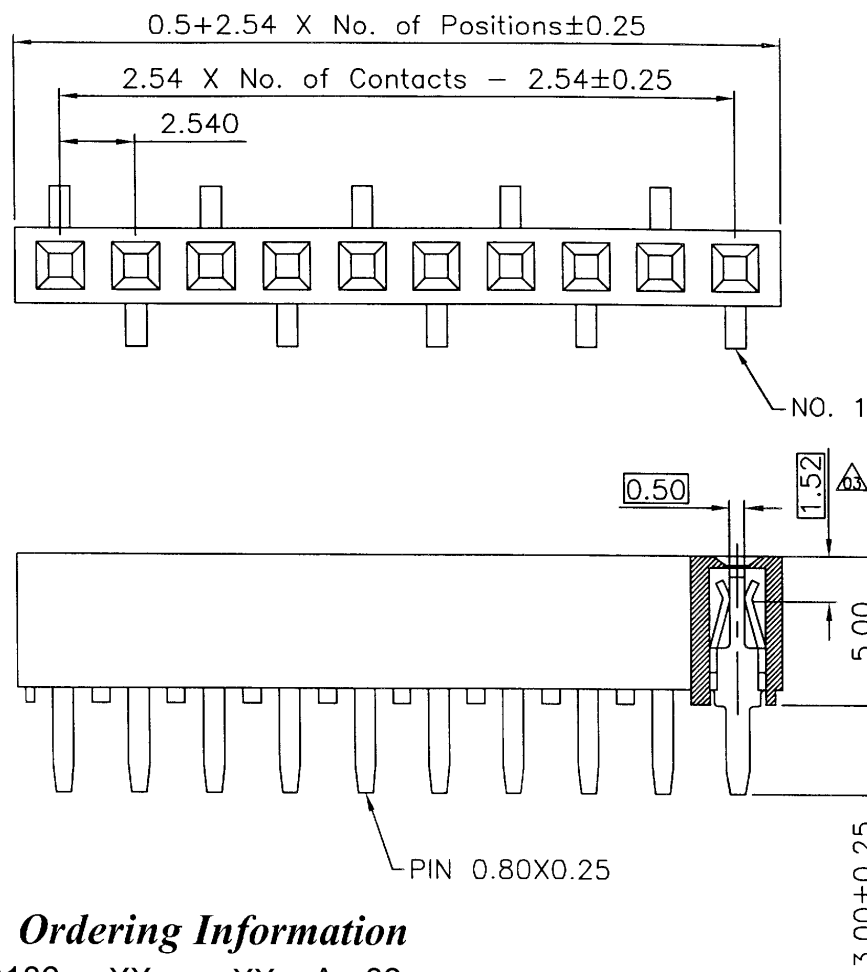


Ordering Information

SHD106 - XX XX A 03

No of Pin per Row
02 - 40

Contact Plating
01: Tin
02: Gold Flash

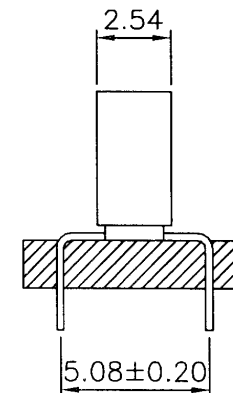

Specifications

Current Rating: 3Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 600V AC/DC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C

Materials


Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0

注: 02~24PIN塑膠材質用P.B.T料生產,
25~40PIN塑膠材質用PA6T+20%料生產.

Recommended P.C.Board

Hole Layout

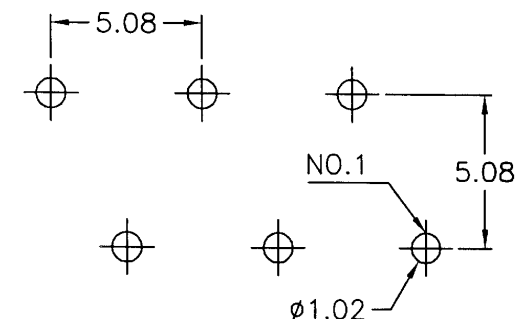

HO CHIEN www.hochien.com					GENERAL TOLERANCE		DRAWN K.J.T	DATE 10-20-97'	DWG. NO. SHD106-A03	TITLE 2.54 FEMALE HEADER SINGLE ROW DIP TYPE BASE 5.00H
					X. ± 5'	.X ±				
REV.	03	UNIT mm	SCALE 4=1		XX. ± 1'	.XX ± 0.25	APPROVE 宋永忠	DATE 06 10 04'	PART NO. SHD106- XX XX A 03	
					XXX. ± 0.5'	.XXX ± 0.13				