


HO CHIEN ENTERPRISE CO., LRD.


3.5Ø STEREO PHONE JACK

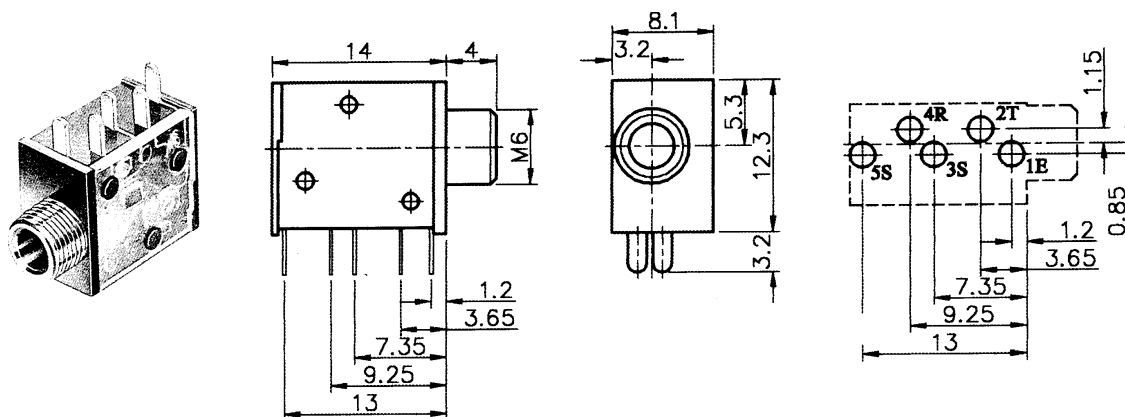

SPECIFICATION:
 Insulation Resistance:
 100M OHM Min. at
 500V D.C.
 Dielectric Strength:
 500V A.C. / 1 Minute
 Contact Resistance:
 30m OHM Max.

SCHEMATIC				
MODEL NO. WITH SCREW	UJ-3507-A	UJ-3507-B	UJ-3507-C	UJ-3507-D
MODEL NO. W/O SCREW	UJ-3507-A-N	UJ-3507-B-N	UJ-3507-C-N	UJ-3507-D-N

3.5φ STEREO PHONE JACK

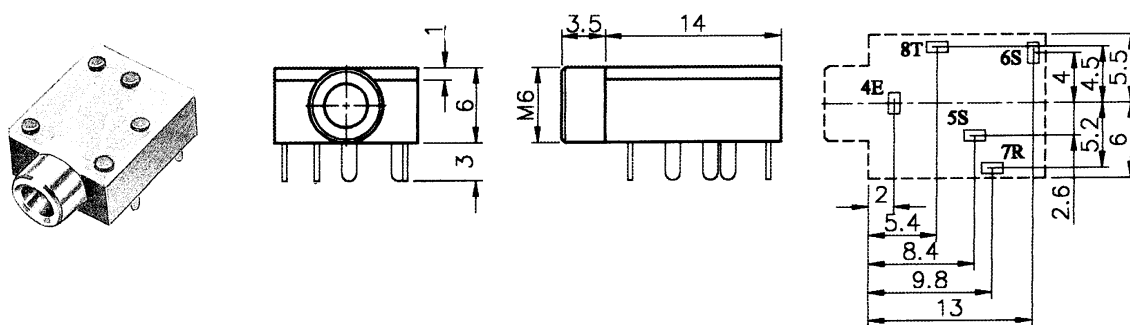

SPECIFICATION:
 Insulation Resistance:
 100M OHM Min. at
 500V D.C.
 Dielectric Strength:
 500V A.C. / 1 Minute
 Contact Resistance:
 30m OHM Max.

SCHEMATIC				
MODEL NO. WITH SCREW	UJ-3508-A	UJ-3508-B	UJ-3508-C	UJ-3508-D
MODEL NO. W/O SCREW	UJ-3508-A-N	UJ-3508-B-N	UJ-3508-C-N	UJ-3508-D-N