


REVISIONS				
REV	ECO	DESCRIPTION	DATE	APPROVED
A	XXXXXX	INITIAL RELEASE	2011-03-31	DHB

#### NON-WOVEN POLYESTER FABRIC TAPE

An expandable braided sleeving made of PET. The diameter will be the smallest that allows the wires to pass through, most likely a 1/8" diameter. Here is an example:  
<http://www.cabletiesandmore.com/ExpandableSleeving.php>. The sleeving will need to be secured with either a small zip tie or a piece of heat shrink tubing. The length of sleeve is 100mm.

#### Pinout Diagram

VFD		CN1
1	↔	1
2	↔	2
3	↔	3
4	↔	4
5	↔	5
6	↔	6

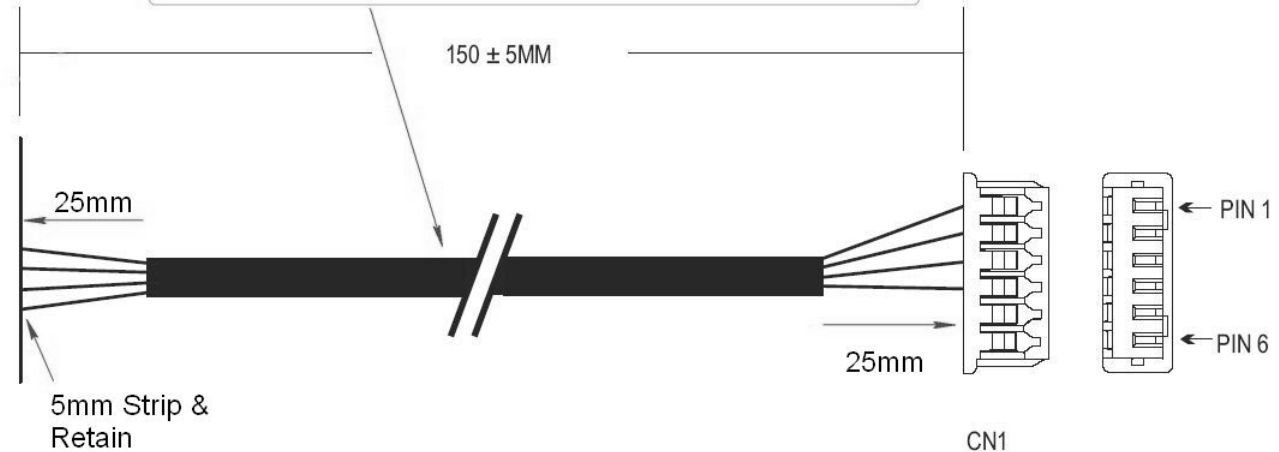

#### NOTES:

- WIRES ARE UL 1061 28AWG STRANDED; COLOR SHALL BE BLACK
- WIRES SHALL BE WRAPPED WITH BLACK NON-WOVEN POLYESTER FABRIC TAPE
- USE ONLY APPROVED PARTS
- THE LENGTH DOES NOT INCLUDE CONNECTORS
- THE TOLERANCE FOR THE LENGTH IS +/- 5MM
- CABLE PART NUMBER IS CB10771; VFD P/N IS LC10057
- WIRES SHALL BE INSERTED FROM THE BACK OF THE VFD ASSEMBLY AND SOLDERED ON THE FRONT
- CABLE MUST BE 100% CHECKED FOR CONTINUITY AND SHORTS
- ATTACH LABEL INCLUDING PART NUMBER, REVISION AND DATE
- MEETS RESTRICTIONS OF HAZARDOUS SUBSTANCES REQUIREMENTS (ROHS) AS DEFINED BY DIRECTIVE 2002/95/EC. FIRST ARTICLE SHIPMENT AND ALL SUBSEQUENT REVISION FIRST ARTICLES MUST CONTAIN ROHS

UNITS
ALL DIMENSIONS IN MILLIMETERS EXCEPT AS NOTED
PERFECT FORM AT MMC REQUIRED FOR INTERRELATED FEATURES
X.X = ±0.3
X.XX = ±0.13
ANGLES: ±.5°
MACHINED SURFACES 250 / AA
BREAK OUTSIDE AND INSIDE CORNERS 0.1 TO 0.40 MAX
THREAD LENGTH DIMS. ARE FULL THREAD
INTERPRET DRAWINGS PER ANSI Y14.5M

[www.hochtien.com](http://www.hochtien.com)

#### DESCRIPTION

P1230 2x20 Customer Display Cable  
CB10771