
N; PROPERTY, CONTAINS PROPRIETARY INFORMATION AND MUST BE RETURNED UPON REQUEST. R DIVULGE TO OTHER PARTIES WITHOUT WRITTEN CONSENT OF RADIANT SYSTEMS.

REVISIONS				
	ECO	DESCRIPTION	DATE	APPROVED
	XXXXXX	INITIAL RELEASE	2011-03-31	DHB

REV Α

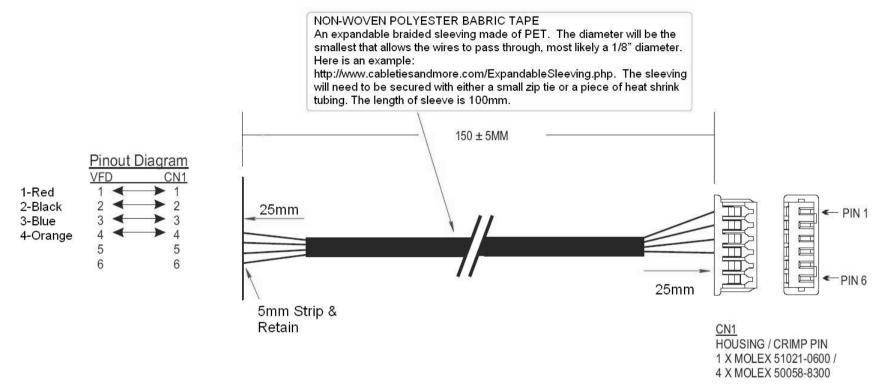

## NOTES:

- 1. WIRES ARE UL 1061 28AWG STRANDED: COLOR SHALL BE BLACK
- 2. WIRES SHALL BE WRAPPED WITH BLACK NON-WOVEN POLYESTER FABRIC TAPE
- 3. USE ONLY APPROVED PARTS
- 4. THE LENGTH DOES NOT INCLUDE CONNECTORS
- 5. THE TOLERANCE FOR THE LENGTH IS +/- 5MM
- 6. CABLE PART NUMBER IS CB10771; VFD P/N IS LC10057
- 7. WIRES SHALL BE INSERTED FROM THE BACK OF THE VFD ASSEMBLY AND SOLDERED ON THE FRONT
- 8. CABLE MUST BE 100% CHECKED FOR CONTINUITY AND SHORTS
- 9. ATTACH LABEL INCLUDING PART NUMBER, REVISION AND DATE
- 10. MEETS RESTRICTIONS OF HAZARDOUS SUBSTANCES REQUIREMENTS (ROHS) AS DEFINED BY DIRECTIVE 2002/95/EC. FIRST ARTICLE SHIPMENT AND ALL SUBSEQUENT REVISION FIRST ARTICLES MUST CONTAIN ROHS CERTIFICATE OF COMPLIANCE.

## UNITS ALL DIMENSIONS IN MILLIMETERS www.hochien.com EXCEPT AS NOTED PERFECT FORM AT MMC REQUIRED FOR INTERRELATED FEATURES X.XX = ±0.13 ANGLES: ± .5° DESCRIPTION MACHINED SURFACES 250 / AA BREAK OUTSIDE AND INSIDE CORNERS 0.1 TO 0.40 MAX P1230 2x20 Customer Display Cable THREAD LENGTH DIMS. ARE FULL THREAD CB10771 INTERPRET DRAWINGS PER ANSI Y14.5M 1982 STD. ISSUED: 2011-03-31 CA-B6070-0194A DRAWN BY: DBennett

SHEET: | of |

SCALE: