

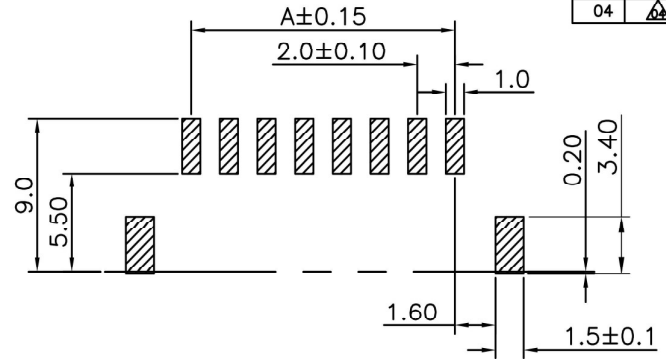
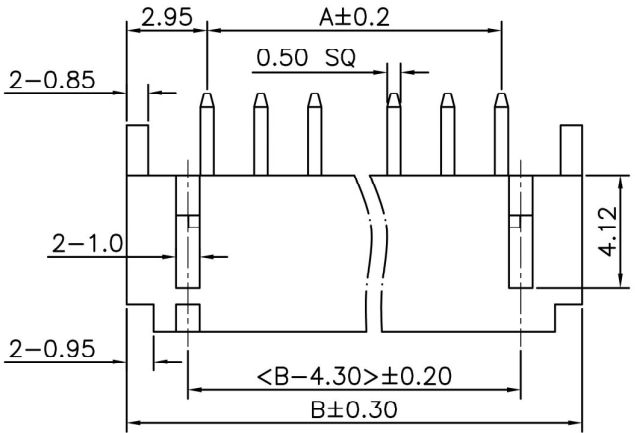


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.		
02	△	Change Part NO.		
03	△			
04	△			

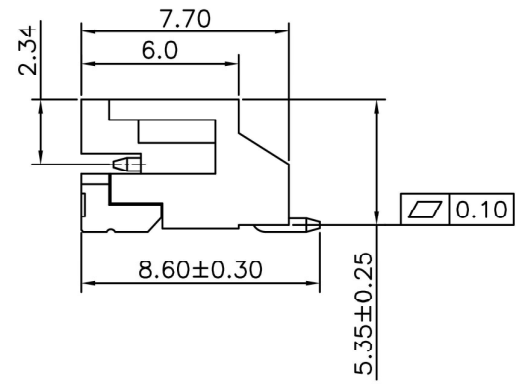

P.C.B LAYOUT

Specifications
 Current Rating: 2.0Amp (AC/DC)
 Voltage Rating: 100V(AC/DC)
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 800V AC/Minute
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -25°C to +85°C
Materials
 Contact Material: Brass
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 or the equivalent material
 All materials must meet Greenconn requirement for environment protection.

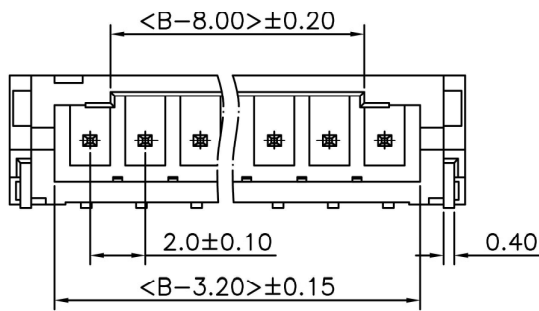

No. of PIN/ROW	Dimension Information	
	A	B
02	2.00	8.00
03	4.00	10.00
04	6.00	12.00
05	8.00	14.00
06	10.00	16.00
07	12.00	18.00
08	14.00	20.00
09	16.00	22.00
10	18.00	24.00
11	20.00	26.00
12	22.00	28.00
13	24.00	30.00
14	26.00	32.00
15	28.00	34.00
16	30.00	36.00

Ho Chien www.hochien.com		GENERAL TOLERANCE		DESIGN:	DATE:	TITLE: PITCH 2.00 WAFER SMT TYPE
		X.*±5.0°	X.±0.30	CHECKED:	DATE:	
.X*±3.0°	.X±0.25	AUDITED:	DATE:	PART NO. HCA2018-XXSM		
REV. 04	UNIT. mm	SCALE. 4:1	PAGE. 1/1	.XX*±2.0°	.XX±0.15	
				.XXX*±1.0°	.XXX±0.10	