



REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
X1	PROTO	07-01-04	TFLORES

1. SOLDER ITEMS 2 AND 3 TO ITEM 1
2. CRIMP ITEMS 2 AND 3 TO ITEMS 4
3. INSTAIL INTO UPPER ASSY. UNIT
4. SLIDE ITEM 5 OVER ITEMS 4

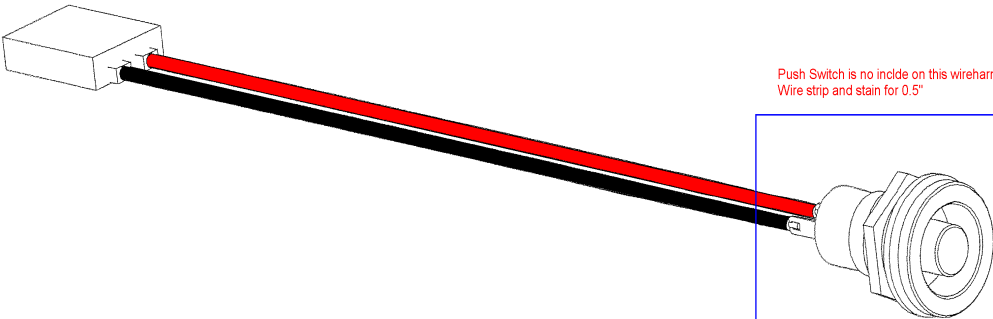

Push Switch is no incldo on this wireharness.
Wire strip and stain for 0.5"

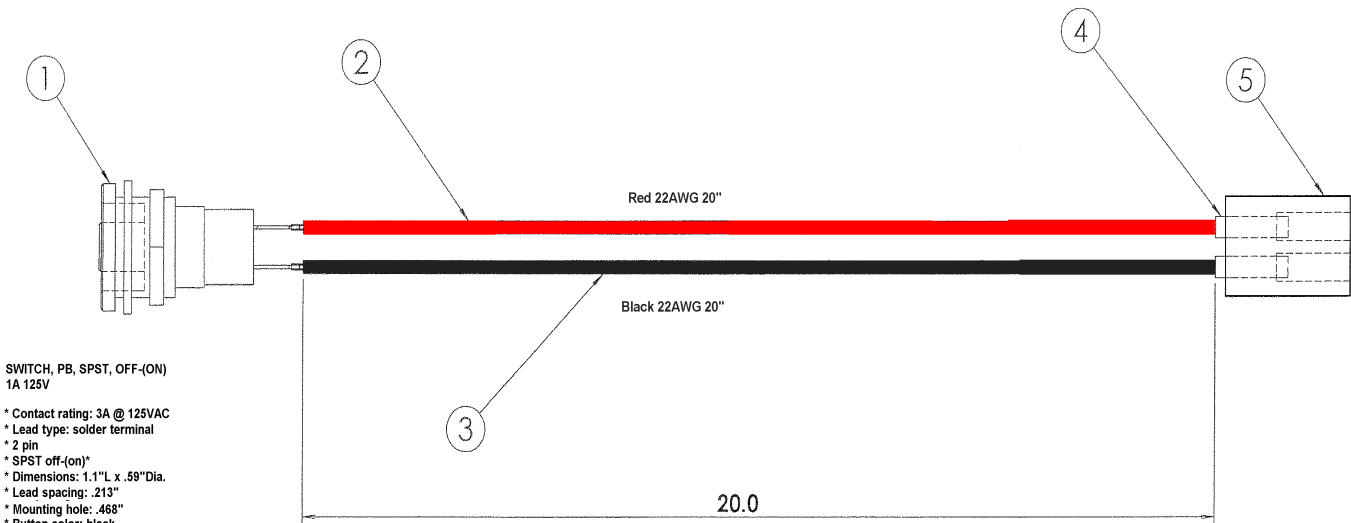

SWITCH, PB, SPST, OFF-(ON)
1A 125V

- * Contact rating: 3A @ 125VAC
- * Lead type: solder terminal
- * 2 pin
- * SPST off-(on)*
- * Dimensions: 1.1"L x .59"Dia.
- * Lead spacing: .213"
- * Mounting hole: .468"
- * Button color: black



Push Switch is no incldo on this wireharness.
Wire strip and stain for 0.5"

5	HO CHIEN # 2520-1X2	HO CHIEN	1
4	HO CHIEN # 2520-10GT	HO CHIEN	2
3	BLACK 22 GAUGE WIRE 20 INCH LONG	DeAnzo/Encore	1
2	RED 22 GAUGE WIRE 20 INCH LONG	DeAnzo/Encore	1
1	POWER SWITCH W/WASHER & NUT (164471)	JAMCO	1
ITEM #	DESCRIPTION AND PART OR IDENTIFYING NUMBER	MFG.	QTY. REQD.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:			CAD GENERATED DRAWING. DO NOT MANUALLY UPDATE		HO CHIEN www.hochien.com	
FRACTIONS	DECIMALS	ANGLES	APPROVALS	DATE		
±	.XX± .02	+ .1	DRAWN		POWER SWITCH ASSY.	
	.XXX±.010		TONY F.	07/01/04		
MATERIAL	SEE BOM	ENG	TONY F.	07/01/04		
FINISH	NONE	CUST	REN 7/1			
DO NOT SCALE DRAWING						
			SIDE B	DWG. NO.	CA-C4101-0004	REV. X1
			SCALE	CAD FILE:	SHEET 1 OF 1	

POWER SWITCH ASSY.