


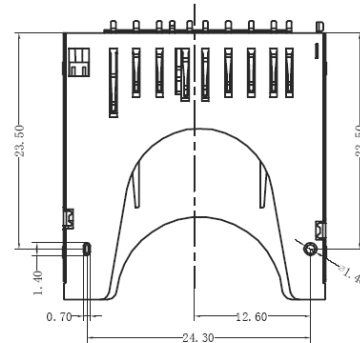



REVNO	REVISION NOTE	DATE	SIGNATURE	CHECKED
A/0	RELEASED	07/7/08	黄志成	黄家斌

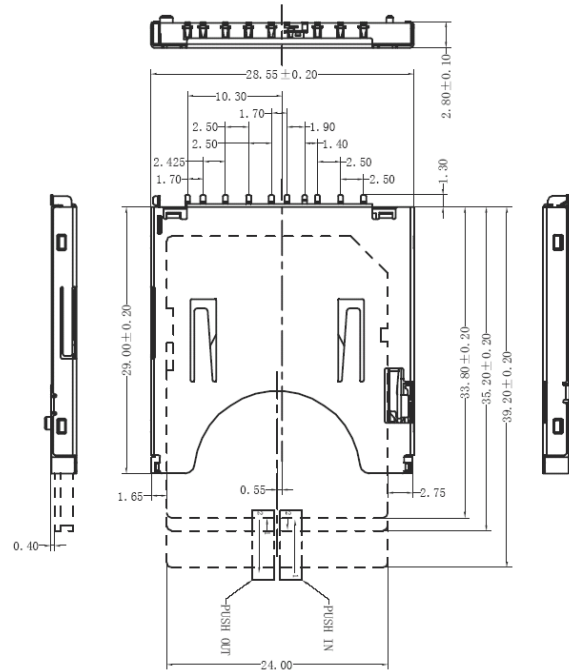


WITHOUT CARD



CARD INSERTED
WRITE PROJECT:LOCK



CARD INSERTED
WRITE PROJECT:UNLOCK

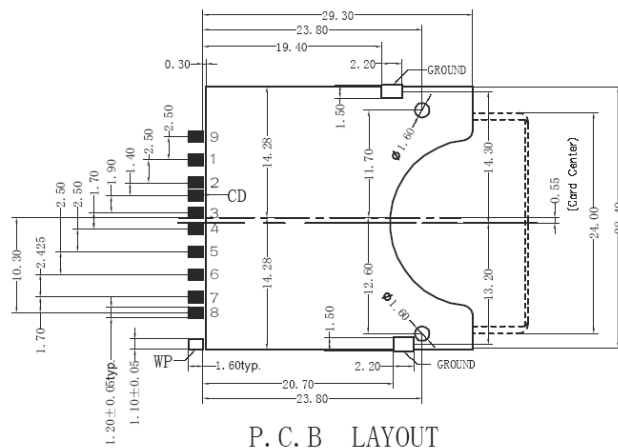

Electrical

Voltage:100V AC(RMS)/DC

Current:0.5 A AC(RMS)/DC

Contact Resistance:80mΩ max

Insulation Resistance: 1000M Ω min

Dielectric Withstanding Voltage:1000VAC/RMS

Operating Temp:- $-25^{\circ}\text{C} \sim +90^{\circ}\text{C}$

Materials

Housing:High temperature Plastic UL 94V-0

Terminal:Copper Alloy

SD CARD PIN DESIGN			
Pin#	Name	Type	Description
1	CD/DAT3	I/O/PP	Card Detect/ Data Line [Bit 3]
2	CMD	PP	Command/Response
3	Vss1	S	Supply voltage ground
4	Vss	S	Supply voltage
5	CLK	I	Clock
6	Vss2	S	Supply voltage ground
7	DAT0	I/O/PP	Data Line [Bit 0]
8	DAT1	I/O/PP	Data Line [Bit 1]
9	DAT2	I/O/PP	Data Line [Bit 2]

ITEMREF	QUANTITY:	SEE NOTES	PART_NUMBER: 50401011		
DESIGNED		CHECKED	APPROVED	UNIT mm	SCALE 1:1
HO CHIEN www.hochien.com			SD卡座		
			DRAWING_NUMBER		EDITION A/0